



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97


Test Date: May-2022

Test Sponsor: Altos Computing Inc.

Hardware Availability: Apr-2021

Tested by: Altos Computing Inc.

Software Availability: May-2022

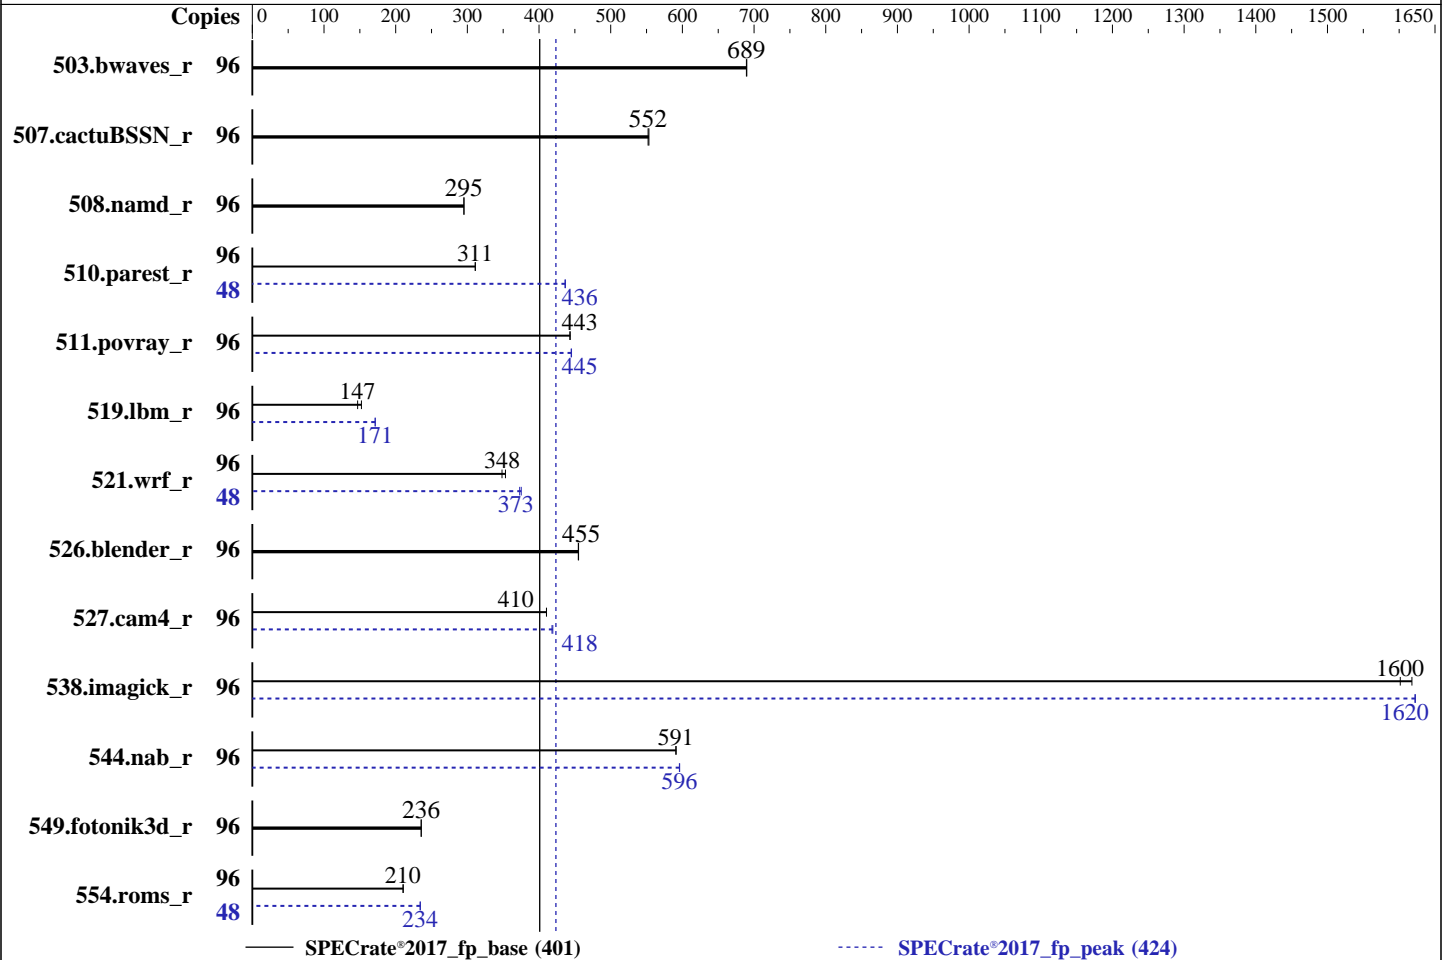

Hardware

CPU Name: AMD EPYC 7413
 Max MHz: 3600
 Nominal: 2650
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 1.6 TB SATA SSD
 Other: None

Software

OS: Ubuntu 20.04.3 LTS
 kernel 5.4.0-113-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Version M09 Released Nov-2021
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Date: May-2022

Test Sponsor: Altos Computing Inc.

Hardware Availability: Apr-2021

Tested by: Altos Computing Inc.

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1395	690	<u>1397</u>	<u>689</u>			96	1395	690	<u>1397</u>	<u>689</u>		
507.cactuBSSN_r	96	<u>220</u>	<u>552</u>	220	553			96	<u>220</u>	<u>552</u>	220	553		
508.namd_r	96	309	295	<u>309</u>	<u>295</u>			96	309	295	<u>309</u>	<u>295</u>		
510.parest_r	96	<u>807</u>	<u>311</u>	807	311			48	<u>288</u>	<u>436</u>	287	437		
511.povray_r	96	505	444	<u>506</u>	<u>443</u>			96	503	445	<u>504</u>	<u>445</u>		
519.lbm_r	96	<u>689</u>	<u>147</u>	665	152			96	<u>590</u>	<u>171</u>	590	171		
521.wrf_r	96	<u>617</u>	<u>348</u>	609	353			48	<u>288</u>	<u>373</u>	287	375		
526.blender_r	96	<u>321</u>	<u>455</u>	321	455			96	<u>321</u>	<u>455</u>	321	455		
527.cam4_r	96	409	410	<u>409</u>	<u>410</u>			96	<u>402</u>	<u>418</u>	400	419		
538.imagick_r	96	148	1620	<u>149</u>	<u>1600</u>			96	147	1620	<u>147</u>	<u>1620</u>		
544.nab_r	96	<u>273</u>	<u>591</u>	273	591			96	<u>271</u>	<u>596</u>	271	596		
549.fotonik3d_r	96	1588	236	<u>1588</u>	<u>236</u>			96	1588	236	<u>1588</u>	<u>236</u>		
554.roms_r	96	<u>726</u>	<u>210</u>	724	211			48	325	234	<u>326</u>	<u>234</u>		

SPECrate®2017_fp_base = 401

SPECrate®2017_fp_peak = 424

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc300_milan_B_lib/lib;/home/cpu2017/amd_rate_a  
    occ300_milan_B_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration:

Power Policy Quick Settings set to Best Performance

NUMA Nodes Per Socket set to NPS4

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on ubuntu Thu May 26 11:35:45 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7413 24-Core Processor
```

```
    2 "physical id"s (chips)
```

```
    96 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Date: May-2022

Test Sponsor: Altos Computing Inc.

Hardware Availability: Apr-2021

Tested by: Altos Computing Inc.

Software Availability: May-2022

Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

```

From lscpu from util-linux 2.34:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          48 bits physical, 48 bits virtual
CPU(s):                 96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  1
Model name:             AMD EPYC 7413 24-Core Processor
Stepping:               1
Frequency boost:        enabled
CPU MHz:                1819.326
CPU max MHz:            2650.0000
CPU min MHz:            1500.0000
BogoMIPS:               5300.21
Virtualization:         AMD-V
L1d cache:              1.5 MiB
L1i cache:              1.5 MiB
L2 cache:               24 MiB
L3 cache:               256 MiB
NUMA node0 CPU(s):     0-5,48-53
NUMA node1 CPU(s):     6-11,54-59
NUMA node2 CPU(s):     12-17,60-65
NUMA node3 CPU(s):     18-23,66-71
NUMA node4 CPU(s):     24-29,72-77
NUMA node5 CPU(s):     30-35,78-83
NUMA node6 CPU(s):     36-41,84-89
NUMA node7 CPU(s):     42-47,90-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

pointer sanitization
 Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected
 Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1.5M	8	Data	1
L1i	32K	1.5M	8	Instruction	1
L2	512K	24M	8	Unified	2
L3	32M	256M	16	Unified	3

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
 node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
 node 0 size: 64386 MB
 node 0 free: 63998 MB
 node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
 node 1 size: 64508 MB
 node 1 free: 64130 MB
 node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
 node 2 size: 64508 MB
 node 2 free: 64187 MB
 node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
 node 3 size: 64496 MB
 node 3 free: 64166 MB
 node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
 node 4 size: 64508 MB
 node 4 free: 64177 MB
 node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```

node 5 size: 64508 MB
node 5 free: 64080 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 64508 MB
node 6 free: 64174 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 64478 MB
node 7 free: 64173 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 12 12 12 32 32 32 32
 1:  12 10 12 12 32 32 32 32
 2:  12 12 10 12 32 32 32 32
 3:  12 12 12 10 32 32 32 32
 4:  32 32 32 32 10 12 12 12
 5:  32 32 32 32 12 10 12 12
 6:  32 32 32 32 12 12 10 12
 7:  32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      528285320 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

```

/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS

```

From /etc/*release* /etc/*version*

```

debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

```

uname -a:

```

Linux ubuntu5 5.4.0-113-generic #127-Ubuntu SMP Wed May 18 14:30:56 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 May 26 07:20

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	18G	169G	10%	/

```

From /sys/devices/virtual/dmi/id
Vendor:          Altos
Product:         BrainSphere W2050h-W275h F5
Product Family: Server
Serial:          DG9P89A21A0012

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

```

```

BIOS:
  BIOS Vendor:    GIGABYTE
  BIOS Version:   M09
  BIOS Date:      11/23/2021
  BIOS Revision:  5.22

```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====
```

```
=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====
```

```
=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Date: May-2022

Test Sponsor: Altos Computing Inc.

Hardware Availability: Apr-2021

Tested by: Altos Computing Inc.

Software Availability: May-2022

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

```
=====  
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)  
                  | 554.roms_r(base, peak)
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

```
=====  
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

```

C++ benchmarks:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Date: May-2022

Test Sponsor: Altos Computing Inc.

Hardware Availability: Apr-2021

Tested by: Altos Computing Inc.

Software Availability: May-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

519.lbm_r (continued):

```
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

554.roms_r (continued):

```
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Kieee -Mrecursive
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revF.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_fp_base = 401

BrainSphere W2050h-W275h F5 (AMD EPYC 7413)

SPECrate®2017_fp_peak = 424

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: May-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-26 07:35:45-0400.

Report generated on 2022-06-21 17:31:17 by CPU2017 PDF formatter v6442.

Originally published on 2022-06-21.