



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

SPECSpeed®2017_int_base = 13.5

SPECSpeed®2017_int_peak = 13.7

CPU2017 License: 001176


Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Intel Supermicro

Software Availability: Sep-2022

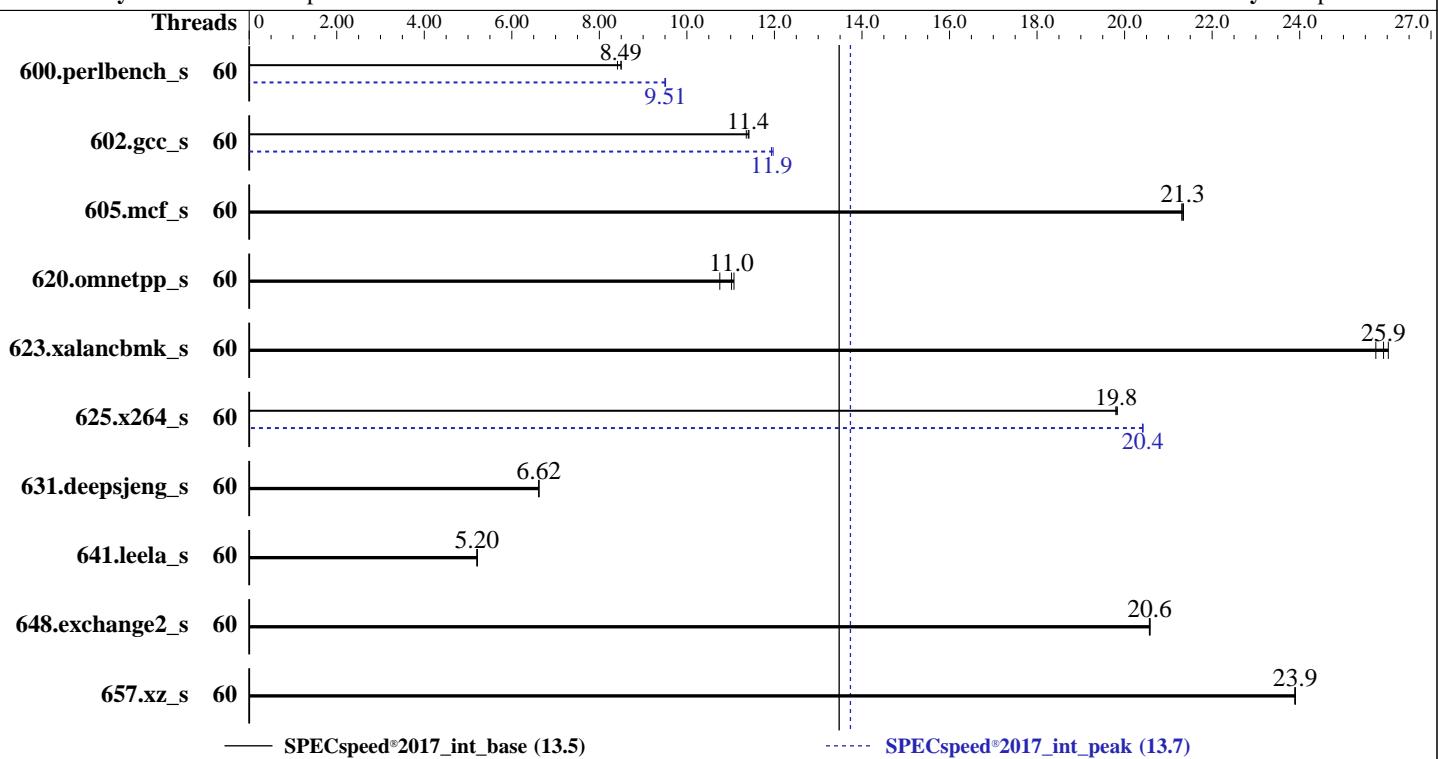

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 60 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 512 GB
(8 x 64 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 600 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
5.14.21-150400.22-default
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 1.0c released Jan-2023 tested as Nov-2022
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Intel Supermicro

Software Availability: Sep-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	60	209	8.49	209	8.50	211	8.41	60	187	9.50	187	9.51	187	9.51		
602.gcc_s	60	349	11.4	351	11.4	349	11.4	60	334	11.9	333	12.0	334	11.9		
605.mcf_s	60	221	21.3	222	21.3	221	21.3	60	221	21.3	222	21.3	221	21.3		
620.omnetpp_s	60	148	11.0	147	11.1	152	10.8	60	148	11.0	147	11.1	152	10.8		
623.xalancbmk_s	60	54.7	25.9	55.1	25.7	54.4	26.0	60	54.7	25.9	55.1	25.7	54.4	26.0		
625.x264_s	60	89.1	19.8	88.9	19.8	89.1	19.8	60	86.4	20.4	86.4	20.4	86.4	20.4		
631.deepsjeng_s	60	216	6.62	217	6.61	216	6.62	60	216	6.62	217	6.61	216	6.62		
641.leela_s	60	328	5.20	327	5.21	328	5.20	60	328	5.20	327	5.21	328	5.20		
648.exchange2_s	60	143	20.6	143	20.6	143	20.6	60	143	20.6	143	20.6	143	20.6		
657.xz_s	60	259	23.9	259	23.9	259	23.9	60	259	23.9	259	23.9	259	23.9		
SPECspeed®2017_int_base = 13.5								SPECspeed®2017_int_peak = 13.7								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/cpu22017-1.1.8/lib/intel64:/root/cpu22017-1.1.8/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Intel Supermicro

Software Availability: Sep-2022

General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC = Enable SNC4 (4-Clusters)
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
DCU Streamer Prefetcher = Disable
Hyper-Threading [ALL] = Disable

Sysinfo program /root/cpu2017-1.1.8/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on 139-164 Sun Dec 4 03:20:04 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H
1 "physical id"s (chips)
60 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 60
siblings : 60
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 60
On-line CPU(s) list: 0-59
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8490H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 60
Socket(s): 1

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Intel Supermicro

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Sep-2022

Platform Notes (Continued)

```

Stepping: 6
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf_lmbus tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsaved xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
      hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pkru ospke waitpkg avx512_vbmi2
      gfn_i vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
      pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 2.8 MiB (60 instances)
L1i cache: 1.9 MiB (60 instances)
L2 cache: 120 MiB (60 instances)
L3 cache: 112.5 MiB (1 instance)
NUMA node(s): 4
NUMA node0 CPU(s): 0-14
NUMA node1 CPU(s): 15-29
NUMA node2 CPU(s): 30-44
NUMA node3 CPU(s): 45-59
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
      filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    2.8M   12 Data        1       64      1          64
  L1i     32K    1.9M    8 Instruction  1       64      1          64
  L2      2M     120M   16 Unified      2      2048      1          64
  L3    112.5M  112.5M   15 Unified     3     122880      1          64

```

```
/proc/cpuinfo cache data
cache size : 115200 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
node 0 size: 128627 MB
node 0 free: 124298 MB
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Intel Supermicro

Software Availability: Sep-2022

Platform Notes (Continued)

```
node 1 size: 129020 MB
node 1 free: 125936 MB
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44
node 2 size: 129020 MB
node 2 free: 126022 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59
node 3 size: 128991 MB
node 3 free: 125267 MB
node distances:
node   0   1   2   3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10

From /proc/meminfo
MemTotal:      528034504 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
Linux 139-164 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC
2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                              Bypass disabled via prctl and
                                              seccomp

CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swaps
                                              barriers and __user pointer
                                              sanitization

CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB:
                                              conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):  Not affected

run-level 3 Dec 3 21:04

SPEC is set to: /root/cpu2017-1.1.8
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        btrfs  559G  170G  389G  31% /root
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Intel Supermicro

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Sep-2022

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: SMC X13
Serial: 0123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800
```

BIOS:

```
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.0c
BIOS Date: 11/30/2022
BIOS Revision: 5.29
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
   | 657.xz_s(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

```
=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
    | 641.leela_s(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 648.exchange2_s(base, peak)
```

```
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Intel Supermicro

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Sep-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -festo
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -festo
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -festo
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Intel Supermicro

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Sep-2022

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-211E-FRDN2T
(X13SEM-TF , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Intel Supermicro

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = 13.7

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Sep-2022

Peak Optimization Flags (Continued)

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-04 06:20:03-0500.

Report generated on 2024-01-29 17:17:49 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-16.