



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

CPU2017 License: 001176


Test Date: Nov-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

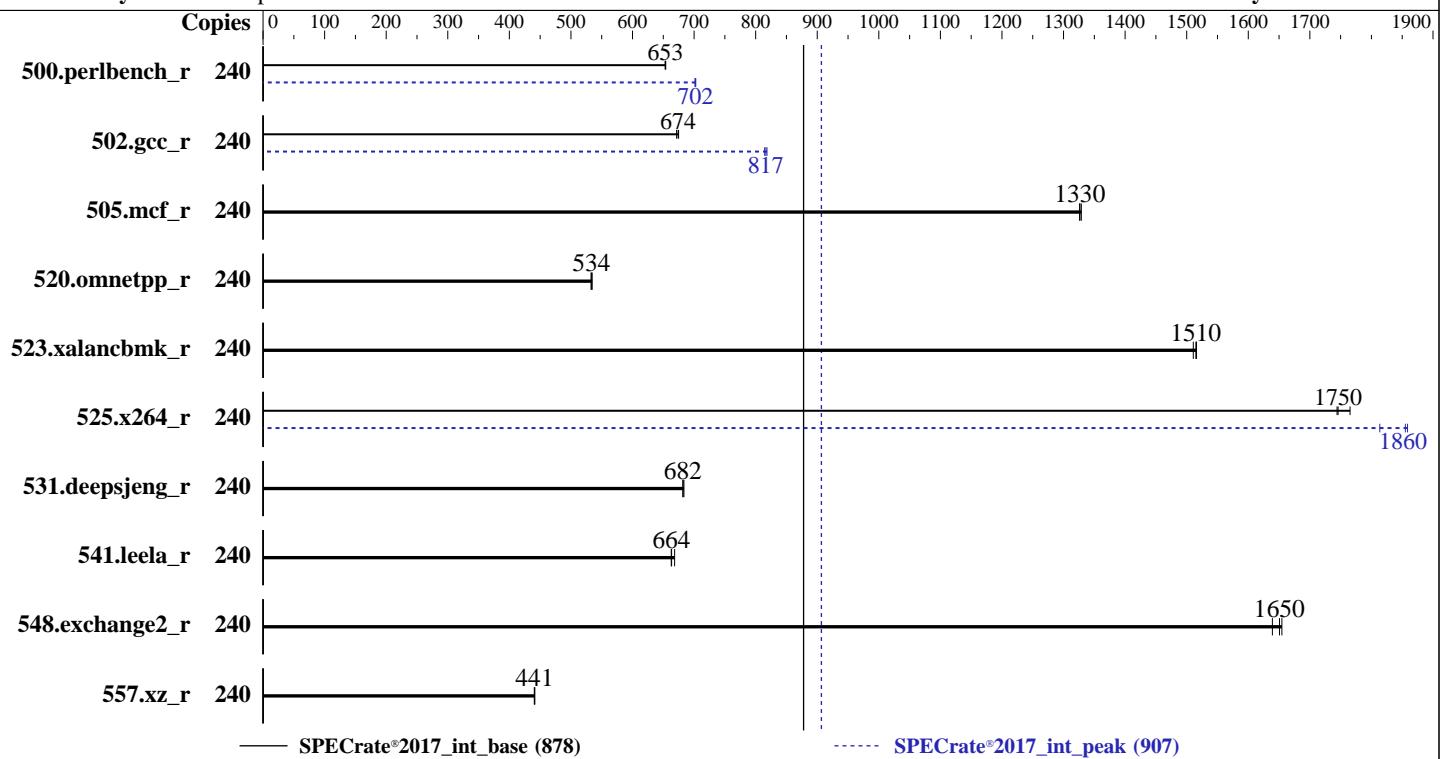

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 120 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1.92 TB NVMe SSD
Other: None

Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP4
Compiler: 5.14.21-150400.22-default
C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.0b released Dec-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

CPU2017 License: 001176

Test Date: Nov-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	585	653	585	653	584	654	240	544	702	545	701	544	703		
502.gcc_r	240	504	675	506	672	504	674	240	417	815	415	818	416	817		
505.mcf_r	240	292	1330	292	1330	292	1330	240	292	1330	292	1330	292	1330		
520.omnetpp_r	240	590	534	591	533	589	534	240	590	534	591	533	589	534		
523.xalancbmk_r	240	168	1510	167	1520	167	1510	240	168	1510	167	1520	167	1510		
525.x264_r	240	241	1750	238	1770	241	1740	240	232	1810	226	1860	227	1860		
531.deepsjeng_r	240	403	682	403	682	402	684	240	403	682	403	682	402	684		
541.leela_r	240	600	663	595	668	599	664	240	600	663	595	668	599	664		
548.exchange2_r	240	384	1640	380	1650	381	1650	240	384	1640	380	1650	381	1650		
557.xz_r	240	588	440	588	441	588	441	240	588	440	588	441	588	441		

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

CPU2017 License: 001176

Test Date: Nov-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Hyper-Threading [ALL] = Enable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Performance

DCU Streamer Prefetcher = Disable

KTI Prefetch = Enable

SNC = Enable SNC4 (4-clusters)

LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on 165-76 Tue Nov 29 19:22:55 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8490H
2 "physical id"s (chips)
240 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 60
siblings : 120
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59

From lscpu from util-linux 2.37.2:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

CPU2017 License: 001176

Test Date: Nov-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Platform Notes (Continued)

CPU(s):	240
On-line CPU(s) list:	0-239
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	60
Socket(s):	2
Stepping:	6
Frequency boost:	enabled
CPU max MHz:	1901.0000
CPU min MHz:	800.0000
BogoMIPS:	3800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xttopology nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbe fma cx16 xptr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pk uospke waitpkg avx512_vbmi2 gfn1 vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
Virtualization:	VT-x
L1d cache:	5.6 MiB (120 instances)
L1i cache:	3.8 MiB (120 instances)
L2 cache:	240 MiB (120 instances)
L3 cache:	225 MiB (2 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-14,120-134
NUMA node1 CPU(s):	15-29,135-149
NUMA node2 CPU(s):	30-44,150-164
NUMA node3 CPU(s):	45-59,165-179
NUMA node4 CPU(s):	60-74,180-194
NUMA node5 CPU(s):	75-89,195-209
NUMA node6 CPU(s):	90-104,210-224
NUMA node7 CPU(s):	105-119,225-239
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

CPU2017 License: 001176

Test Date: Nov-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Platform Notes (Continued)

L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data
cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
130 131 132 133 134
node 0 size: 128582 MB
node 0 free: 126068 MB
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
142 143 144 145 146 147 148 149
node 1 size: 129016 MB
node 1 free: 128654 MB
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
157 158 159 160 161 162 163 164
node 2 size: 129016 MB
node 2 free: 128541 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
172 173 174 175 176 177 178 179
node 3 size: 129016 MB
node 3 free: 128631 MB
node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
187 188 189 190 191 192 193 194
node 4 size: 129016 MB
node 4 free: 128662 MB
node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201
202 203 204 205 206 207 208 209
node 5 size: 129016 MB
node 5 free: 128677 MB
node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215
216 217 218 219 220 221 222 223 224
node 6 size: 128981 MB
node 6 free: 128649 MB
node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227
228 229 230 231 232 233 234 235 236 237 238 239
node 7 size: 128649 MB
node 7 free: 128315 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 21 21 21 21
1: 12 10 12 12 21 21 21 21
2: 12 12 10 12 21 21 21 21
3: 12 12 12 10 21 21 21 21
4: 21 21 21 21 10 12 12 12
5: 21 21 21 21 12 10 12 12
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10

From /proc/meminfo
MemTotal: 1056046588 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
ondemand

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

Test Date: Nov-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLE_HPC"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise High Performance Computing 15 SP4"
  ID="sle_hpc"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sle_hpc:15:sp4"
```

```
uname -a:
Linux 165-76 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC
2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Nov 29 19:19

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   738G  139G  600G  19%  /home
```

```
From /sys/devices/virtual/dmi/id
  Vendor:          Supermicro
  Product:         Super Server
  Product Family: Family
  Serial:          0123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
11x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
5x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800

BIOS:
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.0b
BIOS Date: 11/30/2022
BIOS Revision: 5.29

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

Test Date: Nov-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

Test Date: Nov-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

Test Date: Nov-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 878

SPECrate®2017_int_peak = 907

Test Date: Nov-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2023-01-10.html
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2023-01-10.xml
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-29 22:22:55-0500.

Report generated on 2024-01-29 17:17:06 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-13.