



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

Test Sponsor: xFusion

Tested by: xFusion

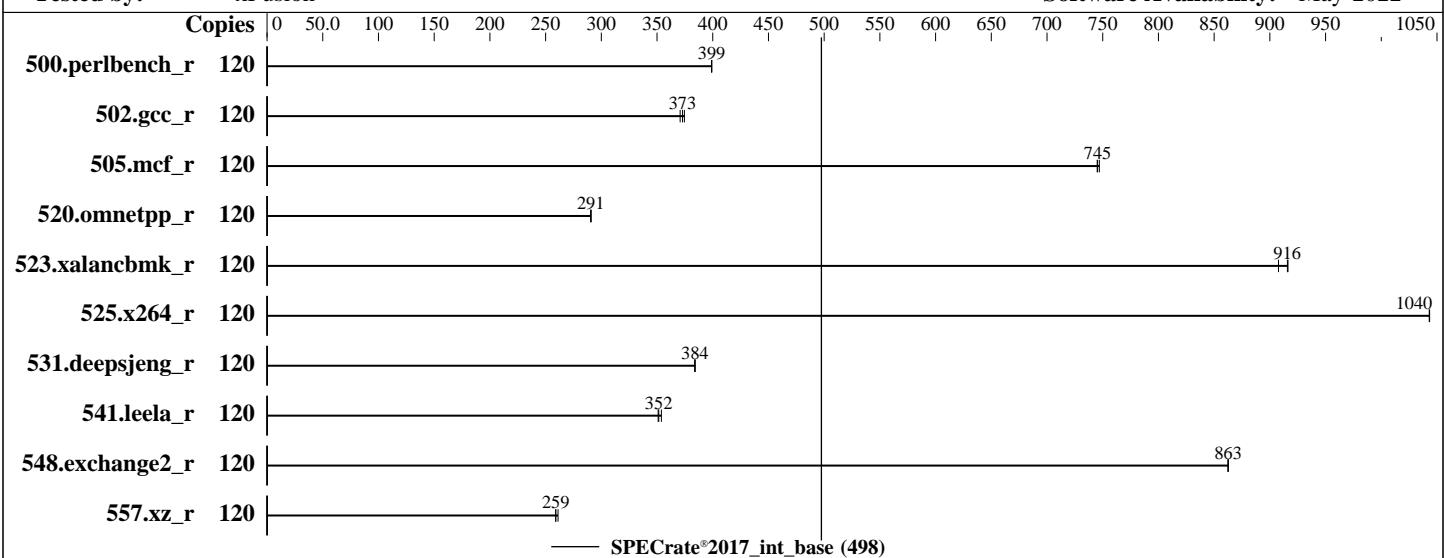

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 60 cores, 1 chip, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

OS:

Red Hat Enterprise Linux release 9.0 (Plow)

5.14.0-70.13.1.el9_0.x86_64

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

Compiler:

No

Version 2.00.35 Released Nov-2022

xfs

Firmware:

Run level 3 (multi-user)

File System:

64-bit

System State:

Not Applicable

Base Pointers:

None

Peak Pointers:

None

Other:

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

Software



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-----------------|--------|------------|------------|------------|------------|------------|-------------|--------|---------|-------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 120 | 479 | 399 | 479 | 399 | 479 | 399 | | | | | | | | | |
| 502.gcc_r | 120 | 458 | 371 | 456 | 373 | 454 | 375 | | | | | | | | | |
| 505.mcf_r | 120 | 260 | 745 | 260 | 747 | 260 | 745 | | | | | | | | | |
| 520.omnetpp_r | 120 | 542 | 291 | 542 | 291 | 541 | 291 | | | | | | | | | |
| 523.xalancbmk_r | 120 | 138 | 916 | 138 | 916 | 140 | 908 | | | | | | | | | |
| 525.x264_r | 120 | 201 | 1040 | 201 | 1040 | 201 | 1040 | | | | | | | | | |
| 531.deepsjeng_r | 120 | 358 | 384 | 358 | 384 | 358 | 384 | | | | | | | | | |
| 541.leela_r | 120 | 566 | 351 | 562 | 354 | 565 | 352 | | | | | | | | | |
| 548.exchange2_r | 120 | 365 | 862 | 364 | 863 | 364 | 863 | | | | | | | | | |
| 557.xz_r | 120 | 496 | 261 | 500 | 259 | 500 | 259 | | | | | | | | | |

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/lib/ia32:/spec2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Mon Dec 5 05:50:28 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H
1 "physical id"s (chips)
120 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 60
siblings : 120
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59

From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 120
On-line CPU(s) list: 0-119
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8490H
BIOS Model name: Intel(R) Xeon(R) Platinum 8490H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 60
Socket(s): 1
Stepping: 6
BogoMIPS: 3800.00

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

Flags:
 fpu vme de pse tsc msr pae mce cx8 apic sep mttr
 pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
 pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xttopology
 nonstop_tsc cpuid aperfmpfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est
 tm2 ssse3 sdbg fma cx16 xtr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
 tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
 epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
 ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni
 avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vmbi umip pkru ospke waitpkg
 avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocndq
 la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
 tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
 L1d cache: 2.8 MiB (60 instances)
 L1i cache: 1.9 MiB (60 instances)
 L2 cache: 120 MiB (60 instances)
 L3 cache: 112.5 MiB (1 instance)
 NUMA node(s): 4
 NUMA node0 CPU(s): 0-14,60-74
 NUMA node1 CPU(s): 15-29,75-89
 NUMA node2 CPU(s): 30-44,90-104
 NUMA node3 CPU(s): 45-59,105-119
 Vulnerability Itlb multihit: Not affected
 Vulnerability Llft: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d | 48K | 2.8M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 1.9M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 120M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 112.5M | 112.5M | 15 | Unified | 3 | 122880 | 1 | 64 |

/proc/cpuinfo cache data
 cache size : 115200 KB

From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
 available: 4 nodes (0-3)
 node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 60 61 62 63 64 65 66 67 68 69 70 71 72
 73 74
 node 0 size: 63567 MB
 node 0 free: 62523 MB
 node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 75 76 77 78 79 80 81 82 83 84
 85 86 87 88 89
 node 1 size: 64505 MB
 node 1 free: 63571 MB
 node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 90 91 92 93 94 95 96 97 98 99

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

Platform Notes (Continued)

```
100 101 102 103 104
node 2 size: 64505 MB
node 2 free: 63488 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 105 106 107 108 109 110 111
112 113 114 115 116 117 118 119
node 3 size: 64458 MB
node 3 free: 63294 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10

From /proc/meminfo
MemTotal:      263205964 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="9.0 (Plow)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="9.0"
  PLATFORM_ID="platform:el9"
  PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                                Bypass disabled via prctl
                                                Mitigation: usercopy/swaps
                                                barriers and __user pointer
                                                sanitization
CVE-2017-5753 (Spectre variant 1):        Mitigation: Enhanced IBRS, IBPB:
                                                conditional, RSB filling
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB:
                                                conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):  Not affected

run-level 3 Dec 4 22:50

SPEC is set to: /spec2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda3    xfs   420G   46G  375G  11%  /
```

From /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

Vendor: XFUSION
Product: 2288H V7
Product Family: Eagle Stream
Serial: 2106182101X3N8000005

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

BIOS:
BIOS Vendor: XFUSION
BIOS Version: 2.00.35
BIOS Date: 11/30/2022
BIOS Revision: 0.35

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 498

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-05 05:50:27-0500.

Report generated on 2024-01-29 17:15:52 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-10.