



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

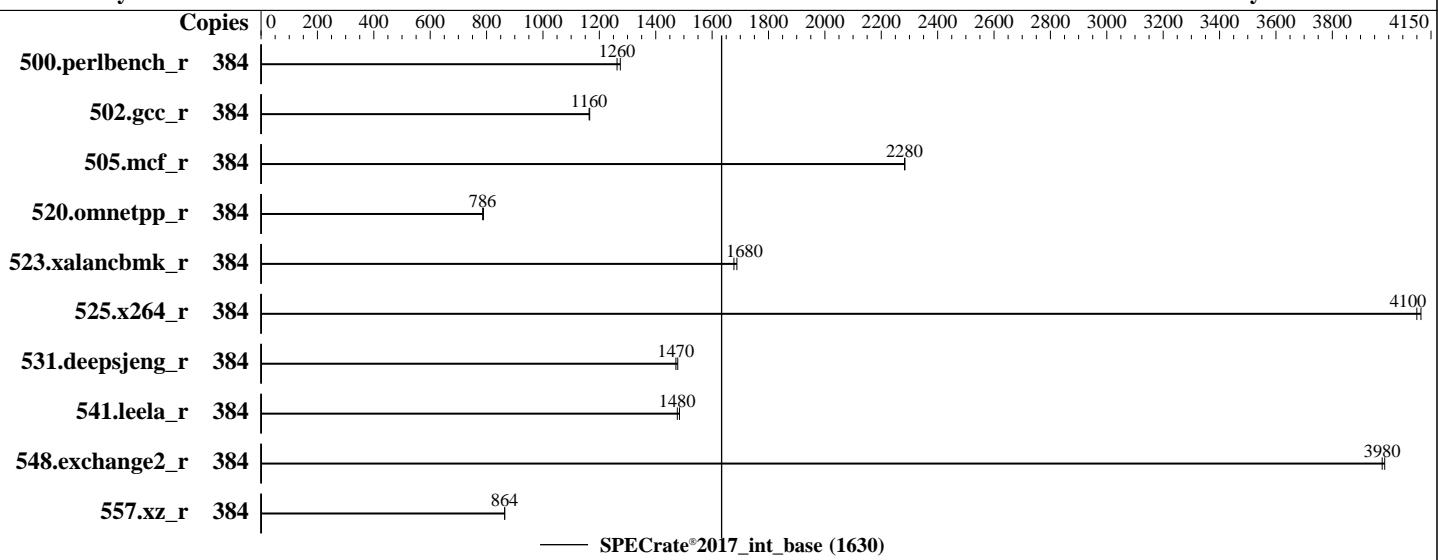

Hardware

CPU Name: AMD EPYC 9654
Max MHz: 3700
Nominal: 2400
Enabled: 192 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 180 GB on tmpfs
Other: None

Software

OS: Ubuntu 22.04.1 LTS
Compiler: 5.15.0-46-generic
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
Firmware: No
File System: tmpfs
System State: Version 1.1.0 released Nov-2022
Base Pointers: Run level 3 (multi-user)
Peak Pointers: 64-bit
Other: Not Applicable
Power Management: None
BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	480	1270	484	1260											
502.gcc_r	384	466	1170	467	1160											
505.mcf_r	384	272	2280	272	2280											
520.omnetpp_r	384	641	786	639	789											
523.xalancbmk_r	384	240	1690	242	1680											
525.x264_r	384	163	4110	164	4100											
531.deepsjeng_r	384	299	1470	298	1480											
541.leela_r	384	431	1480	428	1480											
548.exchange2_r	384	252	3990	253	3980											
557.xz_r	384	480	864	480	864											

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_rate_aocc400_genoa_B_lib/lib
     :/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_rate_aocc400_genoa_B_lib/lib
      32 :"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 180 GB ramdisk created with the cmd: "mount -t tmpfs -o size=180G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
        NUMA Nodes per Socket : 4
    L3 Cache as NUMA Domain : Enabled

    System Profile : Custom
    Memory Patrol Scrub : Disabled
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

PCI ASPM L1 Link

Power Management : Disabled

Determinism Slider : Power Determinism

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on genoa-sut Tue Dec 13 23:08:32 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9654 96-Core Processor
  2 "physical id"s (chips)
  384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 96
  siblings : 192
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
  81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
  81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	384
On-line CPU(s) list:	0-383
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9654 96-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	2
Core(s) per socket:	96
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3709.0000
CPU min MHz:	400.0000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

BogoMIPS:

4801.46

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occip_llc cq_m_bbm_total
cq_m_bbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pkru
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_lld

Virtualization:

AMD-V

L1d cache:

6 MiB (192 instances)

L1i cache:

6 MiB (192 instances)

L2 cache:

192 MiB (192 instances)

L3 cache:

768 MiB (24 instances)

NUMA node(s):

24

NUMA node0 CPU(s):

0-7,192-199

NUMA node1 CPU(s):

32-39,224-231

NUMA node2 CPU(s):

64-71,256-263

NUMA node3 CPU(s):

16-23,208-215

NUMA node4 CPU(s):

48-55,240-247

NUMA node5 CPU(s):

80-87,272-279

NUMA node6 CPU(s):

24-31,216-223

NUMA node7 CPU(s):

56-63,248-255

NUMA node8 CPU(s):

88-95,280-287

NUMA node9 CPU(s):

8-15,200-207

NUMA node10 CPU(s):

40-47,232-239

NUMA node11 CPU(s):

72-79,264-271

NUMA node12 CPU(s):

96-103,288-295

NUMA node13 CPU(s):

128-135,320-327

NUMA node14 CPU(s):

160-167,352-359

NUMA node15 CPU(s):

112-119,304-311

NUMA node16 CPU(s):

144-151,336-343

NUMA node17 CPU(s):

176-183,368-375

NUMA node18 CPU(s):

120-127,312-319

NUMA node19 CPU(s):

152-159,344-351

NUMA node20 CPU(s):

184-191,376-383

NUMA node21 CPU(s):

104-111,296-303

NUMA node22 CPU(s):

136-143,328-335

NUMA node23 CPU(s):

168-175,360-367

Vulnerability Itlb multihit:

Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 24 nodes (0-23)
node 0 cpus: 0 1 2 3 4 5 6 7 192 193 194 195 196 197 198 199
node 0 size: 64054 MB
node 0 free: 63556 MB
node 1 cpus: 32 33 34 35 36 37 38 39 224 225 226 227 228 229 230 231
node 1 size: 64508 MB
node 1 free: 64209 MB
node 2 cpus: 64 65 66 67 68 69 70 71 256 257 258 259 260 261 262 263
node 2 size: 64506 MB
node 2 free: 64195 MB
node 3 cpus: 16 17 18 19 20 21 22 23 208 209 210 211 212 213 214 215
node 3 size: 64508 MB
node 3 free: 64261 MB
node 4 cpus: 48 49 50 51 52 53 54 55 240 241 242 243 244 245 246 247
node 4 size: 64508 MB
node 4 free: 64256 MB
node 5 cpus: 80 81 82 83 84 85 86 87 272 273 274 275 276 277 278 279
node 5 size: 64506 MB
node 5 free: 64247 MB
node 6 cpus: 24 25 26 27 28 29 30 31 216 217 218 219 220 221 222 223
node 6 size: 64508 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 6 free: 64263 MB
node 7 cpus: 56 57 58 59 60 61 62 63 248 249 250 251 252 253 254 255
node 7 size: 64508 MB
node 7 free: 64263 MB
node 8 cpus: 88 89 90 91 92 93 94 95 280 281 282 283 284 285 286 287
node 8 size: 64506 MB
node 8 free: 64239 MB
node 9 cpus: 8 9 10 11 12 13 14 15 200 201 202 203 204 205 206 207
node 9 size: 64508 MB
node 9 free: 64257 MB
node 10 cpus: 40 41 42 43 44 45 46 47 232 233 234 235 236 237 238 239
node 10 size: 64508 MB
node 10 free: 64287 MB
node 11 cpus: 72 73 74 75 76 77 78 79 264 265 266 267 268 269 270 271
node 11 size: 64490 MB
node 11 free: 64252 MB
node 12 cpus: 96 97 98 99 100 101 102 103 288 289 290 291 292 293 294 295
node 12 size: 64508 MB
node 12 free: 60694 MB
node 13 cpus: 128 129 130 131 132 133 134 135 320 321 322 323 324 325 326 327
node 13 size: 64508 MB
node 13 free: 64166 MB
node 14 cpus: 160 161 162 163 164 165 166 167 352 353 354 355 356 357 358 359
node 14 size: 64506 MB
node 14 free: 64153 MB
node 15 cpus: 112 113 114 115 116 117 118 119 304 305 306 307 308 309 310 311
node 15 size: 64508 MB
node 15 free: 64116 MB
node 16 cpus: 144 145 146 147 148 149 150 151 336 337 338 339 340 341 342 343
node 16 size: 64508 MB
node 16 free: 64205 MB
node 17 cpus: 176 177 178 179 180 181 182 183 368 369 370 371 372 373 374 375
node 17 size: 64506 MB
node 17 free: 64216 MB
node 18 cpus: 120 121 122 123 124 125 126 127 312 313 314 315 316 317 318 319
node 18 size: 64508 MB
node 18 free: 64266 MB
node 19 cpus: 152 153 154 155 156 157 158 159 344 345 346 347 348 349 350 351
node 19 size: 64472 MB
node 19 free: 64254 MB
node 20 cpus: 184 185 186 187 188 189 190 191 376 377 378 379 380 381 382 383
node 20 size: 64506 MB
node 20 free: 64266 MB
node 21 cpus: 104 105 106 107 108 109 110 111 296 297 298 299 300 301 302 303
node 21 size: 64508 MB
node 21 free: 64262 MB
node 22 cpus: 136 137 138 139 140 141 142 143 328 329 330 331 332 333 334 335
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 22 size: 64508 MB
node 22 free: 64262 MB
node 23 cpus: 168 169 170 171 172 173 174 175 360 361 362 363 364 365 366 367
node 23 size: 64476 MB
node 23 free: 64204 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15  16  17  18  19
20  21  22  23
  0: 10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  1: 11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  2: 11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  3: 12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  4: 12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  5: 12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  6: 12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  7: 12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  8: 12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  9: 12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
 10: 12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32
 32  32  32  32
 11: 12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32
 32  32  32  32
 12: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12
 12  12  12
 13: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12
 12  12  12
 14: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12
 12  12  12
 15: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11
 11  12  12
 12  12  12  12
 16: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10
 11  12  12
 12  12  12  12
 17: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11
 11  10  12  12
 12  12  12  12
 18: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12
 12  12  10  11
 11  12  12  12
 19: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12
 12  11  10
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```
11 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11 11
10 12 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12
12 10 11 11
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12
12 11 10 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12
12 11 11 10
```

From /proc/meminfo

```
MemTotal: 1584789228 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active
Current active profile: latency-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS

From /etc/*release* /etc/*version*

```
debian_version: bookworm/sid
os-release:
PRETTY_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION_CODENAME=jammy
ID=ubuntu
ID_LIKE=debian
HOME_URL="https://www.ubuntu.com/"
```

uname -a:

```
Linux genoa-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

retbleed:

CVE-2018-3639 (Speculative Store Bypass):

Not affected

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Dec 13 23:05

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	180G	3.4G	177G	2%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge R6625
Product Family:	PowerEdge
Serial:	BGP4016

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

BIOS:

BIOS Vendor:	Dell Inc.
BIOS Version:	1.1.0
BIOS Date:	11/25/2022
BIOS Revision:	1.1

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

Fortran | 548.exchange2_r(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc
```

C++ benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang  
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9654 96-Core Processor)

SPECrate®2017_int_base = 1630

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-13 18:08:31-0500.

Report generated on 2023-02-01 18:17:42 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.