



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

**SPECrate®2017\_int\_base = 731**

**SPECrate®2017\_int\_peak = 746**

CPU2017 License: 3


**Test Date:** Jan-2023

**Test Sponsor:** HPE

**Hardware Availability:** Dec-2022

**Tested by:** HPE

**Software Availability:** Nov-2022

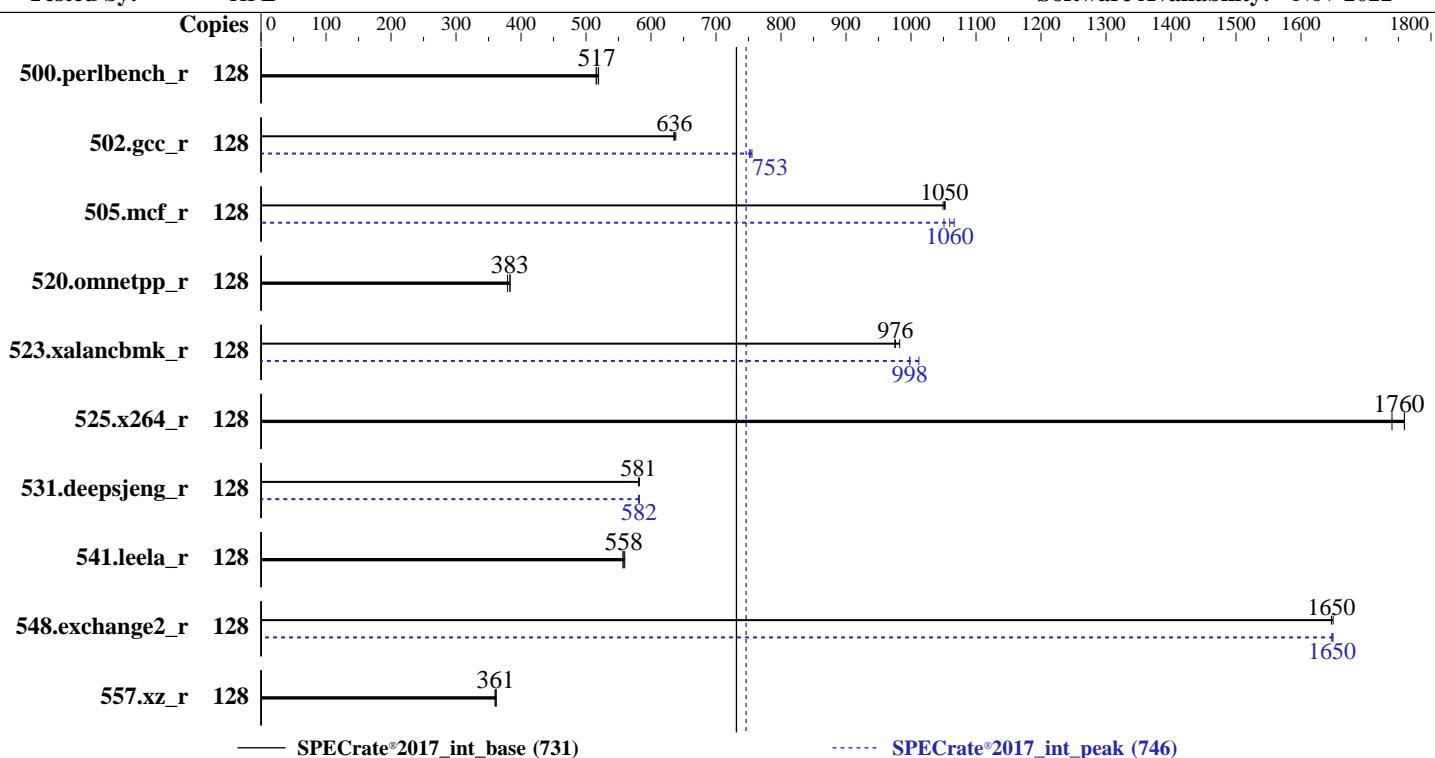

## Hardware

CPU Name: AMD EPYC 9354  
 Max MHz: 3800  
 Nominal: 3250  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 22.04.1 LTS  
 Compiler: Kernel 5.15.0-50-generic  
 C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version v1.12 11/24/2022 released Nov-2022  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

**SPECrate®2017\_int\_base = 731**

**SPECrate®2017\_int\_peak = 746**

CPU2017 License: 3

Test Date: Jan-2023

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>395</b>	<b>517</b>	392	519	395	515	128	<b>395</b>	<b>517</b>	392	519	395	515	395	515
502.gcc_r	128	<b>285</b>	<b>636</b>	285	635	284	638	128	241	752	240	755	241	753	241	753
505.mcf_r	128	197	1050	<b>197</b>	<b>1050</b>	197	1050	128	194	1070	<b>195</b>	<b>1060</b>	197	1050	197	1050
520.omnetpp_r	128	<b>439</b>	<b>383</b>	438	383	443	379	128	<b>439</b>	<b>383</b>	438	383	443	379	443	379
523.xalancbmk_r	128	<b>138</b>	<b>976</b>	139	975	138	983	128	134	1010	135	998	135	998	135	998
525.x264_r	128	<b>127</b>	<b>1760</b>	129	1740	127	1760	128	<b>127</b>	<b>1760</b>	129	1740	127	1760	127	1760
531.deepsjeng_r	128	<b>253</b>	<b>581</b>	252	582	253	581	128	<b>252</b>	<b>582</b>	252	582	253	581	253	581
541.leela_r	128	379	560	<b>380</b>	<b>558</b>	381	557	128	379	560	<b>380</b>	<b>558</b>	381	557	381	557
548.exchange2_r	128	204	1650	<b>204</b>	<b>1650</b>	203	1650	128	203	1650	204	1650	204	1650	<b>204</b>	<b>1650</b>
557.xz_r	128	384	360	382	362	<b>383</b>	<b>361</b>	128	384	360	382	362	<b>383</b>	<b>361</b>		

**SPECrate®2017\_int\_base = 731**

**SPECrate®2017\_int\_peak = 746**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

**SPECrate®2017\_int\_base = 731**

**SPECrate®2017\_int\_peak = 746**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/new_cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/new_cpu2017/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

The system ROM used for this result contains microcode version 0xa10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

```
Sysinfo program /home/new_cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on admin1 Tue Jun 28 15:00:27 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9354 32-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
```

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               128
On-line CPU(s) list: 0-127
Vendor ID:            AuthenticAMD
Model name:           AMD EPYC 9354 32-Core Processor
CPU family:           25
Model:                17
Thread(s) per core:  2
Core(s) per socket:  32
Socket(s):           2
Stepping:             1
Frequency boost:     enabled
CPU max MHz:         3800.0000
CPU min MHz:         400.0000
BogoMIPS:             6490.11
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
                      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

**SPECrate®2017\_int\_base = 731**

**SPECrate®2017\_int\_peak = 746**

CPU2017 License: 3

**Test Date:** Jan-2023

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

aperfmpfperf rapl pnpi pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization: AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0-3,64-67
NUMA node1 CPU(s): 16-19,80-83
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 24-27,88-91
NUMA node4 CPU(s): 12-15,76-79
NUMA node5 CPU(s): 28-31,92-95
NUMA node6 CPU(s): 4-7,68-71
NUMA node7 CPU(s): 20-23,84-87
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 48-51,112-115
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 56-59,120-123
NUMA node12 CPU(s): 44-47,108-111
NUMA node13 CPU(s): 60-63,124-127
NUMA node14 CPU(s): 36-39,100-103
NUMA node15 CPU(s): 52-55,116-119
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 96455 MB
node 0 free: 96173 MB
node 1 cpus: 16 17 18 19 80 81 82 83
node 1 size: 96765 MB
node 1 free: 96588 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 96765 MB
node 2 free: 96549 MB
node 3 cpus: 24 25 26 27 88 89 90 91
node 3 size: 96765 MB
node 3 free: 96598 MB
node 4 cpus: 12 13 14 15 76 77 78 79
node 4 size: 96765 MB
node 4 free: 96575 MB
node 5 cpus: 28 29 30 31 92 93 94 95
node 5 size: 96765 MB
node 5 free: 96578 MB
node 6 cpus: 4 5 6 7 68 69 70 71
node 6 size: 96765 MB
node 6 free: 96589 MB
node 7 cpus: 20 21 22 23 84 85 86 87
node 7 size: 96730 MB
node 7 free: 96463 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 96765 MB
node 8 free: 96616 MB
node 9 cpus: 48 49 50 51 112 113 114 115
node 9 size: 96765 MB
node 9 free: 96617 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 96765 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Date: Jan-2023

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 10 free: 96623 MB
node 11 cpus: 56 57 58 59 120 121 122 123
node 11 size: 96765 MB
node 11 free: 96612 MB
node 12 cpus: 44 45 46 47 108 109 110 111
node 12 size: 96765 MB
node 12 free: 96614 MB
node 13 cpus: 60 61 62 63 124 125 126 127
node 13 size: 96765 MB
node 13 free: 96611 MB
node 14 cpus: 36 37 38 39 100 101 102 103
node 14 size: 96765 MB
node 14 free: 96623 MB
node 15 cpus: 52 53 54 55 116 117 118 119
node 15 size: 96716 MB
node 15 free: 96576 MB
node distances:
node   0    1    2    3    4    5    6    7    8    9    10   11   12   13   14   15
  0: 10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  1: 11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  2: 12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
  3: 12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
  4: 12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
  5: 12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
  6: 12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
  7: 12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
  8: 32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
  9: 32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
 10: 32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
 11: 32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
 12: 32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
 13: 32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
 14: 32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
 15: 32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10
```

From /proc/meminfo

```
MemTotal:      1585007836 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active
 Current active profile: balanced

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has
 performance

/usr/bin/lsb\_release -d

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

Ubuntu 22.04.1 LTS

```
From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
  PRETTY_NAME="Ubuntu 22.04.1 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04.1 LTS (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

uname -a:

```
Linux admin1 5.15.0-50-generic #56-Ubuntu SMP Tue Sep 20 13:23:26 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling, PBRSB-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jun 28 00:00

SPEC is set to: /home/new\_cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	62G	357G	15%	/

From /sys/devices/virtual/dmi/id

Vendor: HPE

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

Product: ProLiant DL365 Gen11

Product Family: ProLiant

Serial: DL365G11-001

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800

BIOS:

BIOS Vendor: HPE  
BIOS Version: 1.12  
BIOS Date: 11/24/2022  
BIOS Revision: 1.12  
Firmware Revision: 1.10

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C | 502.gcc\_r(peak)

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 523.xalancbmk\_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 523.xalancbmk\_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Base Portability Flags (Continued)

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdaloc
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

502.gcc\_r: -m32 -flto -z muldefs -Ofast -march=znver4

-fveclib=AMDLIB -ffast-math -fstruct-layout=7

-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.25 GHz, AMD EPYC 9354)

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

502.gcc\_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lamdalloc-ext
```

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(3.25 GHz, AMD EPYC 9354)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 746

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>  
<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>  
<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-28 05:30:26-0400.

Report generated on 2023-02-01 18:21:54 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.