



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

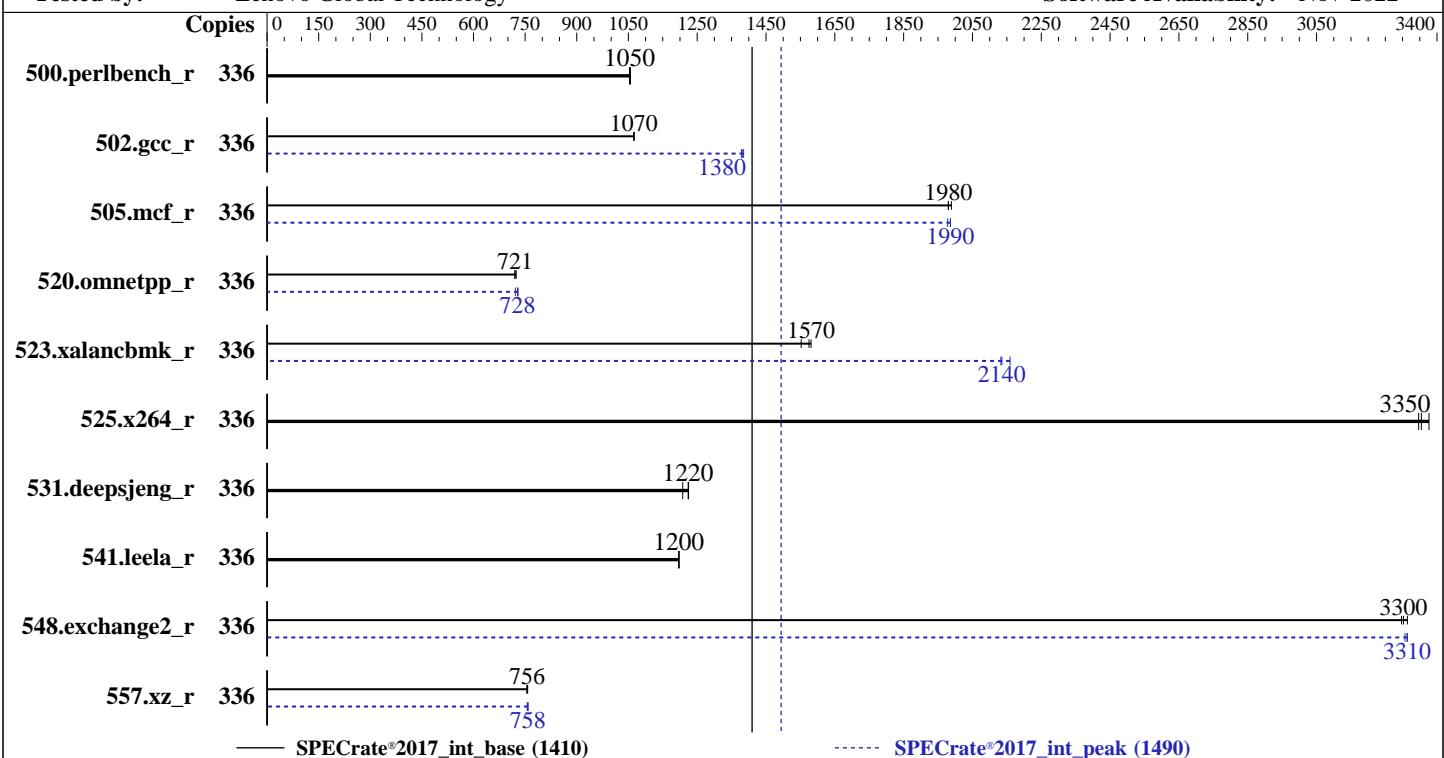

### Hardware

CPU Name: AMD EPYC 9634  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 168 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 7 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Compiler: Kernel 5.14.21-150400.22-default  
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC  
 Firmware: No  
 File System: Lenovo BIOS Version KAE105L 1.20 released Dec-2022  
 System State: xfs  
 Base Pointers: Run level 3 (multi-user)  
 Peak Pointers: 64-bit  
 Other: 32/64-bit  
 Power Management: None  
 BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrade®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	336	506	1060	<b>508</b>	<b>1050</b>	508	1050	336	506	1060	<b>508</b>	<b>1050</b>	508	1050	508	1050
502.gcc_r	336	446	1070	<b>446</b>	<b>1070</b>	446	1070	336	344	1380	<b>345</b>	<b>1380</b>	345	1380	345	1380
505.mcf_r	336	273	1990	<b>274</b>	<b>1980</b>	274	1980	336	<b>273</b>	<b>1990</b>	275	1980	273	1990	273	1990
520.omnetpp_r	336	<b>612</b>	<b>721</b>	612	720	609	724	336	604	729	611	722	<b>606</b>	<b>728</b>	606	728
523.xalancbmk_r	336	<b>225</b>	<b>1570</b>	224	1580	229	1550	336	164	2160	166	2130	<b>166</b>	<b>2140</b>	166	2140
525.x264_r	336	174	3380	<b>175</b>	<b>3350</b>	176	3350	336	174	3380	<b>175</b>	<b>3350</b>	176	3350	176	3350
531.deepsjeng_r	336	314	1230	<b>315</b>	<b>1220</b>	319	1210	336	314	1230	<b>315</b>	<b>1220</b>	319	1210	319	1210
541.leela_r	336	465	1200	465	1200	<b>465</b>	<b>1200</b>	336	465	1200	465	1200	<b>465</b>	<b>1200</b>	465	1200
548.exchange2_r	336	266	3310	267	3300	<b>267</b>	<b>3300</b>	336	<b>266</b>	<b>3310</b>	266	3310	266	3310	266	3310
557.xz_r	336	479	757	481	755	<b>480</b>	<b>756</b>	336	480	756	<b>479</b>	<b>758</b>	478	758	478	758

SPECrade®2017\_int\_base = 1410

SPECrade®2017\_int\_peak = 1490

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_rate_aocc400_genoa_B_lib/
     lib:/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_rate_aocc400_genoa_B_l
     ib/lib32:"
```

MALLOC\_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:  
MALLOC\_CONF = "thp:never"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost Sat Jan 14 19:18:28 2023
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9634 84-Core Processor
  2 "physical id"s (chips)
  336 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 84
  siblings : 168
  physical 0: cores 0 1 2 3 4 5 6 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28
  29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59 60
  61 62 64 65 66 67 68 69 70 72 73 74 75 76 77 78 80 81 82 83 84 85 86 88 89 90 91 92
  93 94
  physical 1: cores 0 1 2 3 4 5 6 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28
  29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59 60
  61 62 64 65 66 67 68 69 70 72 73 74 75 76 77 78 80 81 82 83 84 85 86 88 89 90 91 92
  93 94
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 336
On-line CPU(s) list: 0-335
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9634 84-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 84
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3700.1951
CPU min MHz: 1500.0000
BogoMIPS: 4493.21
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

**SPECrate®2017\_int\_base = 1410**

**SPECrate®2017\_int\_peak = 1490**

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

```

avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld

Virtualization: AMD-V
L1d cache: 5.3 MiB (168 instances)
L1i cache: 5.3 MiB (168 instances)
L2 cache: 168 MiB (168 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-20,168-188
NUMA node1 CPU(s): 21-41,189-209
NUMA node2 CPU(s): 42-62,210-230
NUMA node3 CPU(s): 63-83,231-251
NUMA node4 CPU(s): 84-104,252-272
NUMA node5 CPU(s): 105-125,273-293
NUMA node6 CPU(s): 126-146,294-314
NUMA node7 CPU(s): 147-167,315-335
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	5.3M	8	Data	1	64	1	64
L1i	32K	5.3M	8	Instruction	1	64	1	64
L2	1M	168M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 168 169 170 171 172

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188  
node 0 size: 193270 MB  
node 0 free: 191042 MB  
node 1 cpus: 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 189 190 191  
192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209  
node 1 size: 193485 MB  
node 1 free: 193041 MB  
node 2 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 210 211 212  
213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230  
node 2 size: 193519 MB  
node 2 free: 193087 MB  
node 3 cpus: 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 231 232 233  
234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251  
node 3 size: 193519 MB  
node 3 free: 193159 MB  
node 4 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 252  
253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272  
node 4 size: 193519 MB  
node 4 free: 192770 MB  
node 5 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122  
123 124 125 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291  
292 293  
node 5 size: 193519 MB  
node 5 free: 193025 MB  
node 6 cpus: 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143  
144 145 146 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312  
313 314  
node 6 size: 193519 MB  
node 6 free: 193045 MB  
node 7 cpus: 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164  
165 166 167 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333  
334 335  
node 7 size: 193317 MB  
node 7 free: 192923 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 12 12 12 32 32 32 32  
1: 12 10 12 12 32 32 32 32  
2: 12 12 10 12 32 32 32 32  
3: 12 12 12 10 32 32 32 32  
4: 32 32 32 32 10 12 12 12  
5: 32 32 32 32 12 10 12 12  
6: 32 32 32 32 12 12 10 12  
7: 32 32 32 32 12 12 12 10

From /proc/meminfo

MemTotal: 1584818060 kB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="SLES"  
VERSION="15-SP4"  
VERSION\_ID="15.4"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP4"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jan 14 19:16

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 446G 32G 415G 8% /

From /sys/devices/virtual/dmi/id  
Vendor: Lenovo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

Product: ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U

Product Family: ThinkSystem

Serial: 1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x SK Hynix HMCG94AEBRA102N 64 GB 2 rank 4800

2x SK Hynix HMCG94AEBRA109N 64 GB 2 rank 4800

BIOS:

BIOS Vendor: Lenovo  
BIOS Version: KAE105L-1.20  
BIOS Date: 12/29/2022  
BIOS Revision: 1.20  
Firmware Revision: 1.20

(End of data from sysinfo program)

### Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

C | 502.gcc\_r(peak)

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 523.xalancbmk\_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 523.xalancbmk\_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdaloc
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

502.gcc\_r: -m32 -flto -z muldefs -Ofast -march=znver4

-fveclib=AMDLIB -ffast-math -fstruct-layout=7

-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

502.gcc\_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017\_int\_base = 1410

SPECrate®2017\_int\_peak = 1490

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-P.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-P.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-14 06:18:27-0500.

Report generated on 2023-02-01 18:25:18 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.