



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

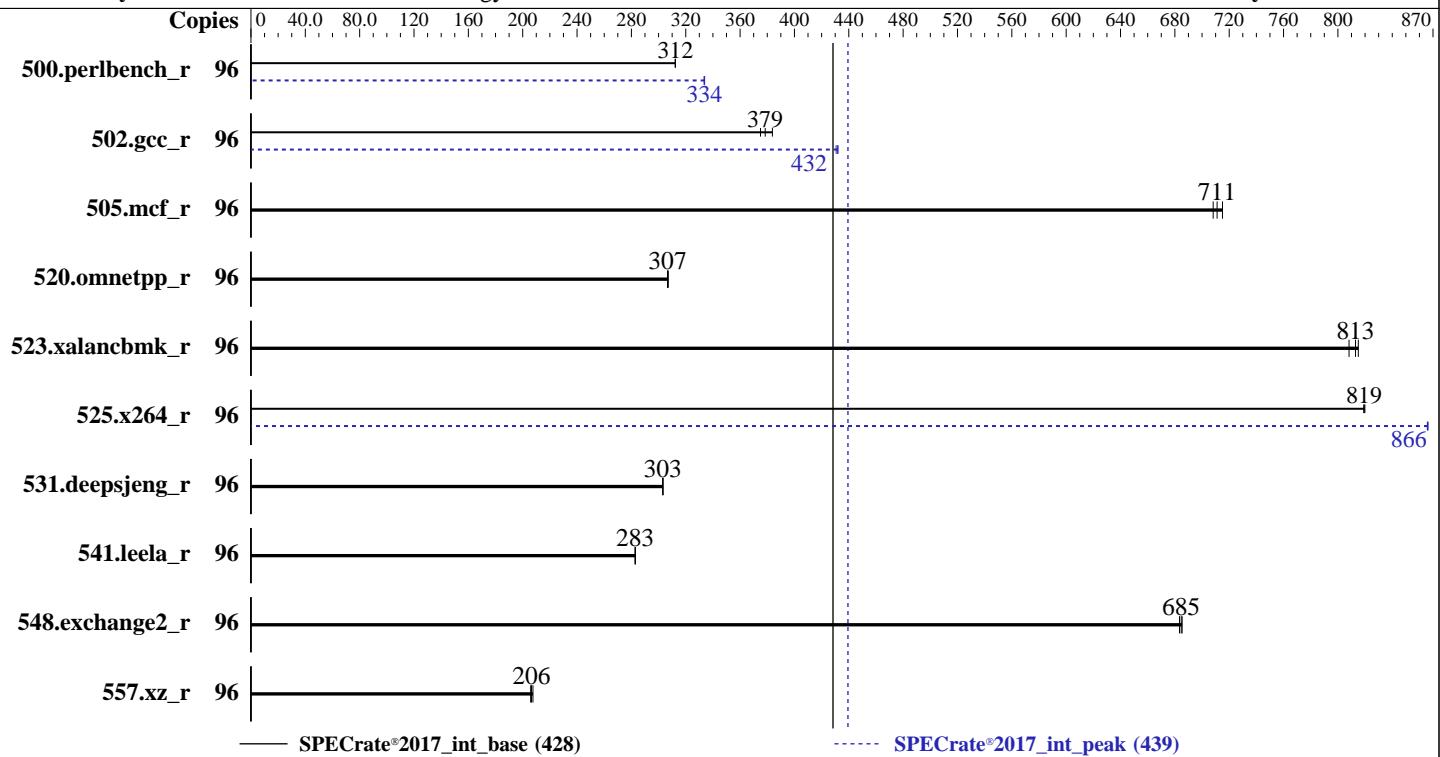

Hardware

CPU Name: Intel Xeon Gold 6418H
Max MHz: 4000
Nominal: 2100
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler
for Linux;
Parallel: No
Firmware: Lenovo BIOS Version ESE109L 1.10 released Jan-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECCrate®2017_int_base = 428

SPECCrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	489	312	489	312	489	312	96	458	334	458	334	458	333	458	333
502.gcc_r	96	362	375	359	379	354	384	96	316	431	315	432	315	432	315	432
505.mcf_r	96	217	715	218	711	219	708	96	217	715	218	711	219	708	219	708
520.omnetpp_r	96	411	307	410	307	411	307	96	411	307	410	307	411	307	411	307
523.xalancbmk_r	96	125	813	124	815	125	808	96	125	813	124	815	125	808	125	808
525.x264_r	96	205	819	205	820	205	819	96	194	866	194	866	194	866	194	866
531.deepsjeng_r	96	363	303	363	303	363	303	96	363	303	363	303	363	303	363	303
541.leela_r	96	562	283	562	283	562	283	96	562	283	562	283	562	283	562	283
548.exchange2_r	96	367	685	367	685	368	683	96	367	685	367	685	368	683	368	683
557.xz_r	96	500	208	502	206	504	206	96	500	208	502	206	504	206	504	206

SPECCrate®2017_int_base = 428

SPECCrate®2017_int_peak = 439

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =
 "/home/cpu2017-1.1.8-ic2022.1/lib/intel64:/home/cpu2017-1.1.8-ic2022.1/lib/ia32:/home/cpu2017-1.1.8-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

SNC set to SNC2

LLC Prefetch set to Disabled

UPI Link Disable set to Disabled 1 Link

C-state set to Legacy

```
Sysinfo program /home/cpu2017-1.1.8-ic2022.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on test1 Fri Jan 13 00:14:05 2023
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6418H
  2 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings : 48
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Gold 6418H
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	24

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Platform Notes (Continued)

```

Socket(s): 2
Stepping: 8
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx
      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
      umipk uospke waitpkg avx512_vbmi2 gfn1 vaes vpclmulqdq avx512_vnni avx512_bitalg
      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd
      fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll
      arch_capabilities
Virtualization: VT-x
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 96 MiB (48 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    2.3M   12 Data          1       64        1           64
  L1i     32K    1.5M    8 Instruction   1       64        1           64
  L2      2M     96M   16 Unified        2      2048        1           64
  L3     60M    120M   15 Unified        3     65536        1           64

```

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59
node 0 size: 128681 MB
node 0 free: 127905 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71
node 1 size: 128983 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Platform Notes (Continued)

```
node 1 free: 128509 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 129017 MB
node 2 free: 128709 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 128989 MB
node 3 free: 128634 MB
node distances:
node   0   1   2   3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12
 3: 21 21 12 10

From /proc/meminfo
MemTotal:      528048088 kB
HugePages_Total:          0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
Linux test1 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC
2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jan 13 00:11

SPEC is set to: /home/cpu2017-1.1.8-ic2022.1
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb2        xfs   894G   56G  839G   7%  /

From /sys/devices/virtual/dmi/id
Vendor:        Lenovo
Product:       ThinkSystem SR630 V3
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Platform Notes (Continued)

Product Family: ThinkSystem
Serial: 1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
5x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
10x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

BIOS:

BIOS Vendor: Lenovo
BIOS Version: ESE109L-1.10
BIOS Date: 01/07/2023
BIOS Revision: 1.10
Firmware Revision: 1.0

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbm_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html>
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 428

SPECrate®2017_int_peak = 439

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Eaglestream-N.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-12 11:14:05-0500.

Report generated on 2024-01-29 17:20:40 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.