



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3


**Test Date:** Jan-2023

**Test Sponsor:** HPE

**Hardware Availability:** Dec-2022

**Tested by:** HPE

**Software Availability:** Nov-2022

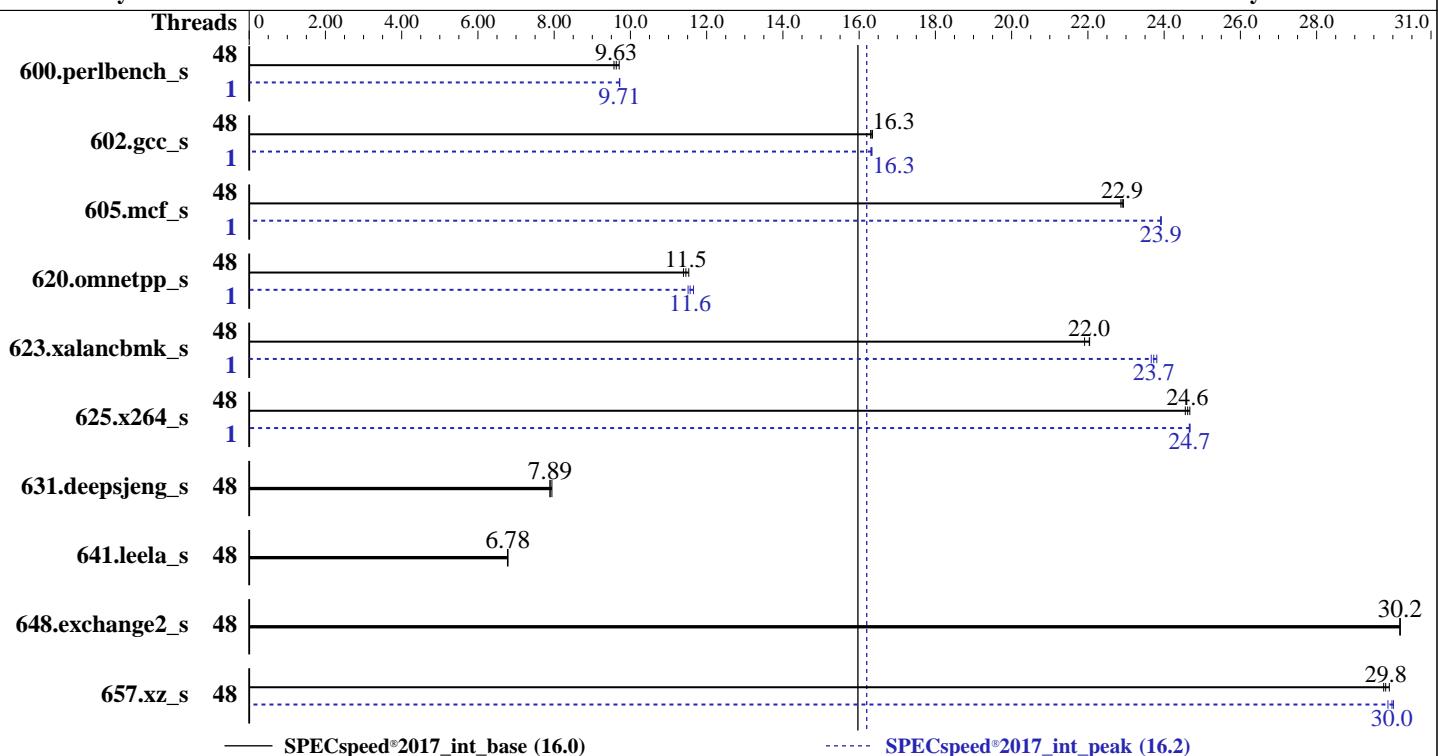

<b>Hardware</b>		<b>Software</b>	
CPU Name:	AMD EPYC 9274F	OS:	Ubuntu 22.04.1 LTS
Max MHz:	4300	Compiler:	Kernel 5.15.0-56-generic
Nominal:	4050	Parallel:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	48 cores, 2 chips	Firmware:	Yes
Orderable:	1,2 chips	File System:	HPE BIOS Version v1.12 11/24/2022 released
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	Nov-2022
L2:	1 MB I+D on chip per core	Base Pointers:	ext4
L3:	256 MB I+D on chip per chip, 32 MB shared / 3 cores	Peak Pointers:	Run level 5 (multi-user)
Other:	None	Other:	64-bit
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)	Power Management:	64-bit
Storage:	1 x 480 GB SATA SSD		BIOS and OS set to prefer performance at
Other:	None		the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3

Test Date: Jan-2023

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	183	9.71	<b>184</b>	<b>9.63</b>	185	9.57	1	183	9.72	<b>183</b>	<b>9.71</b>	183	9.71	183	9.71
602.gcc_s	48	244	16.3	244	16.3	<b>244</b>	<b>16.3</b>	1	244	16.3	<b>244</b>	<b>16.3</b>	244	16.3	244	16.3
605.mcf_s	48	<b>206</b>	<b>22.9</b>	206	22.9	206	22.9	1	197	23.9	197	23.9	<b>197</b>	<b>23.9</b>	197	23.9
620.omnetpp_s	48	141	11.5	143	11.4	<b>142</b>	<b>11.5</b>	1	140	11.7	<b>141</b>	<b>11.6</b>	142	11.5	142	11.5
623.xalancbmk_s	48	64.3	22.0	64.7	21.9	<b>64.3</b>	<b>22.0</b>	1	<b>59.7</b>	<b>23.7</b>	59.5	23.8	59.9	23.7	59.9	23.7
625.x264_s	48	71.5	24.7	<b>71.7</b>	<b>24.6</b>	71.8	24.6	1	71.5	24.7	<b>71.5</b>	<b>24.7</b>	71.5	24.7	71.5	24.7
631.deepsjeng_s	48	<b>182</b>	<b>7.89</b>	180	7.94	182	7.89	48	<b>182</b>	<b>7.89</b>	180	7.94	182	7.89	182	7.89
641.leela_s	48	<b>251</b>	<b>6.78</b>	252	6.77	251	6.79	48	<b>251</b>	<b>6.78</b>	252	6.77	251	6.79	251	6.79
648.exchange2_s	48	97.4	30.2	97.4	30.2	<b>97.4</b>	<b>30.2</b>	48	97.4	30.2	97.4	30.2	<b>97.4</b>	<b>30.2</b>	97.4	30.2
657.xz_s	48	207	29.9	208	29.8	<b>207</b>	<b>29.8</b>	48	<b>206</b>	<b>30.0</b>	207	29.9	206	30.0	206	30.0

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-47"  
LD\_LIBRARY\_PATH = "/home/CPU2017/amd\_speed\_aocc400\_genoa\_B\_lib/lib:  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "48"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(4.05 GHz, AMD EPYC 9274F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

NUMA memory domains per socket set to Four memory domains per socket

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0xa10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaAPI 1.0.0.1-L6

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d  
running on admin1 Mon Jun 27 18:41:56 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9274F 24-Core Processor

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu from util-linux 2.37.2:

Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3

**Test Date:** Jan-2023

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9274F 24-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	24
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	4304.0000
CPU min MHz:	400.0000
BogoMIPS:	8087.85
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mbm_total cq_m_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization:	AMD-V
L1d cache:	1.5 MiB (48 instances)
L1i cache:	1.5 MiB (48 instances)
L2 cache:	48 MiB (48 instances)
L3 cache:	512 MiB (16 instances)
NUMA node(s):	16
NUMA node0 CPU(s):	0-2
NUMA node1 CPU(s):	12-14
NUMA node2 CPU(s):	6-8
NUMA node3 CPU(s):	18-20
NUMA node4 CPU(s):	9-11
NUMA node5 CPU(s):	21-23
NUMA node6 CPU(s):	3-5
NUMA node7 CPU(s):	15-17
NUMA node8 CPU(s):	24-26

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3

**Test Date:** Jan-2023

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

NUMA node9 CPU(s):	36-38
NUMA node10 CPU(s):	30-32
NUMA node11 CPU(s):	42-44
NUMA node12 CPU(s):	33-35
NUMA node13 CPU(s):	45-47
NUMA node14 CPU(s):	27-29
NUMA node15 CPU(s):	39-41
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0 1 2

node 0 size: 96456 MB

node 0 free: 96335 MB

node 1 cpus: 12 13 14

node 1 size: 96767 MB

node 1 free: 96651 MB

node 2 cpus: 6 7 8

node 2 size: 96767 MB

node 2 free: 96672 MB

node 3 cpus: 18 19 20

node 3 size: 96767 MB

node 3 free: 96678 MB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 4 cpus: 9 10 11
node 4 size: 96731 MB
node 4 free: 96603 MB
node 5 cpus: 21 22 23
node 5 size: 96767 MB
node 5 free: 96690 MB
node 6 cpus: 3 4 5
node 6 size: 96767 MB
node 6 free: 96688 MB
node 7 cpus: 15 16 17
node 7 size: 96767 MB
node 7 free: 96686 MB
node 8 cpus: 24 25 26
node 8 size: 96767 MB
node 8 free: 96611 MB
node 9 cpus: 36 37 38
node 9 size: 96767 MB
node 9 free: 96632 MB
node 10 cpus: 30 31 32
node 10 size: 96767 MB
node 10 free: 96703 MB
node 11 cpus: 42 43 44
node 11 size: 96767 MB
node 11 free: 96521 MB
node 12 cpus: 33 34 35
node 12 size: 96767 MB
node 12 free: 96615 MB
node 13 cpus: 45 46 47
node 13 size: 96767 MB
node 13 free: 96647 MB
node 14 cpus: 27 28 29
node 14 size: 96767 MB
node 14 free: 96639 MB
node 15 cpus: 39 40 41
node 15 size: 96719 MB
node 15 free: 96591 MB
node distances:
node   0    1    2    3    4    5    6    7    8    9    10   11   12   13   14   15
  0: 10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  1: 11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  2: 12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
  3: 12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
  4: 12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
  5: 12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
  6: 12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
  7: 12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
  8: 32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 3

Test Date: Jan-2023

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Platform Notes (Continued)

9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	11	10	12	12	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	10	11	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	11	10	10	10

From /proc/meminfo

```
MemTotal:      1585029328 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

```
Current active profile: throughput-performance
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

/usr/bin/lsb\_release -d  
Ubuntu 22.04.1 LTS

From /etc/\*release\* /etc/\*version\*
debian\_version: bookworm/sid
os-release:
PRETTY\_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION\_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION\_CODENAME=jammy
ID=ubuntu
ID\_LIKE=debian
HOME\_URL="https://www.ubuntu.com/"

uname -a:  
Linux admin1 5.15.0-56-generic #62-Ubuntu SMP Tue Nov 22 19:54:14 UTC 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(4.05 GHz, AMD EPYC 9274F)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Bypass disabled via prctl and seccomp

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Mitigation: Retpolines, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling, PBRSB-eIBRS: Not affected

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Jun 27 18:30

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	37G	382G	9%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL385 Gen11
Product Family:	ProLiant
Serial:	DL385G11-008

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

BIOS:

BIOS Vendor:	HPE
BIOS Version:	1.12
BIOS Date:	11/24/2022
BIOS Revision:	1.12
Firmware Revision:	1.10

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

Fortran | 648.exchange2\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_S: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Base Portability Flags (Continued)

```
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -fsto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-Wl,-allow-multiple-definition -z muldefs -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(4.05 GHz, AMD EPYC 9274F)

**SPECspeed®2017\_int\_base = 16.0**

**SPECspeed®2017\_int\_peak = 16.2**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-02-15.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-02-15.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-27 14:41:56-0400.

Report generated on 2023-02-15 10:31:18 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.