



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

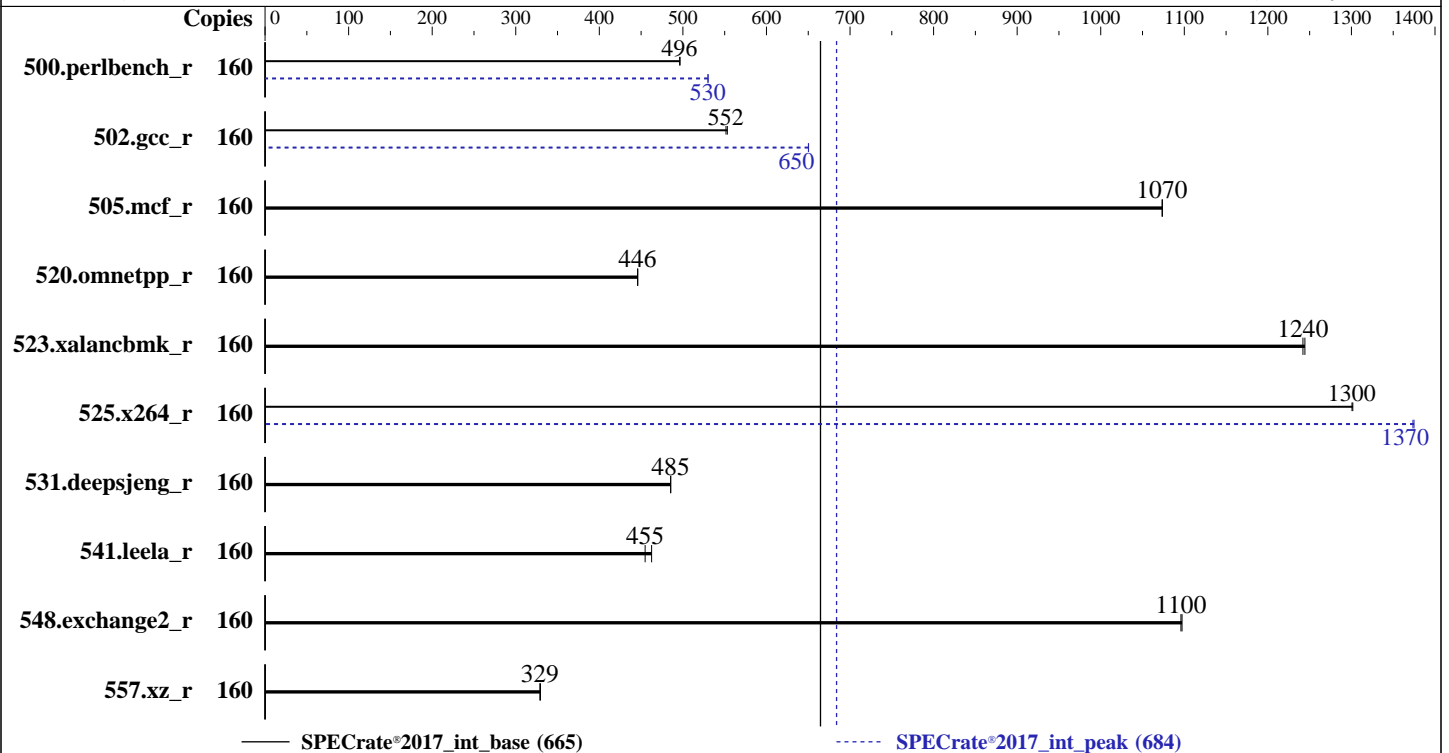

Hardware

CPU Name: Intel Xeon Platinum 8460Y+
 Max MHz: 3700
 Nominal: 2000
 Enabled: 80 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)
 4.18.0-372.9.1.el8.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 1.0.1 released Dec-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	513	497	513	496			160	480	530	481	530		
502.gcc_r	160	410	553	411	552			160	348	650	348	650		
505.mcf_r	160	241	1070	241	1070			160	241	1070	241	1070		
520.omnetpp_r	160	471	446	471	446			160	471	446	471	446		
523.xalancbmk_r	160	136	1240	136	1240			160	136	1240	136	1240		
525.x264_r	160	215	1300	215	1300			160	204	1370	204	1370		
531.deepsjeng_r	160	378	485	378	485			160	378	485	378	485		
541.leela_r	160	573	463	583	455			160	573	463	583	455		
548.exchange2_r	160	382	1100	382	1100			160	382	1100	382	1100		
557.xz_r	160	524	330	526	329			160	524	330	526	329		

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = 684

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

ADDC Setting : Disabled
 DIMM Self Healing on
 Uncorrectable Memory Error : Disabled
 Virtualization Technology : Disabled
 Sub NUMA Cluster : 4-way Clustering
 DCU Streamer Prefetcher : Disabled
 LLC Prefetch : Disabled
 Dead Line LLC Alloc : Disabled
 Optimizer Mode : Enabled

System Profile : Custom
 CPU Power Management : Maximum Performance
 CLE : Disabled
 C States : Autonomous
 Memory Patrol Scrub : Disabled
 Energy Efficiency Policy : Performance
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Fri Jan 13 13:29:20 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 239 (239-58.e18)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
13:29:20 up 9 min, 1 user, load average: 0.36, 0.16, 0.06
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1    -              13:26   24.00s  1.03s  0.00s /bin/bash ./dell-norun-specrate.sh
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126062
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126062
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Platform Notes (Continued)

```

/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=160 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=80 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=160 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=80 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
  --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8460Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode     : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 40
siblings       : 80
2 physical ids (chips)
160 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 0: apicids 0-79
physical id 1: apicids 128-207

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 160
On-line CPU(s) list: 0-159
Thread(s) per core: 2
Core(s) per socket: 40
Socket(s): 2
NUMA node(s): 8
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
CPU family: 6
Model: 143
Model name: Intel(R) Xeon(R) Platinum 8460Y+
BIOS Model name: Intel(R) Xeon(R) Platinum 8460Y+
Stepping: 8

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

```

CPU MHz:                2000.000
BogoMIPS:               4000.00
L1d cache:              48K
L1i cache:              32K
L2 cache:               2048K
L3 cache:               107520K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,80,84,88,92,96,100,104,108,112,116
NUMA node1 CPU(s):     40,44,48,52,56,60,64,68,72,76,120,124,128,132,136,140,144,148,152,156
NUMA node2 CPU(s):     2,6,10,14,18,22,26,30,34,38,82,86,90,94,98,102,106,110,114,118
NUMA node3 CPU(s):     42,46,50,54,58,62,66,70,74,78,122,126,130,134,138,142,146,150,154,158
NUMA node4 CPU(s):     1,5,9,13,17,21,25,29,33,37,81,85,89,93,97,101,105,109,113,117
NUMA node5 CPU(s):     41,45,49,53,57,61,65,69,73,77,121,125,129,133,137,141,145,149,153,157
NUMA node6 CPU(s):     3,7,11,15,19,23,27,31,35,39,83,87,91,95,99,103,107,111,115,119
NUMA node7 CPU(s):     43,47,51,55,59,63,67,71,75,79,123,127,131,135,139,143,147,151,155,159
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                        acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                        arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf
                        tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                        f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                        rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,80,84,88,92,96,100,104,108,112,116
node 0 size: 128472 MB
node 0 free: 126011 MB
node 1 cpus: 40,44,48,52,56,60,64,68,72,76,120,124,128,132,136,140,144,148,152,156
node 1 size: 129019 MB
node 1 free: 127136 MB
node 2 cpus: 2,6,10,14,18,22,26,30,34,38,82,86,90,94,98,102,106,110,114,118
node 2 size: 129019 MB
node 2 free: 127597 MB
node 3 cpus: 42,46,50,54,58,62,66,70,74,78,122,126,130,134,138,142,146,150,154,158
node 3 size: 129019 MB
node 3 free: 126204 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,81,85,89,93,97,101,105,109,113,117
node 4 size: 129019 MB
node 4 free: 128594 MB
node 5 cpus: 41,45,49,53,57,61,65,69,73,77,121,125,129,133,137,141,145,149,153,157
node 5 size: 128977 MB
node 5 free: 128804 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,83,87,91,95,99,103,107,111,115,119
node 6 size: 129019 MB
node 6 free: 128789 MB
node 7 cpus: 43,47,51,55,59,63,67,71,75,79,123,127,131,135,139,143,147,151,155,159
node 7 size: 129007 MB
node 7 free: 128837 MB
node distances:
node  0  1  2  3  4  5  6  7
0:    10  12  12  12  21  21  21  21

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

```

1: 12 10 12 12 21 21 21 21
2: 12 12 10 12 21 21 21 21
3: 12 12 12 10 21 21 21 21
4: 21 21 21 21 10 12 12 12
5: 21 21 21 21 12 10 12 12
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1056312172 kB

```

```

-----
10. who -r
run-level 3 Jan 13 13:20

```

```

-----
11. Systemd service manager version: systemd 239 (239-58.e18)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd autovt@ crond
firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
loadmodules lvm2-monitor mdmonitor microcode multipathd nis-domainname rhsmcertd rsyslog
selinux-autorelabel-mark sshd sssd syslog timedatex tuned udisks2
disabled blk-availability chrony-wait chronyd cni-dhcp console-getty cpupower debug-shell ebttables
hwloc-dump-hwdata iprdump iprinit iprupdate ipsec iscsid iscsiui0 kvm_stat
man-db-restart-cache-update nftables podman podman-auto-update podman-restart rdisc rhcd rhsm
rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsd
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt4)/vmlinuz-4.18.0-372.9.1.el8.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Platform Notes (Continued)

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   0
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.6 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release Red Hat Enterprise Linux release 8.6 (Ootpa)

```

```

-----
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit      Not affected
l1tf                Not affected
mds                 Not affected
meltdown            Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1          Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2          Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds               Not affected
tsx_async_abort     Not affected

```

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

```

-----
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	3.7G	122G	3%	/mnt/ramdisk

```

22. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge C6620
Product Family: PowerEdge

```

```

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

```

```

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.0.1
BIOS Date: 12/27/2022
BIOS Revision: 1.0

```

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Compiler Version Notes (Continued)

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemallocc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 665

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_int_peak = 684

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-13 14:29:19-0500.

Report generated on 2024-01-29 17:22:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-14.