



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016


Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

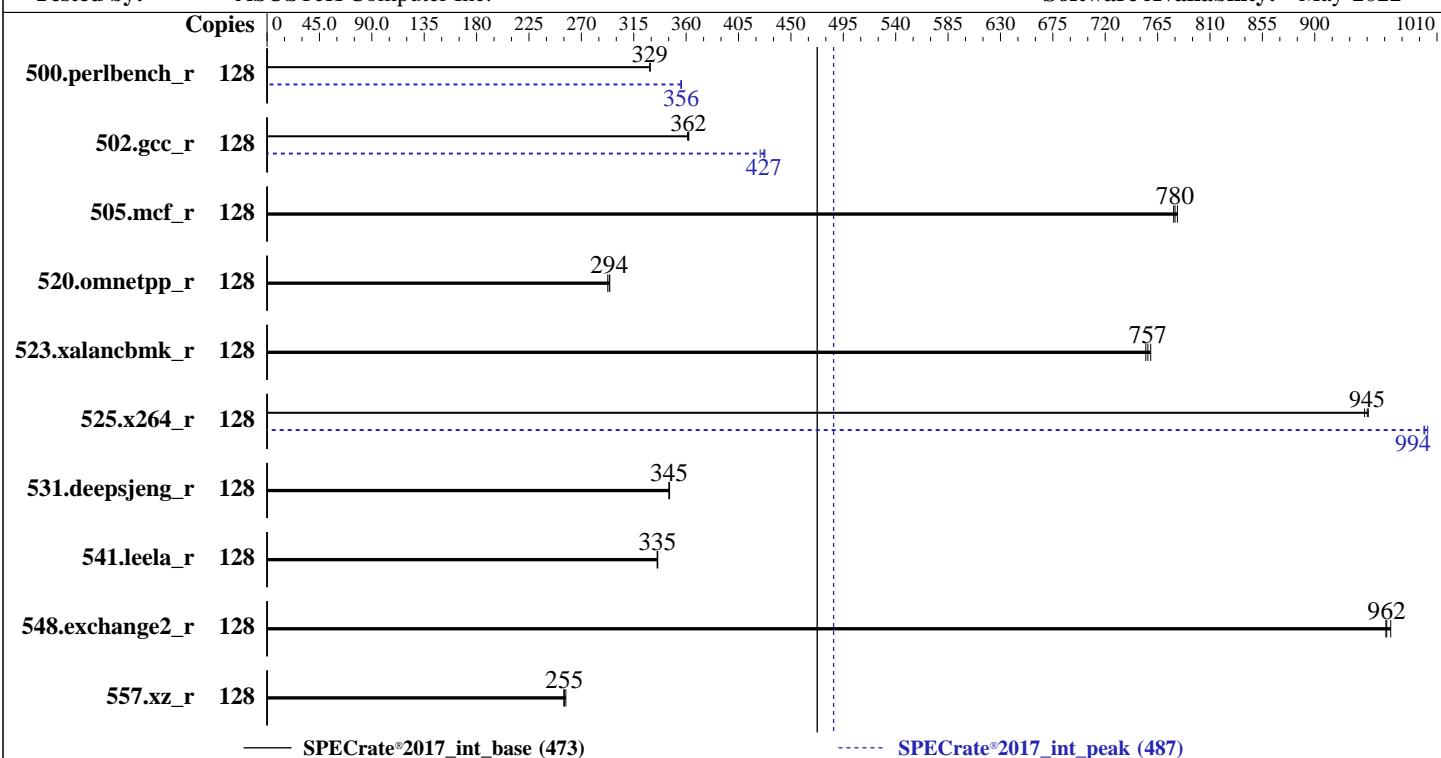

— SPECrate®2017_int_base (473)

----- SPECrate®2017_int_peak (487)

Hardware

CPU Name: Intel Xeon Platinum 8352Y
Max MHz: 3400
Nominal: 2200
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 48 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 1 TB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa)
Compiler: 4.18.0-305.25.1.el8_4.x86_64
C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 0802 released Apr-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	620	329	620	329	619	329	128	573	356	572	356	573	356	573	356
502.gcc_r	128	501	362	502	361	500	362	128	428	424	424	428	425	427	425	427
505.mcf_r	128	265	782	266	779	265	780	128	265	782	266	779	265	780	265	780
520.omnetpp_r	128	570	294	571	294	574	293	128	570	294	571	294	574	293	574	293
523.xalancbmk_r	128	178	759	179	755	179	757	128	178	759	179	755	179	757	179	757
525.x264_r	128	237	945	238	943	237	946	128	225	994	225	997	226	994	226	994
531.deepsjeng_r	128	424	346	425	345	425	345	128	424	346	425	345	425	345	425	345
541.leela_r	128	633	335	632	336	632	335	128	633	335	632	336	632	335	632	335
548.exchange2_r	128	347	965	349	961	349	962	128	347	965	349	961	349	962	349	962
557.xz_r	128	542	255	539	257	541	255	128	542	255	539	257	541	255	541	255
SPECrate®2017_int_base = 473																
SPECrate®2017_int_peak = 487																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/ic22u1/lib/intel64:/home/ic22u1/lib/ia32:/home/ic22u1/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

SNC = Enable SNC2 (2-clusters)

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /home/ic22u1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Feb 7 09:52:48 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-45.el8_4.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
-----
1. uname -a
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11 EDT 2021 x86_64 x86_64
x86_64 GNU/Linux
-----
2. w
09:52:48 up 1 min, 1 user, load average: 2.52, 1.59, 0.62
USER      TTY      FROM             LOGIN@     IDLE     JCPU     PCPU WHAT
root      tty1      -               09:51     8.00s   1.26s   0.01s -bash
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4126642
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4126642
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 17
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.318/templogs/preenv.intrate.318.0.log --lognum 318.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/ic22u1
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping        : 6
microcode       : 0xd000331
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):           4
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
CPU family:             6
Model:                 106
Model name:             Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
BIOS Model name:        Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
Stepping:               6
CPU MHz:                2980.825
CPU max MHz:            3400.0000
CPU min MHz:            800.0000
BogoMIPS:               4400.00
Virtualization:         VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:                1280K
L3 cache:                49152K
NUMA node0 CPU(s):      0-15,64-79
NUMA node1 CPU(s):      16-31,80-95
NUMA node2 CPU(s):      32-47,96-111
NUMA node3 CPU(s):      48-63,112-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                        acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                        arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pnpi
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                        sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
                        stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
                        bmil hle avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqmq_llc cqmq_occu11c cqmq_mbmb_total cqmq_mbmb_local split_lock_detect
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-15,64-79

node 0 size: 257580 MB

node 0 free: 256802 MB

node 1 cpus: 16-31,80-95

node 1 size: 258040 MB

node 1 free: 257733 MB

node 2 cpus: 32-47,96-111

node 2 size: 258040 MB

node 2 free: 257773 MB

node 3 cpus: 48-63,112-127

node 3 size: 258038 MB

node 3 free: 257722 MB

node distances:

node 0 1 2 3

0: 10 11 20 20

1: 11 10 20 20

2: 20 20 10 11

3: 20 20 11 10

9. /proc/meminfo

MemTotal: 1056461372 kB

10. who -r

run-level 3 Feb 7 09:51

11. Systemd service manager version: systemd 239 (239-45.el8_4.3)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronynd
crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
nvmefc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd
sssd syslog sysstat timedatectl tuned udisks2 vdo

disabled arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables fancontrol
grafana-server iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon nftables
nis-domainname nvmf-autoconnect oddjobd pmfind pmie_check pmlogger_check pmlogger_daily_report
pmlogger_daily_report-poll pmproxy podman-auto-update postfix powertop psacct ras-mc-ctl
rasdaemon rdisc rhcd rhsm rhsm-facts rrdcached saslauthd serial-getty@ sshd-keygen@
systemd-resolved tcscd

indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.25.1.el8_4.x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.40 GHz.
                The governor "performance" may decide which speed to use
                within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
15. tuned-adm active
Current active profile: throughput-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    0
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag              1
max_ptes_none       511
max_ptes_swap       64
pages_to_scan       4096
scan_sleep_millisecs 10000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

19. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
```

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

itlb_multihit	Not affected
l1tf	Not affected
mds	Not affected
meltdown	Not affected
spec_store_bypass	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds	Not affected
tsx_async_abort	Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information

SPEC is set to: /home/ic22ul

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	878G	120G	759G	14%	/home

22. /sys/devices/virtual/dmi/id

Vendor:	ASUSTeK COMPUTER INC.
Product:	RS720-E10-RS12
Product Family:	Server
Serial:	012345678901

23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0802
BIOS Date:	04/29/2022
BIOS Revision:	8.2

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C      | 502.gcc_r(peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECrate®2017_int_base = 473

SPECrate®2017_int_peak = 487

CPU2017 License: 9016

Test Date: Feb-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-07 09:52:48-0500.

Report generated on 2024-01-29 17:24:50 by CPU2017 PDF formatter v6716.

Originally published on 2023-03-14.