



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138


Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

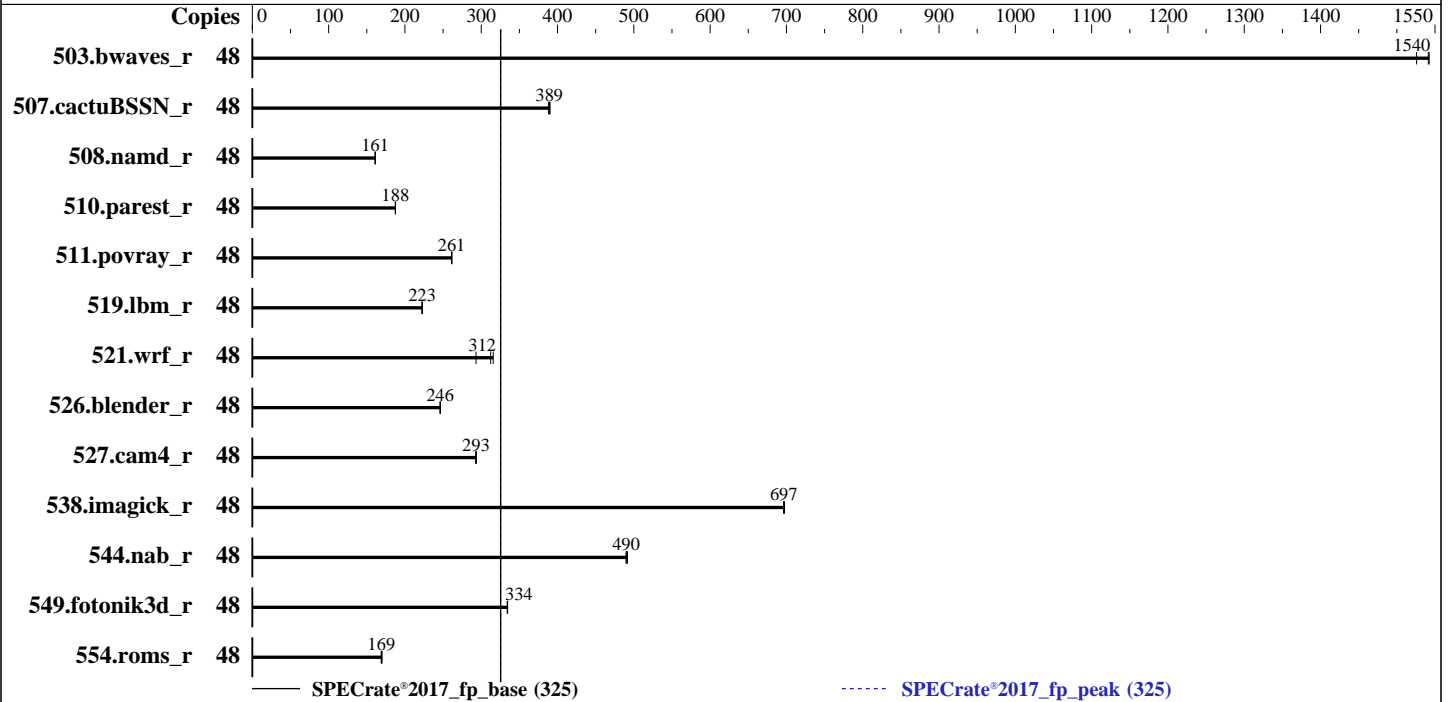

Hardware

CPU Name: Intel Xeon Silver 4410Y
 Max MHz: 3900
 Nominal: 2000
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Nettrix BIOS Version NNH1041018-U00-1 released Nov-2022
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	315	1530	312	1540	<u>312</u>	<u>1540</u>	48	315	1530	312	1540	<u>312</u>	<u>1540</u>
507.cactuBSSN_r	48	157	388	156	390	<u>156</u>	<u>389</u>	48	157	388	156	390	<u>156</u>	<u>389</u>
508.namd_r	48	283	161	<u>283</u>	<u>161</u>	283	161	48	283	161	<u>283</u>	<u>161</u>	283	161
510.parest_r	48	<u>670</u>	<u>188</u>	670	188	670	188	48	<u>670</u>	<u>188</u>	670	188	670	188
511.povray_r	48	429	261	<u>429</u>	<u>261</u>	429	261	48	429	261	<u>429</u>	<u>261</u>	429	261
519.lbm_r	48	<u>227</u>	<u>223</u>	227	223	227	222	48	<u>227</u>	<u>223</u>	227	223	227	222
521.wrf_r	48	<u>344</u>	<u>312</u>	367	293	341	316	48	<u>344</u>	<u>312</u>	367	293	341	316
526.blender_r	48	297	246	<u>297</u>	<u>246</u>	297	246	48	297	246	<u>297</u>	<u>246</u>	297	246
527.cam4_r	48	286	294	287	293	<u>286</u>	<u>293</u>	48	286	294	287	293	<u>286</u>	<u>293</u>
538.imagick_r	48	171	698	<u>171</u>	<u>697</u>	171	696	48	171	698	<u>171</u>	<u>697</u>	171	696
544.nab_r	48	<u>165</u>	<u>490</u>	165	490	164	492	48	<u>165</u>	<u>490</u>	165	490	164	492
549.fotonik3d_r	48	559	335	<u>559</u>	<u>334</u>	560	334	48	559	335	<u>559</u>	<u>334</u>	560	334
554.roms_r	48	448	170	<u>451</u>	<u>169</u>	451	169	48	448	170	<u>451</u>	<u>169</u>	451	169

SPECrate®2017_fp_base = 325

SPECrate®2017_fp_peak = 325

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
SNC (Sub NUMA) set to Enable SNC4 (4-clusters)
Patrol Scrub set to Disabled
LLC dead line alloc set to Disabled
XPT Prefetch set to Enabled
KTI Prefetch set to Disabled
DCU Streamer Prefetcher set to Disabled
Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Apr 30 02:21:01 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
02:21:01 up 6:21, 1 user, load average: 18.90, 39.82, 45.15
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      tty1     -             20:08       6:12m      1.14s   0.01s  -bash
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4125297
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125297
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 29
   login -- root
   -bash
   -bash
   runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --define numcopies=48 -c
     ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=24 --define physicalfirst
       --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
   runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --define numcopies=48
     --configfile ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=24 --define
     physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
     --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.074/templogs/preenv.fprate.074.0.log --lognum 074.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/lijq

```

```

6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Silver 4410Y
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 143
   stepping       : 8
   microcode      : 0x2b000111
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swaggs
   cpu cores      : 12
   siblings       : 24
   2 physical ids (chips)
   48 processors (hardware threads)
   physical id 0: core ids 0-11
   physical id 1: core ids 0-11
   physical id 0: apicids 0-23
   physical id 1: apicids 128-151

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            48
On-line CPU(s) list: 0-47
Vendor ID:         GenuineIntel

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Silver 4410Y
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
Stepping: 8
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 48 MiB (24 instances)
L3 cache: 60 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 257531 MB
node 0 free: 248058 MB
node 1 cpus: 6-11,30-35
node 1 size: 258044 MB
node 1 free: 251931 MB
node 2 cpus: 12-17,36-41
node 2 size: 258044 MB
node 2 free: 252164 MB
node 3 cpus: 18-23,42-47
node 3 size: 257724 MB
node 3 free: 251792 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056098656 kB

10. who -r

run-level 3 Apr 29 20:00

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

enabled          apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump
                  kdump-early postfix purge-kernels rollback smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                  wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                  exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load
                  lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ smartd_generate_opts
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd tuned
indirect         wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=85a6fd00-fd0c-4883-b29c-e0cf4342a6ea
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=300M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     10
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode              0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/lijq
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs 892G  165G  726G  19% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          Nettrix
Product:         R620 G50
Product Family: Rack
Serial:          6101810603447823

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800, configured at 4000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041018-U00-1
BIOS Date: 11/01/2022
BIOS Revision: 5.29

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_fp_base = 325

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECrate®2017_fp_peak = 325

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-29 14:21:01-0400.

Report generated on 2023-04-12 12:50:07 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.