



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11


(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

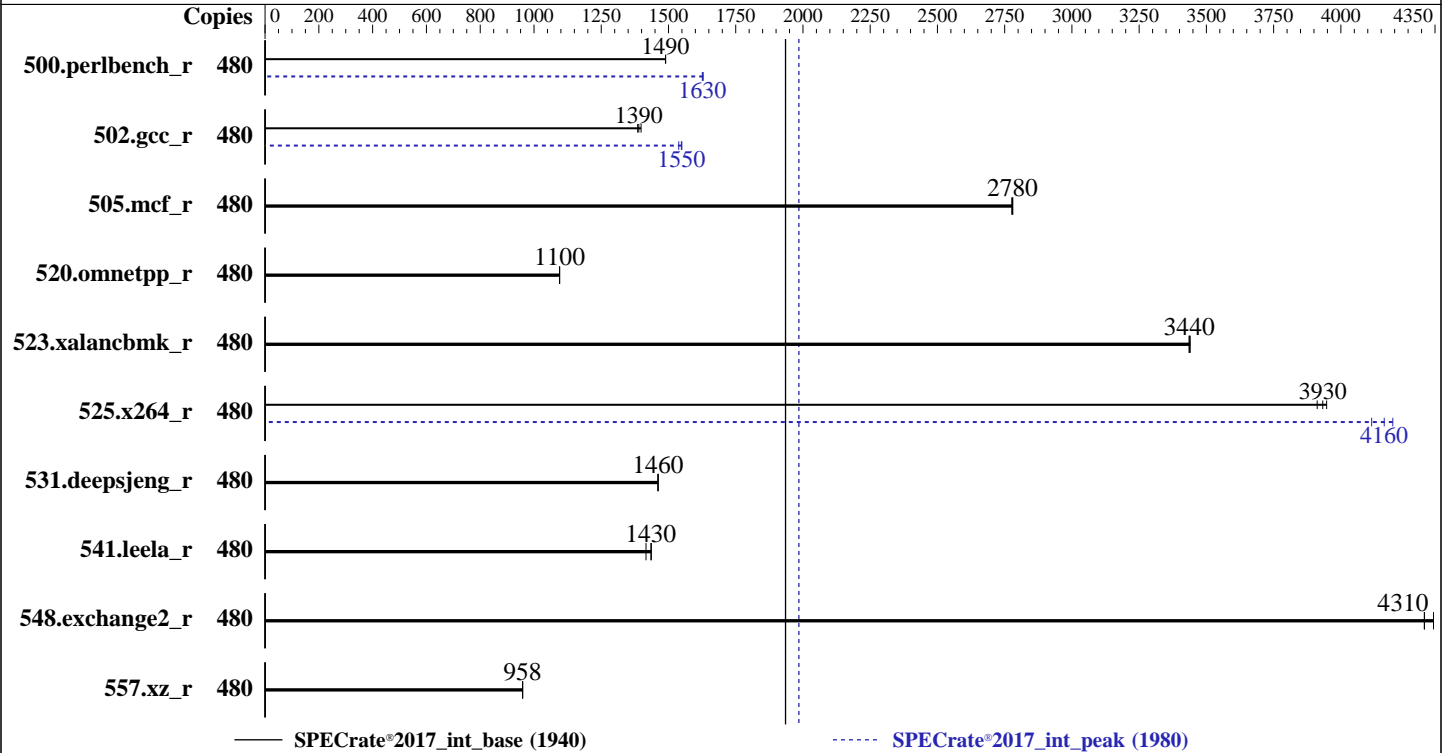

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 240 cores, 4 chips, 2 threads/core
Orderable: 1, 2, 4 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	480	513	1490	513	1490	513	1490	480	470	1630	469	1630	470	1630
502.gcc_r	480	489	1390	486	1400	491	1390	480	439	1550	439	1550	442	1540
505.mcf_r	480	279	2780	279	2780	279	2780	480	279	2780	279	2780	279	2780
520.omnetpp_r	480	575	1100	575	1100	575	1100	480	575	1100	575	1100	575	1100
523.xalancbmk_r	480	147	3440	147	3440	148	3440	480	147	3440	147	3440	148	3440
525.x264_r	480	215	3910	214	3930	213	3950	480	202	4160	200	4190	204	4110
531.deepsjeng_r	480	377	1460	376	1460	376	1460	480	377	1460	376	1460	376	1460
541.leela_r	480	554	1430	561	1420	553	1440	480	554	1430	561	1420	553	1440
548.exchange2_r	480	292	4310	289	4340	292	4310	480	292	4310	289	4340	292	4310
557.xz_r	480	541	958	541	958	541	958	480	541	958	541	958	541	958

SPECrate®2017_int_base = **1940**

SPECrate®2017_int_peak = **1980**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Accelerator-Performance using "tuned-adm profile accelerator-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0001b0 for the Intel Xeon Platinum 8490H Processor

BIOS Configuration

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Intel UPI Link Power Management set to Enabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu Apr 7 05:35:14 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
-----
2. w
05:35:14 up 5 min, 2 users, load average: 1.33, 10.40, 6.34
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1     05:32   2:33   0.00s  0.00s  -bash
root      pts/0   05:32  10.00s  1.08s  0.01s  -bash
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126283
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126283
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 27
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.008/templogs/preenv.intrate.008.0.log --lognum 008.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 60
siblings       : 120
4 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                480
On-line CPU(s) list:   0-479
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):             4
Stepping:              6
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                      invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                      vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpcmlmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

Virtualization:

```
VT-x
L1d cache: 11.3 MiB (240 instances)
L1i cache: 7.5 MiB (240 instances)
L2 cache: 480 MiB (240 instances)
L3 cache: 450 MiB (4 instances)
```

NUMA node(s):

```
16
NUMA node0 CPU(s): 0-14,240-254
NUMA node1 CPU(s): 15-29,255-269
NUMA node2 CPU(s): 30-44,270-284
NUMA node3 CPU(s): 45-59,285-299
NUMA node4 CPU(s): 60-74,300-314
NUMA node5 CPU(s): 75-89,315-329
NUMA node6 CPU(s): 90-104,330-344
NUMA node7 CPU(s): 105-119,345-359
NUMA node8 CPU(s): 120-134,360-374
NUMA node9 CPU(s): 135-149,375-389
NUMA node10 CPU(s): 150-164,390-404
NUMA node11 CPU(s): 165-179,405-419
NUMA node12 CPU(s): 180-194,420-434
NUMA node13 CPU(s): 195-209,435-449
NUMA node14 CPU(s): 210-224,450-464
NUMA node15 CPU(s): 225-239,465-479
```

Vulnerability Itlb multihit:

```
Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0-14,240-254
node 0 size: 64092 MB
node 0 free: 62707 MB
node 1 cpus: 15-29,255-269
node 1 size: 64505 MB
node 1 free: 64112 MB
node 2 cpus: 30-44,270-284
node 2 size: 64505 MB
node 2 free: 63836 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

node 3 cpus: 45-59,285-299
node 3 size: 64505 MB
node 3 free: 63743 MB
node 4 cpus: 60-74,300-314
node 4 size: 64505 MB
node 4 free: 64193 MB
node 5 cpus: 75-89,315-329
node 5 size: 64505 MB
node 5 free: 64177 MB
node 6 cpus: 90-104,330-344
node 6 size: 64505 MB
node 6 free: 64199 MB
node 7 cpus: 105-119,345-359
node 7 size: 64505 MB
node 7 free: 64197 MB
node 8 cpus: 120-134,360-374
node 8 size: 64505 MB
node 8 free: 64202 MB
node 9 cpus: 135-149,375-389
node 9 size: 64505 MB
node 9 free: 64193 MB
node 10 cpus: 150-164,390-404
node 10 size: 64505 MB
node 10 free: 64192 MB
node 11 cpus: 165-179,405-419
node 11 size: 64469 MB
node 11 free: 64162 MB
node 12 cpus: 180-194,420-434
node 12 size: 64505 MB
node 12 free: 64180 MB
node 13 cpus: 195-209,435-449
node 13 size: 64505 MB
node 13 free: 64171 MB
node 14 cpus: 210-224,450-464
node 14 size: 64505 MB
node 14 free: 64199 MB
node 15 cpus: 225-239,465-479
node 15 size: 64476 MB
node 15 free: 64162 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 20 30 30 30 30 30 30 30 30 30 30 30 30 30 30
1:  20 10 30 30 30 30 30 30 30 30 30 30 30 30 30 30
2:  30 30 10 20 30 30 30 30 30 30 30 30 30 30 30 30
3:  30 30 20 10 30 30 30 30 30 30 30 30 30 30 30 30
4:  30 30 30 30 10 20 30 30 30 30 30 30 30 30 30 30
5:  30 30 30 30 20 10 30 30 30 30 30 30 30 30 30 30
6:  30 30 30 30 30 30 10 20 30 30 30 30 30 30 30 30
7:  30 30 30 30 30 30 20 10 30 30 30 30 30 30 30 30
8:  30 30 30 30 30 30 30 30 10 20 30 30 30 30 30 30
9:  30 30 30 30 30 30 30 30 20 10 30 30 30 30 30 30
10: 30 30 30 30 30 30 30 30 30 30 10 20 30 30 30 30
11: 30 30 30 30 30 30 30 30 30 30 20 10 30 30 30 30
12: 30 30 30 30 30 30 30 30 30 30 30 30 10 20 30 30
13: 30 30 30 30 30 30 30 30 30 30 30 30 20 10 30 30
14: 30 30 30 30 30 30 30 30 30 30 30 30 30 30 10 20
15: 30 30 30 30 30 30 30 30 30 30 30 30 30 20 10 20

```

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

MemTotal: 1056369196 kB

10. who -r
run-level 3 Apr 7 05:30

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat
man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: accelerator-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+advise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G  352G   20G  95% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL560 Gen11
Product Family: ProLiant
Serial:          CNX22605RZ
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  28x Hynix HMC88AEBRA168N 32 GB 2 rank 4800
  3x Hynix HMC88MEBRA113N 32 GB 2 rank 4800
  1x Hynix HMC88MEBRA115N 32 GB 2 rank 4800
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Version: 1.30
BIOS Date: 03/01/2023
BIOS Revision: 1.30
Firmware Revision: 1.20

Compiler Version Notes

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1940

SPECrate®2017_int_peak = 1980

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-06 20:05:14-0400.

Report generated on 2024-01-29 17:40:45 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.