



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

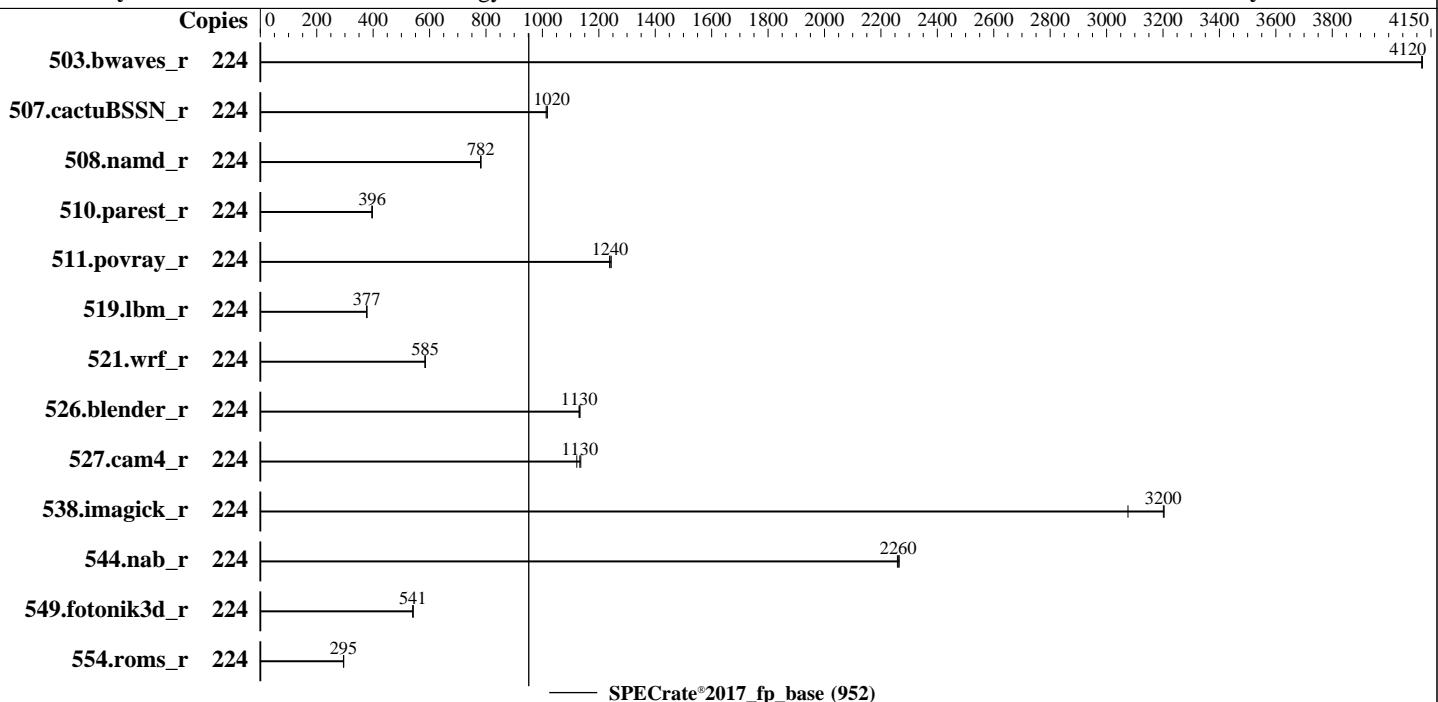

Hardware

CPU Name: Intel Xeon Platinum 8480+
Max MHz: 3800
Nominal: 2000
Enabled: 112 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 3.84 TB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
Compiler: Kernel 5.14.0-70.13.1.el9_0.x86_64
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version T8E120T 0.36 released Feb-2023
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	545	4120	545	4120	546	4120							
507.cactuBSSN_r	224	279	1020	279	1020	280	1010							
508.namd_r	224	273	781	272	782	272	782							
510.parest_r	224	1478	397	1480	396	1478	396							
511.povray_r	224	422	1240	420	1240	422	1240							
519.lbm_r	224	626	377	625	378	626	377							
521.wrf_r	224	859	584	858	585	858	585							
526.blender_r	224	302	1130	302	1130	301	1130							
527.cam4_r	224	349	1120	345	1140	346	1130							
538.imagick_r	224	181	3080	174	3200	174	3200							
544.nab_r	224	167	2260	167	2260	166	2260							
549.fotonik3d_r	224	1614	541	1614	541	1612	542							
554.roms_r	224	1204	296	1206	295	1208	295							

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu_report/lib/intel64:/home/cpu_report/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Mode set to Custom

SNC set to Enable SNC4 (4-clusters)

LLC Prefetch set to Enabled

DCU Streamer Prefetcher set to Disabled

C1 Enhanced Mode set to Disabled

Patrol Scrub set to Disabled

Intel Virtualization Technology set to Disabled

Package C State set to C0/C1 state

Sysinfo program /home/cpu_report/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Apr 15 01:09:21 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

2. w
01:09:21 up 3:22, 1 user, load average: 153.36, 207.08, 216.94
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root :1 21:48 ?xdm? 18:50 0.00s /usr/libexec/gdm-x-session --register-session --run-script
gnome-session

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124569
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124569
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu_report

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8480+
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 6
microcode : 0x2b000161
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores : 56

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
siblings      : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids 0-111
physical id 1: apicids 128-239
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               224
On-line CPU(s) list: 0-223
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
Model name:           Intel(R) Xeon(R) Platinum 8480+
BIOS Model name:     Intel(R) Xeon(R) Platinum 8480+
CPU family:          6
Model:                143
Thread(s) per core:  2
Core(s) per socket:  56
Socket(s):           2
Stepping:             6
CPU max MHz:         3800.0000
CPU min MHz:         800.0000
BogoMIPS:             4000.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer xsave avx f16c rdrand lahf_lm abm
                      3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                      tsc_adjust bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
                      rdseed adx smap avx512fma clflushopt clwb intel_pt avx512cd sha_ni
                      avx512bw avx512vl xsaveopt xsaves xgetbv1 xsaves cqmq_llc cqmq_occup_llc
                      cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16
                      wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                      avx512vbmi umip pkru ospke waitpkg avx512_vbmi2 gfni vpclmulqdq avx512_vnni
                      avx512_bitbalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                      movdiri movdir64b enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr
                      avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache:          5.3 MiB (112 instances)
L1i cache:          3.5 MiB (112 instances)
L2 cache:           224 MiB (112 instances)
L3 cache:           210 MiB (2 instances)
NUMA node(s):        8
NUMA node0 CPU(s):  0-13,112-125
NUMA node1 CPU(s):  14-27,126-139
NUMA node2 CPU(s):  28-41,140-153
NUMA node3 CPU(s):  42-55,154-167
NUMA node4 CPU(s):  56-69,168-181
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

NUMA node5 CPU(s):	70-83,182-195
NUMA node6 CPU(s):	84-97,196-209
NUMA node7 CPU(s):	98-111,210-223
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx sync abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-13,112-125
node 0 size: 128131 MB
node 0 free: 119412 MB
node 1 cpus: 14-27,126-139
node 1 size: 128981 MB
node 1 free: 122564 MB
node 2 cpus: 28-41,140-153
node 2 size: 129017 MB
node 2 free: 122475 MB
node 3 cpus: 42-55,154-167
node 3 size: 129017 MB
node 3 free: 122365 MB
node 4 cpus: 56-69,168-181
node 4 size: 129017 MB
node 4 free: 122454 MB
node 5 cpus: 70-83,182-195
node 5 size: 129017 MB
node 5 free: 122043 MB
node 6 cpus: 84-97,196-209
node 6 size: 129017 MB
node 6 free: 121732 MB
node 7 cpus: 98-111,210-223
node 7 size: 128998 MB
node 7 free: 122545 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 21 21 21 21
1: 12 10 12 12 21 21 21 21
2: 12 12 10 12 21 21 21 21
3: 12 12 12 10 21 21 21 21
4: 21 21 21 21 10 12 12 12
5: 21 21 21 21 12 10 12 12
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

9. /proc/meminfo
MemTotal: 1055950048 kB

10. who -r
run-level 5 Apr 14 21:47

11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger
power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat
systemd-network-generator udisks2 upower vgaauthd virtqemud vmtoolsd

enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd
httpd@ ibacm iprdump iprint iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodeudev virtnwfilterd
virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant

indirect pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
virtlockd virtlogd vsftpd@

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt6)/boot/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
root=UUID=0fcc2b80-3b7a-487a-8bd6-e3cddec3d533
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=d8abe978-c0ca-4381-ac68-dadfc58fd1c9
rhgb
quiet

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
boost state support:  
Supported: yes  
Active: yes
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs        60000  
defrag                      1  
max_ptes_none                511  
max_ptes_shared              256  
max_ptes_swap                64  
pages_to_scan                4096  
scan_sleep_millisecs         10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release      Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)  
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----  
20. Disk information  
SPEC is set to: /home/cpu_report  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda6        xfs   954G  158G  797G  17%  /
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:          Lenovo  
Product:         Lenovo WenTian GB5520 V3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Product Family: Lenovo
Serial: J80007RK

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
13x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
1x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: LENOVO
BIOS Version: T8E120T-0.36
BIOS Date: 02/13/2023
BIOS Revision: 5.29

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 952

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-WR5220-G3-R.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-WR5220-G3-R.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-14 13:09:21-0400.

Report generated on 2023-05-23 19:10:44 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.