



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

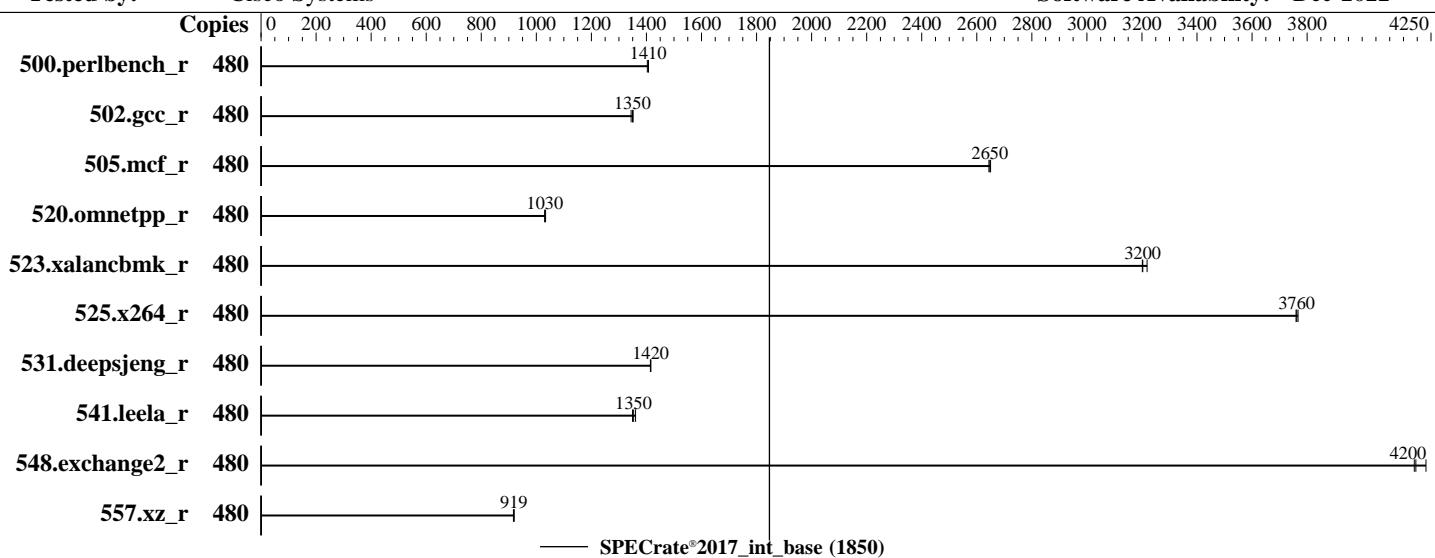

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips, 2 threads/core
 Orderable: 1,2,3,4 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.6 TB NVMe SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 5.1.1b released Apr-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	480	545	1400	543	1410	543	1410									
502.gcc_r	480	506	1340	503	1350	504	1350									
505.mcf_r	480	293	2640	293	2650	293	2650									
520.omnetpp_r	480	611	1030	611	1030			609	1030							
523.xalancbmk_r	480	158	3200	158	3200			157	3220							
525.x264_r	480	223	3760	224	3760			223	3770							
531.deepsjeng_r	480	389	1410	389	1420	389	1420									
541.leela_r	480	587	1350	584	1360			589	1350							
548.exchange2_r	480	300	4200	297	4230			300	4190							
557.xz_r	480	565	917	564	919	564	919									

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Sub NUMA Clustering set to Enable SNC4

LLC Dead Line set to Disabled

ADDDC Sparing set to Disabled

Processor C6 Report set to Enabled

UPI Link Power Management Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on spec-srv Thu May 4 22:51:58 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H,
1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux spec-srv 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
22:51:58 up 24 min, 1 user, load average: 0.30, 0.54, 3.88
USER   TTY      FROM             LOGIN@    IDLE   JCPU   PCPU WHAT
root   tty1     -           22:50   14.00s  1.74s  0.62s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 8255060
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 8255060
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=240 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all
  intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=240 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base
  --output_format all --nopower --runmode rate --tune base --size reftime --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.037/templogs/preenv.intrate.037.0.log --lognum 037.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode      : 0x2b000461
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores    : 60
siblings     : 120
4 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                480
On-line CPU(s) list:  0-479
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   60
Socket(s):             4
Stepping:              8
CPU max MHz:          3500.0000
CPU min MHz:          800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
                      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle
                      avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsavev cqmq_llc cqmq_occup_llc cqmq_mbm_total
                      cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pkru
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             11.3 MiB (240 instances)
L1i cache:             7.5 MiB (240 instances)
L2 cache:              480 MiB (240 instances)
L3 cache:              450 MiB (4 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H,
1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
NUMA node(s): 16
NUMA node0 CPU(s): 0-14,240-254
NUMA node1 CPU(s): 15-29,255-269
NUMA node2 CPU(s): 30-44,270-284
NUMA node3 CPU(s): 45-59,285-299
NUMA node4 CPU(s): 60-74,300-314
NUMA node5 CPU(s): 75-89,315-329
NUMA node6 CPU(s): 90-104,330-344
NUMA node7 CPU(s): 105-119,345-359
NUMA node8 CPU(s): 120-134,360-374
NUMA node9 CPU(s): 135-149,375-389
NUMA node10 CPU(s): 150-164,390-404
NUMA node11 CPU(s): 165-179,405-419
NUMA node12 CPU(s): 180-194,420-434
NUMA node13 CPU(s): 195-209,435-449
NUMA node14 CPU(s): 210-224,450-464
NUMA node15 CPU(s): 225-239,465-479
Vulnerability Itlb multihit: Not affected
Vulnerability Llftf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0-14,240-254
node 0 size: 128626 MB
node 0 free: 127942 MB
node 1 cpus: 15-29,255-269
node 1 size: 129016 MB
node 1 free: 128831 MB
node 2 cpus: 30-44,270-284
node 2 size: 129016 MB
node 2 free: 128859 MB
node 3 cpus: 45-59,285-299
node 3 size: 129016 MB
node 3 free: 128873 MB
node 4 cpus: 60-74,300-314
node 4 size: 129016 MB
node 4 free: 128588 MB
node 5 cpus: 75-89,315-329
node 5 size: 129016 MB
node 5 free: 128682 MB
node 6 cpus: 90-104,330-344
node 6 size: 129016 MB
node 6 free: 128654 MB
node 7 cpus: 105-119,345-359
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H,
1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 7 size: 129016 MB
node 7 free: 128627 MB
node 8 cpus: 120-134,360-374
node 8 size: 129016 MB
node 8 free: 128654 MB
node 9 cpus: 135-149,375-389
node 9 size: 129016 MB
node 9 free: 128646 MB
node 10 cpus: 150-164,390-404
node 10 size: 129016 MB
node 10 free: 128621 MB
node 11 cpus: 165-179,405-419
node 11 size: 129016 MB
node 11 free: 128694 MB
node 12 cpus: 180-194,420-434
node 12 size: 129016 MB
node 12 free: 127969 MB
node 13 cpus: 195-209,435-449
node 13 size: 129016 MB
node 13 free: 128377 MB
node 14 cpus: 210-224,450-464
node 14 size: 129016 MB
node 14 free: 128450 MB
node 15 cpus: 225-239,465-479
node 15 size: 128933 MB
node 15 free: 128420 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31
  1: 12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31
  2: 12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31
  3: 12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31
  4: 21  21  21  21  10  12  12  31  31  31  31  31  21  21  21  21
  5: 21  21  21  21  12  10  12  31  31  31  31  31  21  21  21  21
  6: 21  21  21  21  12  12  10  12  31  31  31  31  31  21  21  21
  7: 21  21  21  21  12  12  12  10  31  31  31  31  31  21  21  21
  8: 21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21
  9: 21  21  21  21  31  31  31  31  31  12  10  12  12  21  21  21
 10: 21  21  21  21  31  31  31  31  31  12  12  10  12  21  21  21
 11: 21  21  21  21  31  31  31  31  12  12  12  12  10  21  21  21
 12: 31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12
 13: 31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12
 14: 31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12
 15: 31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  12
```

```
9. /proc/meminfo
MemTotal: 2113319908 kB
```

```
10. who -r
run-level 3 May 4 22:29
```

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user      degraded
```

```
12. Failed units, from systemctl list-units --state=failed
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
UNIT      LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

-----
13. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        audited cron@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd
                nvmefc-boot-connections postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked
                wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime    systemd-remount-fs
disabled       autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm grub2-once
                haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create
                multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect        wickedd

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f5d7bf41-1d73-4f7e-a75a-9dd867bc14ba
splash=silent
mitigations=auto
quiet
security=

-----
15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.50 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H,
1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvise [madvise] never
enabled [always] madvise never
hpae_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 1.5T 108G 1.4T 8% /

21. /sys/devices/virtual/dmi/id
Vendor: Cisco Systems Inc
Product: UCSX-410C-M7
Serial: FCH264873NP

22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
4x 0xAD00 HMCG94MEBRA121N 64 GB 2 rank 4800
28x 0xAD00 HMCG94MEBRA123N 64 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X410M7.5.1.1b.10.0424230829
BIOS Date: 04/24/2023
BIOS Revision: 5.29

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8490H, 1.90GHz)

SPECrate®2017_int_base = 1850

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-fno-math-errno -fno-rounding-math -funroll-loops -fno-optimize-sibling-calls  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-math-errno  
-fno-rounding-math -funroll-loops -fno-optimize-sibling-calls  
-fno-standard-realloc-lhs -falign array32byte -fno-align-of-unions  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.2023-05-23.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.2023-05-23.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-05 01:51:58-0400.

Report generated on 2024-01-29 17:44:50 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.