



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECrate®2017\_int\_base = 66.9**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3


**Test Date:** May-2023

**Test Sponsor:** HPE

**Hardware Availability:** Feb-2023

**Tested by:** HPE

**Software Availability:** Dec-2022

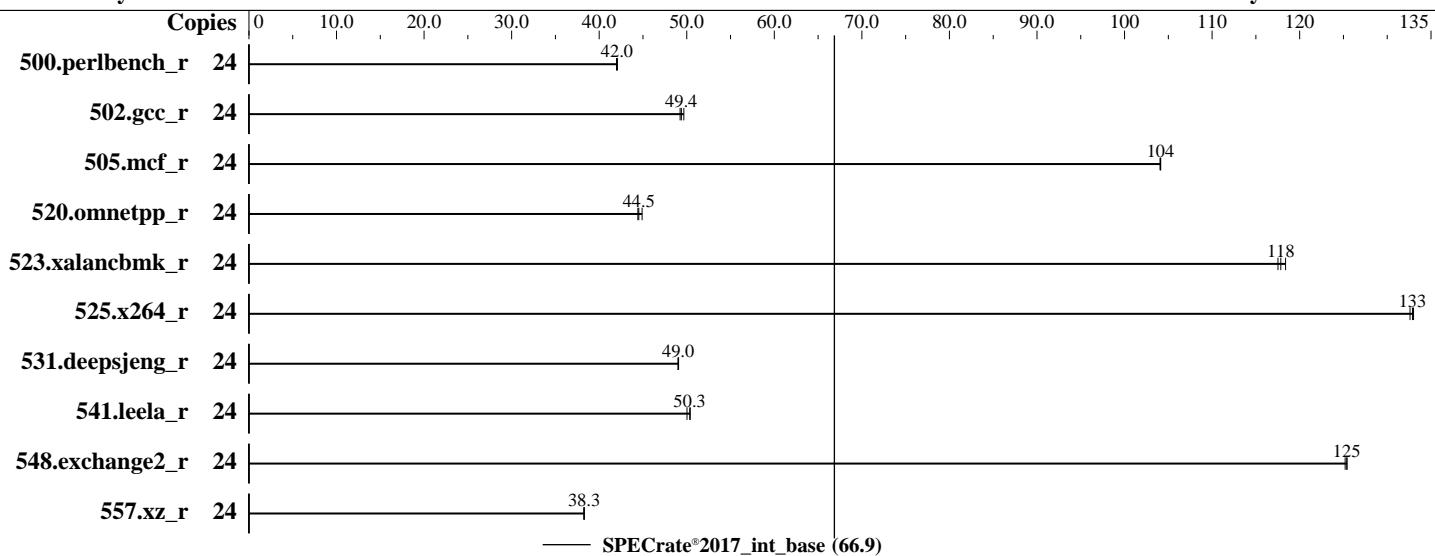

## Hardware

CPU Name: Intel Xeon E5-2620 v3  
 Max MHz: 3200  
 Nominal: 2400  
 Enabled: 12 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip (s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 15 MB I+D on chip per chip  
 Other: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 1866)  
 Storage: 1 x 300 GB SAS 15K HDD, RAID 0  
 Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Compiler: Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version P89 v3.08 01/12/2023 released Feb-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECrate®2017\_int\_base = 66.9**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	24	908	42.1	<b>909</b>	<b>42.0</b>	910	42.0							
502.gcc_r	24	684	49.7	<b>688</b>	<b>49.4</b>	690	49.2							
505.mcf_r	24	373	104	372	104	<b>373</b>	<b>104</b>							
520.omnetpp_r	24	701	44.9	709	44.4	<b>707</b>	<b>44.5</b>							
523.xalancbmk_r	24	<b>215</b>	<b>118</b>	214	118	216	118							
525.x264_r	24	317	133	<b>316</b>	<b>133</b>	316	133							
531.deepsjeng_r	24	561	49.0	561	49.1	<b>561</b>	<b>49.0</b>							
541.leela_r	24	<b>790</b>	<b>50.3</b>	789	50.4	794	50.0							
548.exchange2_r	24	<b>502</b>	<b>125</b>	502	125	501	125							
557.xz_r	24	678	38.2	677	38.3	<b>677</b>	<b>38.3</b>							

**SPECrate®2017\_int\_base = 66.9**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>. This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

This benchmark run is conducted using the latest binaries based on IC23 and to suffice the minimum software requirement, the Operating System used is RHEL9.0



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8480+ CPU + 512GB RAM  
memory using Red Hat Enterprise Linux 9.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x49 for  
the Intel Xeon E5-2620 v3 processor.

BIOS Configuration:

Power Profile set to Custom

Power Regulator to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6 State

Minimum Processor Idle Power Package C-State set to No Package State

QPI Snoop Configuration set to Cluster on Die

Thermal Configuration set to Maximum Cooling

Collaborative Power Control set to Disabled

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri May 5 11:00:10 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a

2. w

3. Username

4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

---

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

---

```
2. w
11:00:10 up 1 day, 13:09, 1 user, load average: 0.08, 0.13, 0.09
USER      TTY      LOGIN@      IDLE      JCPU      PCPU WHAT
root      pts/1      Thu10      9.00s    1.56s    0.00s -bash
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 514959
max locked memory         (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes         (-u) 514959
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

---

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
sshd: root [priv]
sshd: root@pts/1
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=24 -c
  ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=12 --define physicalfirst --define
  invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=24 --configfile
  ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=12 --define physicalfirst --define
  invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
  --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
vendor_id       : GenuineIntel
cpu family     : 6
model          : 63
stepping        : 2
microcode       : 0x49
bugs            : cpu_meltdown spectre_v1 spectre_v2 spec_store_bypass l1tf mds swapgs itlb_multihit
cpu cores       : 6
siblings        : 12
2 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-5
physical id 1: core ids 0-5
physical id 0: apicids 0-11
physical id 1: apicids 16-27
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 48 bits virtual
Byte Order:              Little Endian
CPU(s):                 24
On-line CPU(s) list:   0-23
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:             Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
BIOS Model name:        Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
CPU family:              6
Model:                  63
Thread(s) per core:    2
Core(s) per socket:    6
Socket(s):              2
Stepping:               2
BogoMIPS:                4794.38
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                        cpuid aperf mperf pnpi pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Date: May-2023

Test Sponsor: HPE

Hardware Availability: Feb-2023

Tested by: HPE

Software Availability: Dec-2022

## Platform Notes (Continued)

```
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm cpuid_fault ept
invpcid_single pt1 intel_ppin ssbd ibrs ibpb stibp tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmm1 avx2 smep bmi2 erms
invpcid cqm xsaveopt cqm_llc cqm_occup_llc dtherm ida arat pln pts
md_clear flush_lld
```

Virtualization:

VT-x

L1d cache:

384 KiB (12 instances)

L1i cache:

384 KiB (12 instances)

L2 cache:

3 MiB (12 instances)

L3 cache:

30 MiB (2 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

0-5,12-17

NUMA node1 CPU(s):

6-11,18-23

Vulnerability Itlb multihit:

KVM: Mitigation: VMX disabled

Vulnerability Lltf:

Mitigation: PTE Inversion; VMX conditional cache flushes, SMT vulnerable

Vulnerability Mds:

Mitigation: Clear CPU buffers; SMT vulnerable

Vulnerability Meltdown:

Mitigation: PTI

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Retpolines, IBPB conditional, IBRS\_FW, STIBP conditional, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	384K	8	Data	1	64	1	64
L1i	32K	384K	8	Instruction	1	64	1	64
L2	256K	3M	8	Unified	2	512	1	64
L3	15M	30M	20	Unified	3	12288	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-5,12-17

node 0 size: 64276 MB

node 0 free: 52502 MB

node 1 cpus: 6-11,18-23

node 1 size: 64500 MB

node 1 free: 62158 MB

node distances:

node 0 1

0: 10 21

1: 21 10

-----  
9. /proc/meminfo

MemTotal: 131867168 kB

-----  
10. who -r

run-level 3 May 3 21:50

-----  
11. Systemd service manager version: systemd 250 (250-6.e19\_0)

Default Target Status  
multi-user running

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited chronyd crond  
                  dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd  
                  rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled       canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot  
                  chrony-wait console-getty cpupower debug-shell hwloc-dump-hwdata ipsec kvm_stat  
                  man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmbuild  
                  serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext  
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
  
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64  
root=UUID=0a5a10b9-6311-479c-8337-4f762c2bf51d  
ro  
resume=UUID=fd01a7f2-3350-4c31-a1e2-fb7f69bf936d  
  
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes  
  
-----  
15. tuned-adm active  
Current active profile: throughput-performance  
  
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 40  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   10  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode            0  
  
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 xfs 297G 27G 270G 10% /home

21. /sys/devices/virtual/dmi/id  
Vendor: HP  
Product: ProLiant DL380 Gen9  
Product Family: ProLiant  
Serial: USE521R1JM

22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400, configured at 1866

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HP  
BIOS Version: P89  
BIOS Date: 01/12/2023  
BIOS Revision: 3.0  
Firmware Revision: 2.78

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECrate®2017\_int\_base = 66.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

-lqkmalloc

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-05 01:30:09-0400.

Report generated on 2024-01-29 17:47:56 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.