



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11
(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3


Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Jun-2023

Tested by: HPE

Software Availability: Dec-2022

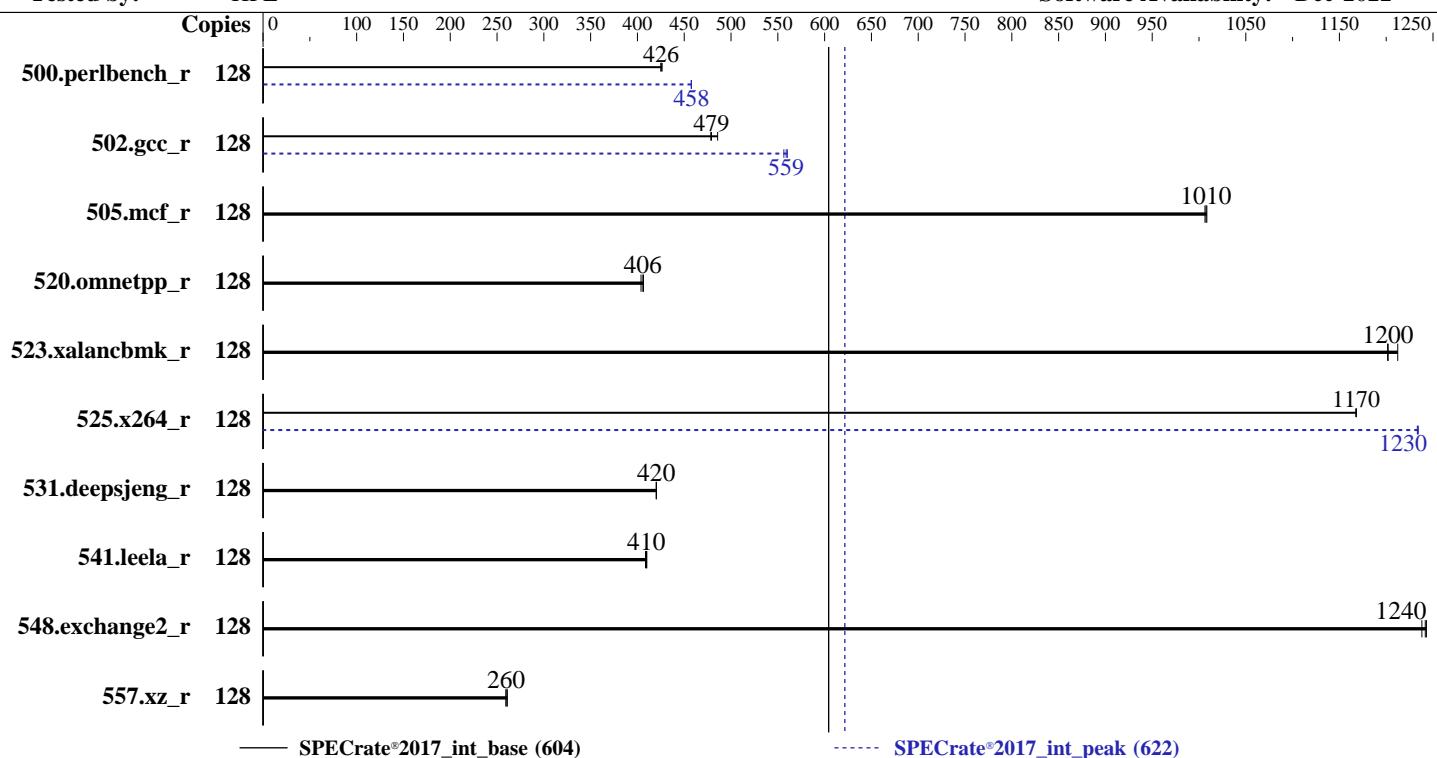

Hardware

CPU Name: Intel Xeon Max 9462
Max MHz: 3500
Nominal: 2700
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 75 MB I+D on chip per chip
Other: None
Memory: 640 GB (16 x 32 GB 2Rx8 PC5-4800B-R + 2 x 64 GB HBM)
Storage: 1 x 1.6 TB NVMe SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
Compiler: Kernel 5.14.0-70.13.1.el9_0.x86_64
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.40 05/18/2023 released Jun-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Jun-2023

Tested by: HPE

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	478	426	480	425	479	426	128	445	457	445	458	445	458	445	458
502.gcc_r	128	378	479	379	478	373	486	128	326	556	324	560	324	559	324	559
505.mcf_r	128	205	1010	205	1010	206	1010	128	205	1010	205	1010	206	1010	206	1010
520.omnetpp_r	128	413	406	416	404	414	406	128	413	406	416	404	414	406	414	406
523.xalancbmk_r	128	111	1210	112	1200	112	1200	128	111	1210	112	1200	112	1200	112	1200
525.x264_r	128	192	1170	192	1170	192	1170	128	182	1230	182	1230	182	1230	182	1230
531.deepsjeng_r	128	349	420	349	420	349	420	128	349	420	349	420	349	420	349	420
541.leela_r	128	519	409	517	410	517	410	128	519	409	517	410	517	410	517	410
548.exchange2_r	128	270	1240	271	1240	270	1240	128	270	1240	271	1240	270	1240	270	1240
557.xz_r	128	530	261	532	260	533	259	128	530	261	532	260	533	259	533	259

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2c000261 for
the Intel Xeon Max 9462 Processor

BIOS Configuration

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Jun 8 22:00:54 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
16. sysctl  
17. /sys/kernel/mm/transparent_hugepage  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS
```

```
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64  
x86_64 x86_64 GNU/Linux
```

```
2. w  
22:00:54 up 7 min, 2 users, load average: 0.00, 0.02, 0.00  
USER     TTY      LOGIN@    IDLE   JCPU   PCPU WHAT  
root     pts/0    21:54    6:29   0.00s  0.00s -bash  
root     pts/0    21:54   20.00s  1.28s  0.00s -bash
```

```
3. Username  
From environment variable $USER: root
```

```
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062698  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062698  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
```

```
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 18  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : Intel (R) Xeon (R) CPU Max 9462
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2c000261
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings         : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
```

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 128
On-line CPU(s) list:    0-127
Vendor ID:               GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:              Intel (R) Xeon (R) CPU Max 9462
BIOS Model name:        Intel (R) Xeon (R) CPU Max 9462
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:      32
Socket(s):              2
Stepping:                8
BogoMIPS:                5400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
                        nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                        cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                        avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsavec cqmq_llc cqmq_occur_llc cqmq_mbm_total
                        cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Jun-2023

Tested by: HPE

Software Availability: Dec-2022

Platform Notes (Continued)

```

bus_lock_detect clademote movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
3 MiB (64 instances)
L1d cache: 2 MiB (64 instances)
L1i cache: 128 MiB (64 instances)
L2 cache: 150 MiB (2 instances)
L3 cache: 8
NUMA node(s): 0-7,64-71
NUMA node0 CPU(s): 8-15,72-79
NUMA node1 CPU(s): 16-23,80-87
NUMA node2 CPU(s): 24-31,88-95
NUMA node3 CPU(s): 32-39,96-103
NUMA node4 CPU(s): 40-47,104-111
NUMA node5 CPU(s): 48-55,112-119
NUMA node6 CPU(s): 56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	75M	150M	15	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7,64-71

node 0 size: 64202 MB

node 0 free: 63717 MB

node 1 cpus: 8-15,72-79

node 1 size: 64508 MB

node 1 free: 64285 MB

node 2 cpus: 16-23,80-87

node 2 size: 64508 MB

node 2 free: 64308 MB

node 3 cpus: 24-31,88-95

node 3 size: 64508 MB

node 3 free: 64284 MB

node 4 cpus: 32-39,96-103

node 4 size: 64508 MB

node 4 free: 64280 MB

node 5 cpus: 40-47,104-111

node 5 size: 64508 MB

node 5 free: 64260 MB

node 6 cpus: 48-55,112-119

node 6 size: 64472 MB

node 6 free: 63917 MB

node 7 cpus: 56-63,120-127

node 7 size: 64497 MB

node 7 free: 64288 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
node distances:
node  0   1   2   3   4   5   6   7
 0: 10  17  17  17  26  26  26  26
 1: 17  10  17  17  26  26  26  26
 2: 17  17  10  17  26  26  26  26
 3: 17  17  17  10  26  26  26  26
 4: 26  26  26  26  10  17  17  17
 5: 26  26  26  26  17  10  17  17
 6: 26  26  26  26  17  17  10  17
 7: 26  26  26  26  17  17  17  10

-----
9. /proc/meminfo
MemTotal:      528091496 kB

-----
10. who -r
run-level 3 Jun 8 21:53

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond
                dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                systemd-network-generator tuned udisks2
enabled-runtime    systemd-remount-fs
disabled       blk-availability chrony-wait chronyd console-getty cpupower debug-shell kvm_stat
                man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmbuild-rebuild
                serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. tuned-adm active
Current active profile: throughput-performance

-----
16. sysctl
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness   20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag        always defer defer+madvise [madvise] never
    enabled       [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs  10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
    system-release  Red Hat Enterprise Linux release 9.0 (Plow)

-----
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem          Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.4T  160G  1.3T  12% /home

-----
21. /sys/devices/virtual/dmi/id
    Vendor:          HPE
    Product:         ProLiant DL380a Gen11
    Product Family:  ProLiant
    Serial:          CNX22602MZ

-----
22. dmidecode
    Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
7x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
6x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800
3x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 1.40
BIOS Date: 05/18/2023
BIOS Revision: 1.40
Firmware Revision: 1.30
```

Compiler Version Notes

=====

```
C | 502.gcc_r(peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

```
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

```
C | 502.gcc_r(peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

```
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

```
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-fno-math-errno -funroll-loops -fno-optimize-sibling-calls
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-fno-math-errno -funroll-loops -fno-optimize-sibling-calls
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-finite-math-only  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

502.gcc_r: -m32

```
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECrate®2017_int_base = 604

SPECrate®2017_int_peak = 622

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-08 12:30:53-0400.

Report generated on 2024-01-29 17:54:01 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-04.