



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

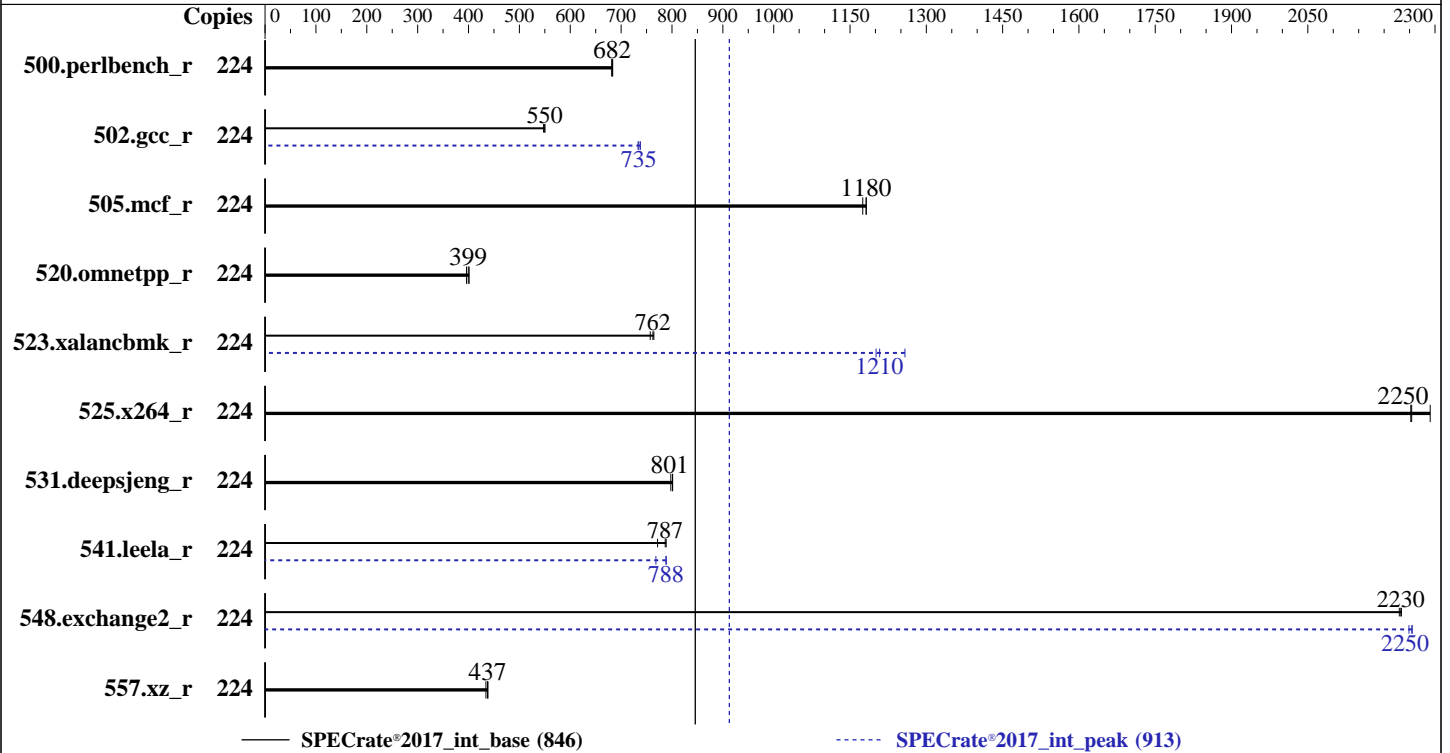

Hardware

CPU Name: AMD EPYC 9734
 Max MHz: 3000
 Nominal: 2200
 Enabled: 112 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 7 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version v1.30 03/06/2023 released
 Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	523	681	<u>523</u>	<u>682</u>	522	683	224	523	681	<u>523</u>	<u>682</u>	522	683
502.gcc_r	224	579	548	<u>577</u>	<u>550</u>	577	550	224	430	738	433	733	<u>432</u>	<u>735</u>
505.mcf_r	224	<u>306</u>	<u>1180</u>	308	1180	306	1180	224	<u>306</u>	<u>1180</u>	308	1180	306	1180
520.omnetpp_r	224	<u>736</u>	<u>399</u>	732	401	742	396	224	<u>736</u>	<u>399</u>	732	401	742	396
523.xalancbmk_r	224	309	764	312	757	<u>310</u>	<u>762</u>	224	188	1260	<u>196</u>	<u>1210</u>	197	1200
525.x264_r	224	<u>174</u>	<u>2250</u>	174	2250	171	2290	224	<u>174</u>	<u>2250</u>	174	2250	171	2290
531.deepsjeng_r	224	<u>321</u>	<u>801</u>	322	798	320	801	224	<u>321</u>	<u>801</u>	322	798	320	801
541.leela_r	224	470	789	481	772	<u>472</u>	<u>787</u>	224	483	768	<u>471</u>	<u>788</u>	470	789
548.exchange2_r	224	263	2230	263	2230	<u>263</u>	<u>2230</u>	224	260	2260	261	2250	<u>260</u>	<u>2250</u>
557.xz_r	224	<u>553</u>	<u>437</u>	557	434	552	438	224	<u>553</u>	<u>437</u>	557	434	552	438

SPECrate®2017_int_base = **846**

SPECrate®2017_int_peak = **913**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017new/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017new/amd_rate_aocc400_znver4_A_lib/lib
32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017new/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Fri Jul 7 19:46:37 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
19:46:37 up 2 min, 1 user, load average: 0.06, 0.05, 0.02
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      pts/0    19:45   13.00s  1.22s  0.05s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094580
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3094580
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017new
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9734 112-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 112
siblings      : 224
1 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids
0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94,96-102,104-110,112-118,120-126
physical id 0: apicids
0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189,192-205,208-221,224-237
,240-253

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 224
On-line CPU(s) list:   0-223
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9734 112-Core Processor
BIOS Model name:       AMD EPYC 9734 112-Core Processor
CPU family:             25
Model:                  160
Thread(s) per core:    2
Core(s) per socket:    112
Socket(s):              1
Stepping:               2
Frequency boost:        enabled
CPU max MHz:            2200.0000
CPU min MHz:            1500.0000
BogoMIPS:               4392.95
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
AMD-V

```

Virtualization:
L1d cache:      3.5 MiB (112 instances)
L1i cache:      3.5 MiB (112 instances)
L2 cache:       112 MiB (112 instances)
L3 cache:       256 MiB (16 instances)
NUMA node(s):   16
NUMA node0 CPU(s): 0-6,112-118
NUMA node1 CPU(s): 7-13,119-125
NUMA node2 CPU(s): 56-62,168-174
NUMA node3 CPU(s): 63-69,175-181
NUMA node4 CPU(s): 28-34,140-146
NUMA node5 CPU(s): 35-41,147-153
NUMA node6 CPU(s): 84-90,196-202
NUMA node7 CPU(s): 91-97,203-209
NUMA node8 CPU(s): 42-48,154-160
NUMA node9 CPU(s): 49-55,161-167
NUMA node10 CPU(s): 98-104,210-216
NUMA node11 CPU(s): 105-111,217-223
NUMA node12 CPU(s): 14-20,126-132
NUMA node13 CPU(s): 21-27,133-139
NUMA node14 CPU(s): 70-76,182-188
NUMA node15 CPU(s): 77-83,189-195
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3.5M	8	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	1M	112M	8	Unified	2	2048	1	64
L3	16M	256M	16	Unified	3	16384	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-6,112-118
node 0 size: 48134 MB
node 0 free: 47863 MB
node 1 cpus: 7-13,119-125
node 1 size: 48344 MB
node 1 free: 47804 MB
node 2 cpus: 56-62,168-174
node 2 size: 48380 MB
node 2 free: 48098 MB
node 3 cpus: 63-69,175-181
node 3 size: 48380 MB
node 3 free: 48111 MB
node 4 cpus: 28-34,140-146
node 4 size: 48380 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```

node 4 free: 48212 MB
node 5 cpus: 35-41,147-153
node 5 size: 48380 MB
node 5 free: 48254 MB
node 6 cpus: 84-90,196-202
node 6 size: 48380 MB
node 6 free: 48237 MB
node 7 cpus: 91-97,203-209
node 7 size: 48380 MB
node 7 free: 48168 MB
node 8 cpus: 42-48,154-160
node 8 size: 48380 MB
node 8 free: 48226 MB
node 9 cpus: 49-55,161-167
node 9 size: 48380 MB
node 9 free: 48227 MB
node 10 cpus: 98-104,210-216
node 10 size: 48380 MB
node 10 free: 48183 MB
node 11 cpus: 105-111,217-223
node 11 size: 48380 MB
node 11 free: 48170 MB
node 12 cpus: 14-20,126-132
node 12 size: 48380 MB
node 12 free: 48105 MB
node 13 cpus: 21-27,133-139
node 13 size: 48380 MB
node 13 free: 47722 MB
node 14 cpus: 70-76,182-188
node 14 size: 48380 MB
node 14 free: 48010 MB
node 15 cpus: 77-83,189-195
node 15 size: 48318 MB
node 15 free: 48019 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12
1:  11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12
2:  11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12
3:  11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12
4:  12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12
5:  12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12
6:  12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12
7:  12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12
8:  12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12
9:  12 12 12 12 12 12 12 12 11 10 11 11 12 12 12 12
10: 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12 12
11: 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 12
12: 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11
13: 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11
14: 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11
15: 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:      792319356 kB

```

```

-----
10. who -r
    run-level 3 Jul 7 19:44

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-network-generator udisks2 upower
systemd-remount-fs
enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell
hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables rdisc rhsm
rhsm-facts rpmdm-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysexit
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.20 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2200MHz

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017new
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 120G 699G 15% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL325 Gen11
Product Family: ProLiant
Serial: DL325G11-010
```

```
-----
21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
10x Hynix HMC94AEBRA103N 64 GB 2 rank 4800
2x Hynix HMC94MEBRA121N 64 GB 2 rank 4800
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.30
BIOS Date: 03/06/2023
BIOS Revision: 1.30
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Platform Notes (Continued)

Firmware Revision: 1.40

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Compiler Version Notes (Continued)

=====
C++ | 523.xalancbmk_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4

-fveclib=AMDLIBM -ffast-math -fstruct-layout=7

-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_int_base = 846

SPECrate®2017_int_peak = 913

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-07 10:16:37-0400.

Report generated on 2023-08-02 16:27:52 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.