



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066


Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

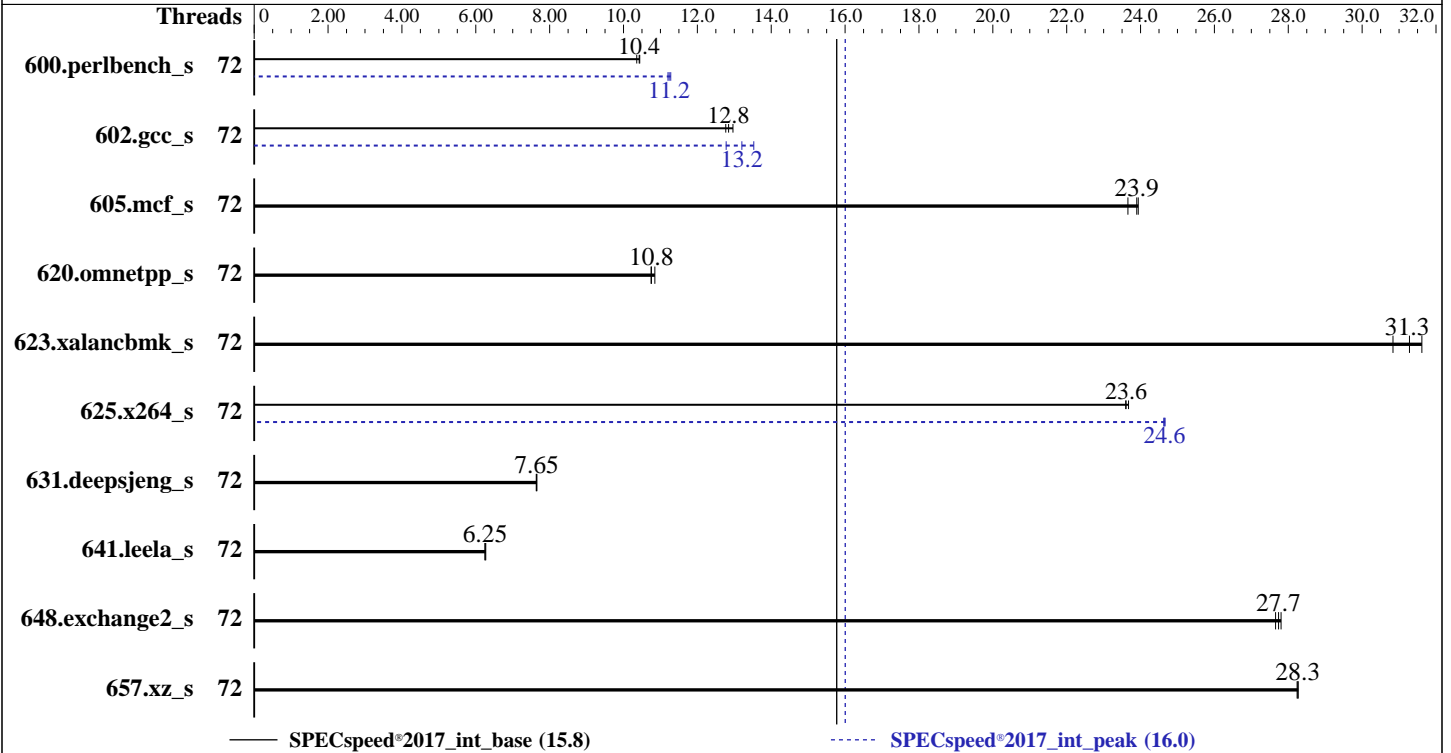

Hardware

CPU Name: Intel Xeon Gold 6416H
 Max MHz: 4200
 Nominal: 2200
 Enabled: 72 cores, 4 chips
 Orderable: 1,2,3,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 7.68 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 5.29 released Jun-2023 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	72	170	10.4	171	10.4	170	10.4	72	158	11.2	157	11.3	158	11.2
602.gcc_s	72	310	12.8	312	12.8	307	13.0	72	294	13.5	302	13.2	312	12.8
605.mcf_s	72	200	23.7	198	23.9	197	23.9	72	200	23.7	198	23.9	197	23.9
620.omnetpp_s	72	152	10.8	152	10.7	150	10.8	72	152	10.8	152	10.7	150	10.8
623.xalancbmk_s	72	45.3	31.3	46.0	30.8	44.8	31.6	72	45.3	31.3	46.0	30.8	44.8	31.6
625.x264_s	72	74.8	23.6	74.7	23.6	74.5	23.7	72	71.6	24.6	71.5	24.7	71.6	24.6
631.deepsjeng_s	72	188	7.64	187	7.65	187	7.65	72	188	7.64	187	7.65	187	7.65
641.leela_s	72	273	6.25	273	6.25	272	6.27	72	273	6.25	273	6.25	272	6.27
648.exchange2_s	72	106	27.7	106	27.7	106	27.8	72	106	27.7	106	27.7	106	27.8
657.xz_s	72	219	28.3	219	28.3	219	28.2	72	219	28.3	219	28.3	219	28.2

SPECspeed®2017_int_base = **15.8**

SPECspeed®2017_int_peak = **16.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Set Enable LP [Global] to Single LP

Set Patrol Scrub to Disabled

Set Power Performance Tuning to BIOS Controls EFB

Set ENERGY_PERF_BIAS_CFG_mode to Performance

Set LLC Prefetch to Disabled

Set FB Thread Slicing to Enabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Tue Jul 25 13:34:00 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 250 (250-6.el9_0)
11. Failed units, from systemctl list-units --state=failed
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

x86_64 x86_64 GNU/Linux

```

-----
2. w
 13:34:00 up 21:03,  2 users,  load average: 0.06, 0.03, 0.06
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1     Mon16   16.00s 0.79s  0.00s -bash
root      pts/0   10:43   1:36   0.03s  0.03s -bash

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 4124499
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 4124499
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=72 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=72 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.039/templogs/preenv.intspeed.039.0.log
--lognum 039.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6416H
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 7
microcode      : 0x2b000181
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 18

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```

siblings          : 18
4 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-17
physical id 1: core ids 0-17
physical id 2: core ids 0-17
physical id 3: core ids 0-17
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162
physical id 2: apicids 256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290
physical id 3: apicids 384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                72
On-line CPU(s) list:  0-71
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6416H
BIOS Model name:      Intel(R) Xeon(R) Gold 6416H
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   18
Socket(s):             4
Stepping:              7
CPU max MHz:           4200.0000
CPU min MHz:           800.0000
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3.4 MiB (72 instances)
L1i cache:             2.3 MiB (72 instances)
L2 cache:              144 MiB (72 instances)
L3 cache:              180 MiB (4 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node(s): 4
NUMA node0 CPU(s): 0-17
NUMA node1 CPU(s): 18-35
NUMA node2 CPU(s): 36-53
NUMA node3 CPU(s): 54-71
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	45M	180M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-17
node 0 size: 257101 MB
node 0 free: 255789 MB
node 1 cpus: 18-35
node 1 size: 258043 MB
node 1 free: 257378 MB
node 2 cpus: 36-53
node 2 size: 258043 MB
node 2 free: 247829 MB
node 3 cpus: 54-71
node 3 size: 257996 MB
node 3 free: 256734 MB
node distances:
node  0  1  2  3
 0:  10  21  21  21
 1:  21  10  21  21
 2:  21  21  10  21
 3:  21  21  21  10

```

9. /proc/meminfo

MemTotal: 1055934896 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 250 (250-6.el9_0)

```

Default Target Status
multi-user starting

```

11. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD ACTIVE SUB    DESCRIPTION
* pmlogger_daily.service loaded failed failed Process archive logs

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd switcheroo-control sysstat systemd-network-generator tuned udisks2 upower vgauthd virtqemu vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brlty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-nsd systemd-pstore systemd-sysext target targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodevd virtnwfilterd virtproxyd virtsecret virtstoraged vsftpd wpa_supplicant
indirect	pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd virtlogd vsftpd@

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   7.0T  231G  6.7T   4% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Product Family: Rack

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  30x Micron MTC20F2085S1RC48BA1 32 GB 2 rank 4800
  1x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

1x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.00.23
BIOS Date: 06/20/2023
BIOS Revision: 5.29

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 15.8

H3C UniServer R6700 G6 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = 16.0

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-25 01:34:00-0400.

Report generated on 2024-01-29 18:01:08 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.