



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion


SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

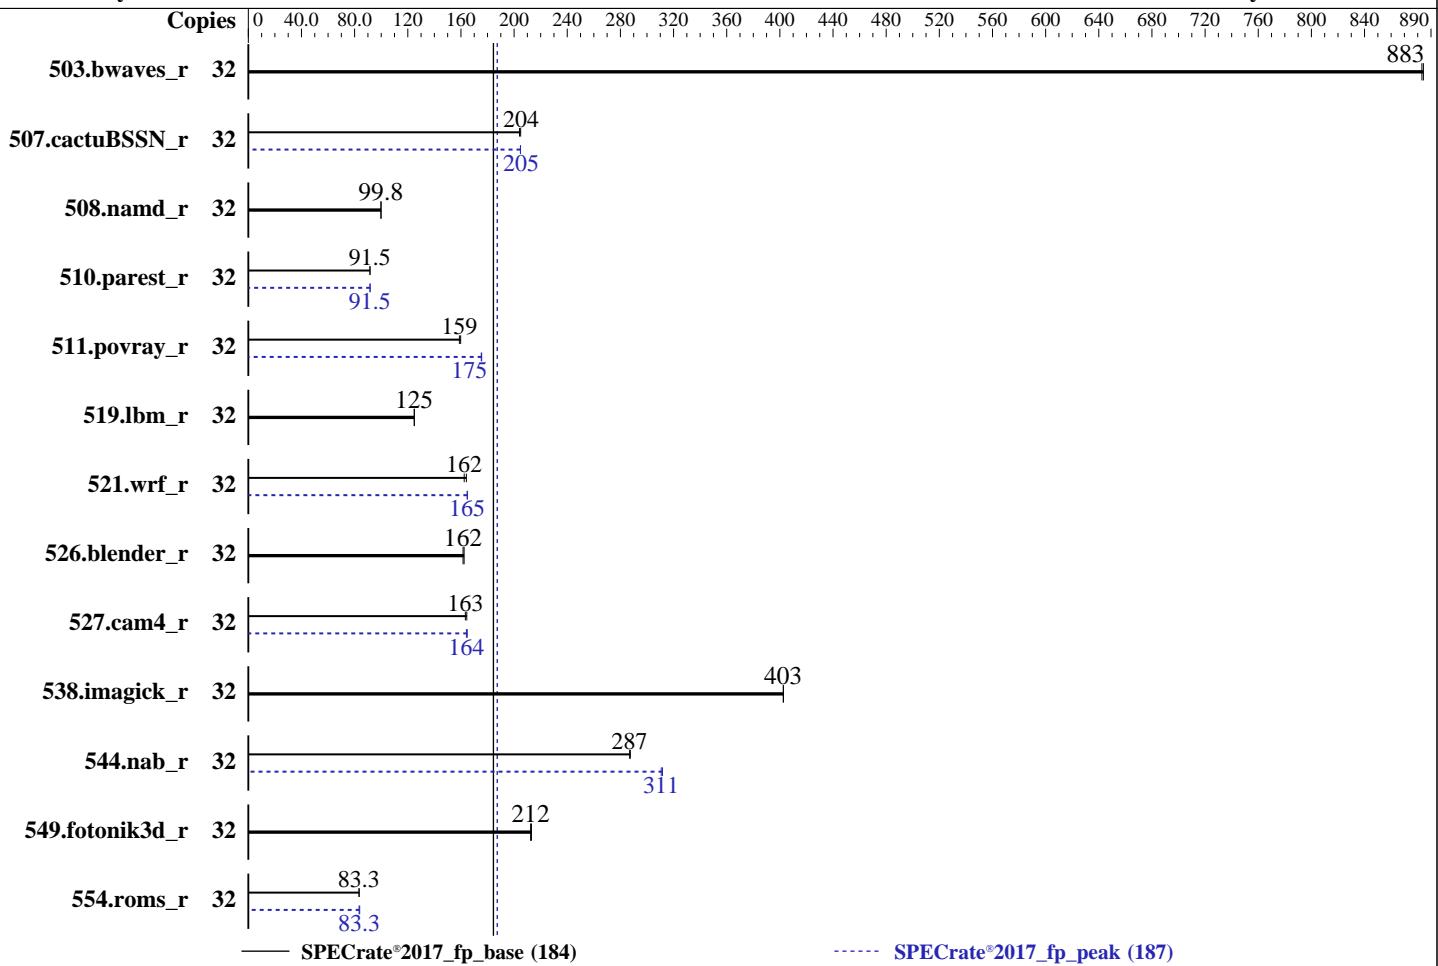

— SPECrate®2017_fp_base (184)

----- SPECrate®2017_fp_peak (187)

Hardware

CPU Name: Intel Xeon Silver 4309Y
 Max MHz: 3600
 Nominal: 2800
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

OS:

Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64

Compiler:

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

Parallel:

No

Firmware:

Version 1.55 Released May-2023

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<u>363</u>	<u>883</u>	363	884			32	<u>363</u>	<u>883</u>	363	884				
507.cactusBSSN_r	32	198	205	<u>199</u>	<u>204</u>			32	198	205	<u>198</u>	<u>205</u>				
508.namd_r	32	304	99.9	<u>305</u>	<u>99.8</u>			32	304	99.9	<u>305</u>	<u>99.8</u>				
510.parest_r	32	<u>915</u>	<u>91.5</u>	914	91.6			32	<u>914</u>	<u>91.5</u>	913	91.7				
511.povray_r	32	<u>470</u>	<u>159</u>	468	160			32	<u>425</u>	<u>176</u>	<u>426</u>	<u>175</u>				
519.lbm_r	32	<u>270</u>	<u>125</u>	270	125			32	<u>270</u>	<u>125</u>	270	125				
521.wrf_r	32	437	164	<u>441</u>	<u>162</u>			32	435	165	<u>435</u>	<u>165</u>				
526.blender_r	32	<u>302</u>	<u>162</u>	300	162			32	<u>302</u>	<u>162</u>	300	162				
527.cam4_r	32	<u>343</u>	<u>163</u>	340	164			32	340	165	<u>341</u>	<u>164</u>				
538.imagick_r	32	198	403	<u>198</u>	<u>403</u>			32	198	403	<u>198</u>	<u>403</u>				
544.nab_r	32	187	287	<u>188</u>	<u>287</u>			32	173	312	<u>173</u>	<u>311</u>				
549.fotonik3d_r	32	<u>587</u>	<u>212</u>	585	213			32	<u>587</u>	<u>212</u>	585	213				
554.roms_r	32	610	83.4	<u>611</u>	<u>83.3</u>			32	607	83.8	<u>610</u>	<u>83.3</u>				

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Performance
SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Jul 4 14:13:14 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-45.el8)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
-

1. uname -a
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86_64 x86_64 x86_64
GNU/Linux

2. w
14:13:14 up 3:05, 2 users, load average: 22.95, 29.76, 31.10
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttys1 - 11:11 3:01m 1.23s 0.01s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Platform Notes (Continued)

```
root      pts/0      70.167.0.2      11:10      3:01m  0.01s  0.01s -bash
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
core file size          (blocks, -c) 0  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 2060598  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 2060598  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 18  
login -- root  
-bash  
-bash  
runcpu --define default-platform-flags --copies 32 -c ic2023.0-lin-core-avx512-rate-20221201.cfg --define  
smt-on --define cores=16 --define physicalfirst --define invoke_with_interleave --define drop_caches  
--tune base,peak --iterations 2 -o all fprate  
runcpu --define default-platform-flags --copies 32 --configfile ic2023.0-lin-core-avx512-rate-20221201.cfg  
--define smt-on --define cores=16 --define physicalfirst --define invoke_with_interleave --define  
drop_caches --tune base,peak --iterations 2 --output_format all --nopower --runmode rate --tune base:peak  
--size reffrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.068/templogs/preenv.fprate.068.0.log --lognum 068.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /spec2017-icc2023.0
```

```
-----  
6. /proc/cpuinfo  
model name          : Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz  
vendor_id           : GenuineIntel  
cpu family          : 6  
model               : 106  
stepping             : 6  
microcode            : 0xd000363  
bugs                : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores            : 8  
siblings              : 16  
2 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0-7  
physical id 1: core ids 0-7  
physical id 0: apicids 0-15  
physical id 1: apicids 64-79
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
CPU family:             6
Model:                 106
Model name:             Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
BIOS Model name:        Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
Stepping:               6
CPU MHz:                3400.000
BogoMIPS:               5600.00
Virtualization:         VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:                1280K
L3 cache:                12288K
NUMA node0 CPU(s):      0-7,16-23
NUMA node1 CPU(s):      8-15,24-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                        acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                        arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperfmpfperf pn
                        pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_13 invpcid_single ssbd mba ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow vnmi flexpriority ept_vpid ept_ad fsgsbase tsc_adjust bmi1
                        hle avx2 smep bmi2 erms invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local split_lock_detect wbnoinvd
                        dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
                        pconfig flush_l1d arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 257181 MB
node 0 free: 251088 MB
node 1 cpus: 8-15,24-31
node 1 size: 258004 MB
node 1 free: 253724 MB
node distances:
node    0    1
  0: 10  20
  1: 20  10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Platform Notes (Continued)

9. /proc/meminfo
MemTotal: 527550576 kB

10. who -r
run-level 3 Jul 4 11:08

11. Systemd service manager version: systemd 239 (239-45.el8)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd audited autovt@ chronyd
crond firewalld getty@ import-state irgbalance iscsi iscsi-onboot kdump libstoragemgmt
loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog
sysstat timedate tuned udisks2 vdo
disabled arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebtables iprdump
iprinit iprule update ipsec iscsid iscsiuio kpatch kvm_stat ledmon nftables nvmf-autoconnect oddjobd
psacct rdisc rhcd rhsm rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcscd
generated SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-4.18.0-305.el8.x86_64
root=UUID=711de346-1631-4b60-a626-37488271d525
ro
crashkernel=auto
resume=UUID=d6a3ac10-1eal-4e42-a80b-54c427bcad19
rhgb
quiet

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
No current active profile.

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 0
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag      1
    max_ptes_none        511
    max_ptes_swap        64
    pages_to_scan        4096
    scan_sleep_millisecs 10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release  Red Hat Enterprise Linux 8.4 (Ootpa)
    redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)
    system-release Red Hat Enterprise Linux release 8.4 (Ootpa)

-----
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
    itlb_multihit  Not affected
    l1tf          Not affected
    mds          Not affected
    meltdown     Not affected
    spec_store_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp
    spectre_v1    Mitigation: usercopy/swapgs barriers and __user pointer sanitization
    spectre_v2    Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
    srbds         Not affected
    tsx_async_abort Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example
    https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

-----
21. Disk information
SPEC is set to: /spec2017-icc2023.0
Filesystem  Type  Size  Used  Avail Use% Mounted on
/dev/sda3    xfs   420G  57G  363G  14%  /
```

```
22. /sys/devices/virtual/dmi/id
    Vendor:      XFUSION
    Product:     2288H V6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Platform Notes (Continued)

Product Family: Whitley
Serial: Serial

23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2666

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION
BIOS Version: 1.55
BIOS Date: 05/09/2023
BIOS Revision: 1.55

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

CPU2017 License: 6488

Test Date: Jul-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

Test Date: Jul-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

510.parest_r (continued):

```
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 184

SPECrate®2017_fp_peak = 187

CPU2017 License: 6488

Test Date: Jul-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-04 14:13:14-0400.

Report generated on 2023-08-18 11:03:07 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-18.