



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Aug-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

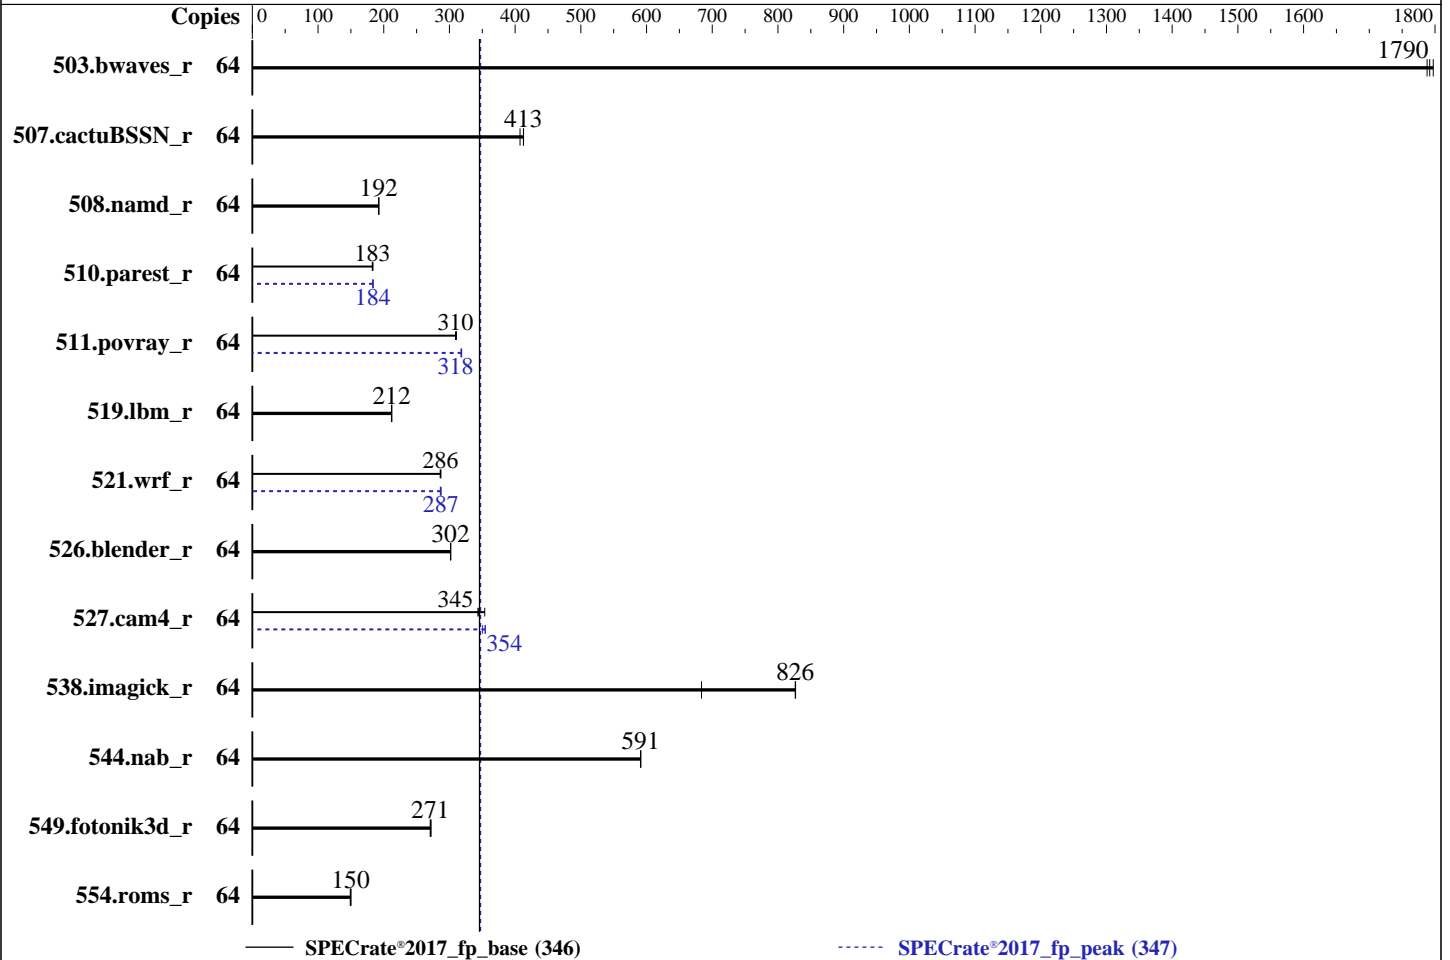

Hardware

CPU Name: Intel Xeon Gold 6414U
 Max MHz: 3400
 Nominal: 2000
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 2.00.55 Released Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	357	1800	<u>358</u>	<u>1790</u>	359	1790	64	357	1800	<u>358</u>	<u>1790</u>	359	1790
507.cactuBSSN_r	64	<u>196</u>	<u>413</u>	196	413	199	407	64	<u>196</u>	<u>413</u>	196	413	199	407
508.namd_r	64	316	192	<u>316</u>	<u>192</u>	316	192	64	316	192	<u>316</u>	<u>192</u>	316	192
510.parest_r	64	917	183	<u>914</u>	<u>183</u>	912	184	64	<u>912</u>	<u>184</u>	912	184	911	184
511.povray_r	64	<u>481</u>	<u>310</u>	483	309	481	311	64	469	319	<u>470</u>	<u>318</u>	470	318
519.lbm_r	64	319	212	318	212	<u>318</u>	<u>212</u>	64	319	212	318	212	<u>318</u>	<u>212</u>
521.wrf_r	64	499	287	<u>501</u>	<u>286</u>	501	286	64	499	287	501	286	<u>500</u>	<u>287</u>
526.blender_r	64	<u>323</u>	<u>302</u>	323	302	323	302	64	<u>323</u>	<u>302</u>	323	302	323	302
527.cam4_r	64	326	343	<u>325</u>	<u>345</u>	316	354	64	319	351	<u>316</u>	<u>354</u>	316	355
538.imagick_r	64	193	827	<u>193</u>	<u>826</u>	233	684	64	193	827	<u>193</u>	<u>826</u>	233	684
544.nab_r	64	182	591	182	591	<u>182</u>	<u>591</u>	64	182	591	182	591	<u>182</u>	<u>591</u>
549.fotonik3d_r	64	<u>920</u>	<u>271</u>	917	272	921	271	64	<u>920</u>	<u>271</u>	917	272	921	271
554.roms_r	64	<u>679</u>	<u>150</u>	677	150	682	149	64	<u>679</u>	<u>150</u>	677	150	682	149

SPECrate®2017_fp_base = **346**

SPECrate®2017_fp_peak = **347**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2017-1.1.9-ic2023/lib/intel64:/home/spec2017-1.1.9-ic2023/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/spec2017-1.1.9-ic2023/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Aug 9 22:41:00 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
22:41:00 up 6:30, 1 user, load average: 16.71, 48.55, 58.07
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 16:19 6:21m 1.35s 0.07s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
3. Username
   From environment variable $USER:  root

-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority         (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals            (-i) 1028033
   max locked memory          (kbytes, -l) 64
   max memory size            (kbytes, -m) unlimited
   open files                  (-n) 1024
   pipe size                   (512 bytes, -p) 8
   POSIX message queues       (bytes, -q) 819200
   real-time priority         (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                    (seconds, -t) unlimited
   max user processes         (-u) 1028033
   virtual memory              (kbytes, -v) unlimited
   file locks                  (-x) unlimited

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   runcpu --define default-platform-flags --copies 64 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
     smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches
     --tune base,peak --iterations 3 -o all fprate
   runcpu --define default-platform-flags --copies 64 --configfile
     ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3 --output_format all
     --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
     $$SPEC/tmp/CPU2017.202/templogs/preenv.fprate.202.0.log --lognum 202.0 --from_runcpu 2
   specperl $$SPEC/bin/sysinfo
   $SPEC = /home/spec2017-1.1.9-ic2023

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 6414U
   vendor_id      : GenuineIntel
   cpu family      : 6
   model          : 143
   stepping       : 8
   microcode      : 0x2b000111
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores      : 32
   siblings       : 64
   1 physical ids (chips)
   64 processors (hardware threads)
   physical id 0: core ids 0-31
   physical id 0: apicids 0-63
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):      32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               64
On-line CPU(s) list: 0-63
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
Model name:           Intel(R) Xeon(R) Gold 6414U
BIOS Model name:     Intel(R) Xeon(R) Gold 6414U
CPU family:           6
Model:                143
Thread(s) per core:  2
Core(s) per socket:  32
Socket(s):            1
Stepping:             8
BogoMIPS:             4000.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                    vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                    flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                    invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                    clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                    avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                    ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                    amx_tile flush_l1d arch_capabilities
Virtualization:       VT-x
L1d cache:           1.5 MiB (32 instances)
L1i cache:           1 MiB (32 instances)
L2 cache:            64 MiB (32 instances)
L3 cache:            60 MiB (1 instance)
NUMA node(s):        4
NUMA node0 CPU(s):  0-7,32-39
NUMA node1 CPU(s):  8-15,40-47
NUMA node2 CPU(s):  16-23,48-55
NUMA node3 CPU(s):  24-31,56-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:  Not affected
Vulnerability Mds:   Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:  Not affected
Vulnerability Tsx async abort: Not affected

```

Virtualization:

```

L1d cache:           1.5 MiB (32 instances)
L1i cache:           1 MiB (32 instances)
L2 cache:            64 MiB (32 instances)
L3 cache:            60 MiB (1 instance)
NUMA node(s):        4
NUMA node0 CPU(s):  0-7,32-39
NUMA node1 CPU(s):  8-15,40-47
NUMA node2 CPU(s):  16-23,48-55
NUMA node3 CPU(s):  24-31,56-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:  Not affected
Vulnerability Mds:   Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:  Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

```

NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

L1d	48K	1.5M	12 Data	1	64	1	64
L1i	32K	1M	8 Instruction	1	64	1	64
L2	2M	64M	16 Unified	2	2048	1	64
L3	60M	60M	15 Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 63570 MB
node 0 free: 54117 MB
node 1 cpus: 8-15,40-47
node 1 size: 64508 MB
node 1 free: 57072 MB
node 2 cpus: 16-23,48-55
node 2 size: 64508 MB
node 2 free: 56988 MB
node 3 cpus: 24-31,56-63
node 3 size: 64461 MB
node 3 free: 57015 MB
node distances:
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10

```

9. /proc/meminfo

MemTotal: 263217632 kB

10. who -r

run-level 3 Aug 9 16:10

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                dbus-broker getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname
                rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd sysstat
                systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell firewallld
                kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild
                serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

16. tuned-adm active
  Current active profile: throughput-performance

```

```

17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

```
-----
21. Disk information
SPEC is set to: /home/spec2017-1.1.9-ic2023
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.7T  126G  1.6T   8% /home
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         2288H V7
Product Family:  Eagle Stream
Serial:          serial
-----
```

```
-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800
-----
```

```
-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:     XFUSION
BIOS Version:    2.00.55
BIOS Date:       03/07/2023
BIOS Revision:   0.55
-----
```

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Aug-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljmalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljmalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljmalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 346

FusionServer 2288H V7 (Intel Xeon Gold 6414U)

SPECrate®2017_fp_peak = 347

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Aug-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-09 10:40:59-0400.

Report generated on 2023-08-30 09:40:01 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.