



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470, 2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019


Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

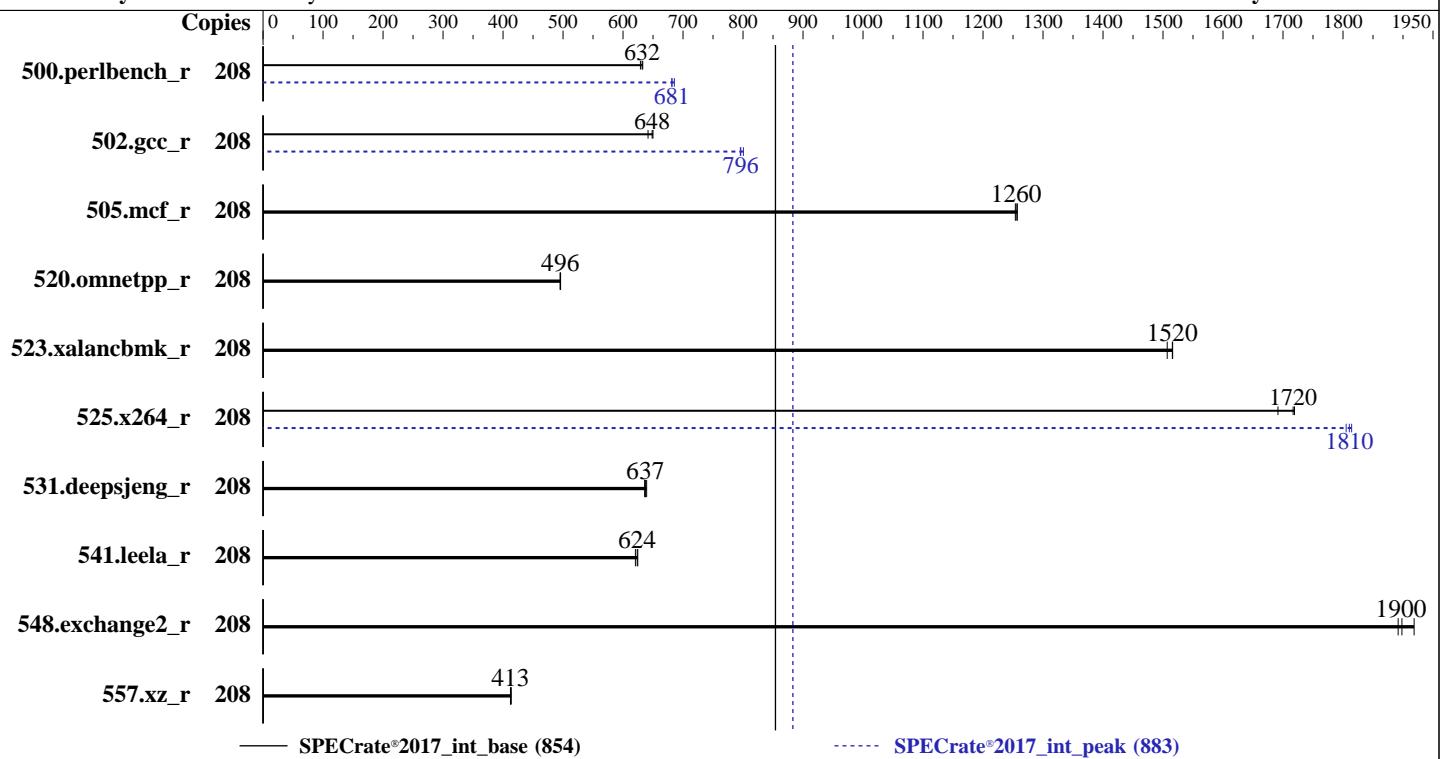

Hardware

CPU Name: Intel Xeon Platinum 8470
 Max MHz: 3800
 Nominal: 2000
 Enabled: 104 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 240 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 4.3.2a released Jul-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470, 2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-----------------|--------|------------|------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 208 | 523 | 633 | 524 | 632 | 526 | 629 | 208 | 486 | 681 | 486 | 681 | 483 | 685 | | |
| 502.gcc_r | 208 | 453 | 650 | 454 | 648 | 459 | 642 | 208 | 368 | 801 | 370 | 796 | 370 | 795 | | |
| 505.mcf_r | 208 | 268 | 1250 | 267 | 1260 | 268 | 1260 | 208 | 268 | 1250 | 267 | 1260 | 268 | 1260 | | |
| 520.omnetpp_r | 208 | 551 | 495 | 550 | 496 | 551 | 496 | 208 | 551 | 495 | 550 | 496 | 551 | 496 | | |
| 523.xalancbmk_r | 208 | 146 | 1510 | 145 | 1520 | 145 | 1520 | 208 | 146 | 1510 | 145 | 1520 | 145 | 1520 | | |
| 525.x264_r | 208 | 215 | 1690 | 212 | 1720 | 212 | 1720 | 208 | 201 | 1810 | 201 | 1810 | 202 | 1810 | | |
| 531.deepsjeng_r | 208 | 375 | 636 | 374 | 637 | 373 | 639 | 208 | 375 | 636 | 374 | 637 | 373 | 639 | | |
| 541.leela_r | 208 | 552 | 624 | 555 | 621 | 552 | 625 | 208 | 552 | 624 | 555 | 621 | 552 | 625 | | |
| 548.exchange2_r | 208 | 284 | 1920 | 288 | 1890 | 287 | 1900 | 208 | 284 | 1920 | 288 | 1890 | 287 | 1900 | | |
| 557.xz_r | 208 | 543 | 414 | 545 | 413 | 545 | 412 | 208 | 543 | 414 | 545 | 413 | 545 | 412 | | |

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Enabled

DCU Streamer Prefetch set to Enabled

Enhanced CPU Performance set to Auto

LLC Dead Line set to Disabled

ADDDC Sparsing set to Disabled

Processor C6 Report set to Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Aug  8 03:21:57 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
03:21:57 up 5 min, 1 user, load average: 0.33, 2.30, 1.41
USER      TTY      FROM             LOGIN@     IDLE    JCPU   PCPU WHAT
root      tty1          -           03:18    13.00s  1.54s  0.37s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4126754
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes        (-u) 4126754
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=104 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
  intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=104 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
  --output_format all --nopower --runmode rate --tune base:peak --size reframe intrate --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.026/templogs/preenv.intrate.026.0.log --lognum 026.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8470
vendor_id       : GenuineIntel
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```

cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 52
siblings       : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture:                  x86_64
CPU op-mode(s):                32-bit, 64-bit
Address sizes:                 46 bits physical, 57 bits virtual
Byte Order:                    Little Endian
CPU(s):                        208
On-line CPU(s) list:          0-207
Vendor ID:                     GenuineIntel
Model name:                   Intel(R) Xeon(R) Platinum 8470
CPU family:                   6
Model:                         143
Thread(s) per core:           2
Core(s) per socket:           52
Socket(s):                    2
Stepping:                      8
CPU max MHz:                  3800.0000
CPU min MHz:                  800.0000
BogoMIPS:                      4000.00
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
                                nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                tsc_adjust bmil hle avx2 smpc bmil2 erms invpcid rtm cqmq rdt_a avx512f
                                avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                                sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc
                                cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni
                                avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                                hwp_pkg_req avx512vbmi umip pkup ospkw waitpkg avx512_vbmi2 gfnv vaes
                                vpcimulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                                bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
L1d cache:                      4.9 MiB (104 instances)
L1i cache:                      3.3 MiB (104 instances)
L2 cache:                       208 MiB (104 instances)
L3 cache:                       210 MiB (2 instances)
NUMA node(s):                   8
NUMA node0 CPU(s):              0-12,104-116

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

| | |
|----------------------------------|--|
| NUMA node1 CPU(s): | 13-25,117-129 |
| NUMA node2 CPU(s): | 26-38,130-142 |
| NUMA node3 CPU(s): | 39-51,143-155 |
| NUMA node4 CPU(s): | 52-64,156-168 |
| NUMA node5 CPU(s): | 65-77,169-181 |
| NUMA node6 CPU(s): | 78-90,182-194 |
| NUMA node7 CPU(s): | 91-103,195-207 |
| Vulnerability Itlb multihit: | Not affected |
| Vulnerability Llft: | Not affected |
| Vulnerability Mds: | Not affected |
| Vulnerability Meltdown: | Not affected |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl and seccomp |
| Vulnerability Spectre v1: | Mitigation; usercopy/swapgs barriers and __user pointer sanitization |
| Vulnerability Spectre v2: | Mitigation; Enhanced IBRS, IBPB conditional, RSB filling |
| Vulnerability Srbds: | Not affected |
| Vulnerability Tsx async abort: | Not affected |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d | 48K | 4.9M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 3.3M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 208M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 105M | 210M | 15 | Unified | 3 | 114688 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-12,104-116

node 0 size: 128672 MB

node 0 free: 127873 MB

node 1 cpus: 13-25,117-129

node 1 size: 129017 MB

node 1 free: 128592 MB

node 2 cpus: 26-38,130-142

node 2 size: 129017 MB

node 2 free: 128620 MB

node 3 cpus: 39-51,143-155

node 3 size: 128982 MB

node 3 free: 128371 MB

node 4 cpus: 52-64,156-168

node 4 size: 129017 MB

node 4 free: 128694 MB

node 5 cpus: 65-77,169-181

node 5 size: 129017 MB

node 5 free: 128702 MB

node 6 cpus: 78-90,182-194

node 6 size: 129017 MB

node 6 free: 128651 MB

node 7 cpus: 91-103,195-207

node 7 size: 128970 MB

node 7 free: 128649 MB

node distances:

| | | | | | | | | |
|------|----|----|----|----|----|----|----|----|
| node | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 0: | 10 | 12 | 12 | 12 | 21 | 21 | 21 | 21 |
| 1: | 12 | 10 | 12 | 12 | 21 | 21 | 21 | 21 |
| 2: | 12 | 12 | 10 | 12 | 21 | 21 | 21 | 21 |
| 3: | 12 | 12 | 12 | 10 | 21 | 21 | 21 | 21 |
| 4: | 21 | 21 | 21 | 21 | 10 | 12 | 12 | 12 |
| 5: | 21 | 21 | 21 | 21 | 12 | 10 | 12 | 12 |

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
6: 21 21 21 21 21 12 12 10 12  
7: 21 21 21 21 12 12 12 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1056473280 kB
```

```
-----  
10. who -r  
run-level 3 Aug 8 03:17
```

```
-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance  
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog  
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyield-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load  
ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck  
rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd udisks2  
indirect wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=105eebe6-343f-430f-8199-ebf93f502b47  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 3.80 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing 1  
kernel.randomize_va_space 2  
vm.compaction_proactiveness 20  
vm.dirty_background_bytes 0  
vm.dirty_background_ratio 10  
vm.dirty_bytes 0  
vm.dirty_expire_centisecs 3000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag      1
    max_ptes_none        511
    max_ptes_shared       256
    max_ptes_swap         64
    pages_to_scan        4096
    scan_sleep_millisecs 10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda2        btrfs  222G  13G  208G  6% /home

-----
20. /sys/devices/virtual/dmi/id
    Vendor:      Cisco Systems Inc
    Product:     UCSX-210C-M7
    Serial:      FCH270978FN

-----
21. dmidecode
    Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        16x 0xCE00 M321R8GA0BB0-CQKD 64 GB 2 rank 4800

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X210M7.4.3.2a.0.0710230213
BIOS Date: 07/10/2023
BIOS Revision: 5.29

Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C | 502.gcc_r(peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210C M7 (Intel Xeon Platinum 8470,
2.00GHz)

SPECrate®2017_int_base = 854

SPECrate®2017_int_peak = 883

CPU2017 License: 9019

Test Date: Aug-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-08 03:21:56-0400.

Report generated on 2024-01-29 18:06:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.