



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 866
SPECrate®2017_int_peak = 896

CPU2017 License: 3358


Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

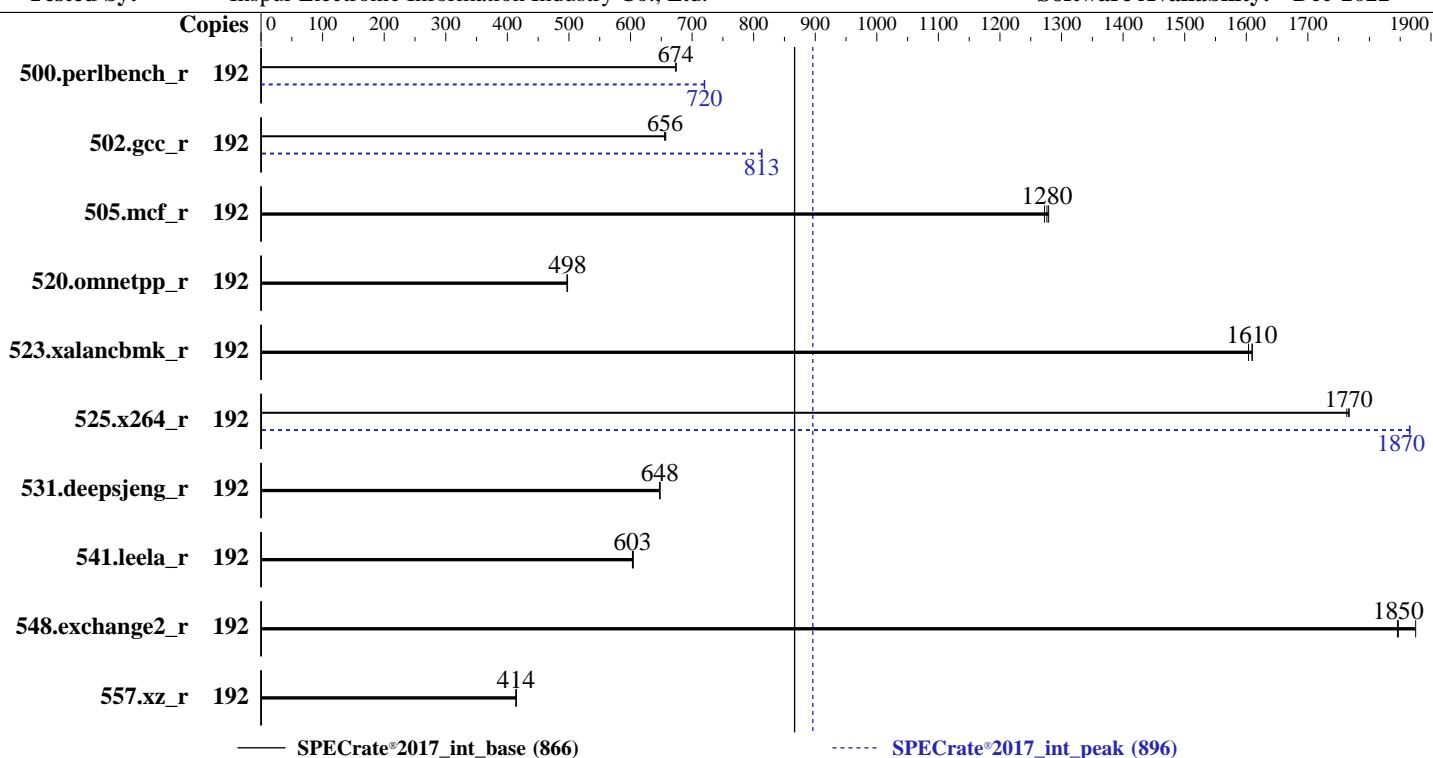

Hardware

CPU Name: Intel Xeon Platinum 8468
Max MHz: 3800
Nominal: 2100
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1 TB NVME SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
Compiler: 5.14.0-70.22.1.el9_0.x86_64
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 04.02.00 released Feb-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	454	674	454	674	454	674	192	425	720	424	720	424	721		
502.gcc_r	192	414	656	415	655	414	657	192	334	813	335	812	334	813		
505.mcf_r	192	244	1270	243	1280	243	1280	192	244	1270	243	1280	243	1280		
520.omnetpp_r	192	506	498	506	498	507	497	192	506	498	506	498	507	497		
523.xalancbmk_r	192	126	1610	126	1600	126	1610	192	126	1610	126	1600	126	1610		
525.x264_r	192	190	1770	190	1770	191	1760	192	180	1860	180	1870	180	1870		
531.deepsjeng_r	192	340	648	340	648	340	648	192	340	648	340	648	340	648		
541.leela_r	192	527	603	527	603	526	605	192	527	603	527	603	526	605		
548.exchange2_r	192	268	1880	272	1850	273	1850	192	268	1880	272	1850	273	1850		
557.xz_r	192	501	414	500	415	501	414	192	501	414	500	415	501	414		

SPECrate®2017_int_base = 866

SPECrate®2017_int_peak = 896

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Aug 22 05:23:45 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 866

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

23. BIOS

```
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
05:23:46 up 0 min, 1 user, load average: 0.20, 0.07, 0.02
USER      TTY      LOGIN@    IDLE    JCPU   PCPU WHAT
root      tty1      05:23    7.00s  1.03s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time  (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2062102
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2062102
virtual memory               (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size reframe intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.004/templogs/preenv.intrate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468
vendor_id       : GenuineIntel
cpu family     : 6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
model          : 143
stepping       : 6
microcode      : 0x2b000130
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings        : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:                  x86_64
CPU op-mode(s):                32-bit, 64-bit
Address sizes:                 52 bits physical, 57 bits virtual
Byte Order:                    Little Endian
CPU(s):                        192
On-line CPU(s) list:          0-191
Vendor ID:                     GenuineIntel
BIOS Vendor ID:               Intel(R) Corporation
Model name:                    Intel(R) Xeon(R) Platinum 8468
BIOS Model name:              Intel(R) Xeon(R) Platinum 8468
CPU family:                   6
Model:                         143
Thread(s) per core:            2
Core(s) per socket:            48
Socket(s):                     2
Stepping:                      6
CPU max MHz:                  3800.0000
CPU min MHz:                  800.0000
BogoMIPS:                      4200.00
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperf fpmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                smx est tm2 ssse3 sdbg fma cx16 xtrpr pdcm pcid dca sse4_1 sse4_2 x2apic
                                movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                tsc_adjust bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
                                rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                                avx512bw avx512vl xsaveopt xsaves xgetbv1 xsaves cqmq_llc cqmq_occur_llc
                                cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16
                                wbnoinvvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                                avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
                                cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:                      4.5 MiB (96 instances)
L1i cache:                      3 MiB (96 instances)
L2 cache:                        192 MiB (96 instances)
L3 cache:                        210 MiB (2 instances)
NUMA node(s):                   8
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

NUMA node0 CPU(s):	0-11,96-107
NUMA node1 CPU(s):	12-23,108-119
NUMA node2 CPU(s):	24-35,120-131
NUMA node3 CPU(s):	36-47,132-143
NUMA node4 CPU(s):	48-59,144-155
NUMA node5 CPU(s):	60-71,156-167
NUMA node6 CPU(s):	72-83,168-179
NUMA node7 CPU(s):	84-95,180-191
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx sync abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 64074 MB
node 0 free: 63819 MB
node 1 cpus: 12-23,108-119
node 1 size: 64470 MB
node 1 free: 64207 MB
node 2 cpus: 24-35,120-131
node 2 size: 64506 MB
node 2 free: 64278 MB
node 3 cpus: 36-47,132-143
node 3 size: 64506 MB
node 3 free: 64266 MB
node 4 cpus: 48-59,144-155
node 4 size: 64506 MB
node 4 free: 64258 MB
node 5 cpus: 60-71,156-167
node 5 size: 64506 MB
node 5 free: 64270 MB
node 6 cpus: 72-83,168-179
node 6 size: 64506 MB
node 6 free: 64254 MB
node 7 cpus: 84-95,180-191
node 7 size: 64486 MB
node 7 free: 63530 MB
node distances:
node  0   1   2   3   4   5   6   7
 0: 10 12 12 12 21 21 21 21
 1: 12 10 12 12 21 21 21 21
 2: 12 12 10 12 21 21 21 21
 3: 12 12 12 10 21 21 21 21
 4: 21 21 21 21 10 12 12 12
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 866

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
5: 21 21 21 21 21 12 10 12 12  
6: 21 21 21 21 12 12 10 12  
7: 21 21 21 21 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 527939088 kB
```

10. who -r

```
run-level 3 Aug 22 05:23
```

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```
Default Target Status  
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES  
enabled dbus-broker getty@ tuned udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited  
blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond  
debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update  
mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmbuild-rebuild  
rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd  
systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap
```

14. cpupower frequency-info

```
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 3.80 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

15. tuned-adm active

```
Current active profile: hpc-compute
```

16. sysctl

```
kernel.numa_balancing 0  
kernel.randomize_va_space 2  
vm.compaction_proactiveness 20  
vm.dirty_background_bytes 0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_background_ratio      3
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                10
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                 10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
```

```
17. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000
```

```
19. OS release
  From /etc/*-release /etc/*-version
  os-release Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```
20. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  209G  611G  26% /home
```

```
21. /sys/devices/virtual/dmi/id
  Vendor:      IEI
  Product:     NF5688M7
  Product Family: Not specified
  Serial:      000000000
```

```
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

NF5688M7 (Intel Xeon Platinum 8468)

SPECCrate®2017_int_base = 866

SPECCrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 04.02.00

BIOS Date: 02/23/2023

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECCrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECCrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs

-fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-fno-strict-overflow

-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin

-lqkmalloc

502.gcc_r: -m32

-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin

-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECCrate®2017_int_base = 866

NF5688M7 (Intel Xeon Platinum 8468)

SPECCrate®2017_int_peak = 896

CPU2017 License: 3358

Test Date: Aug-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Sep-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-22 05:23:45-0400.

Report generated on 2024-01-29 18:08:17 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.