



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

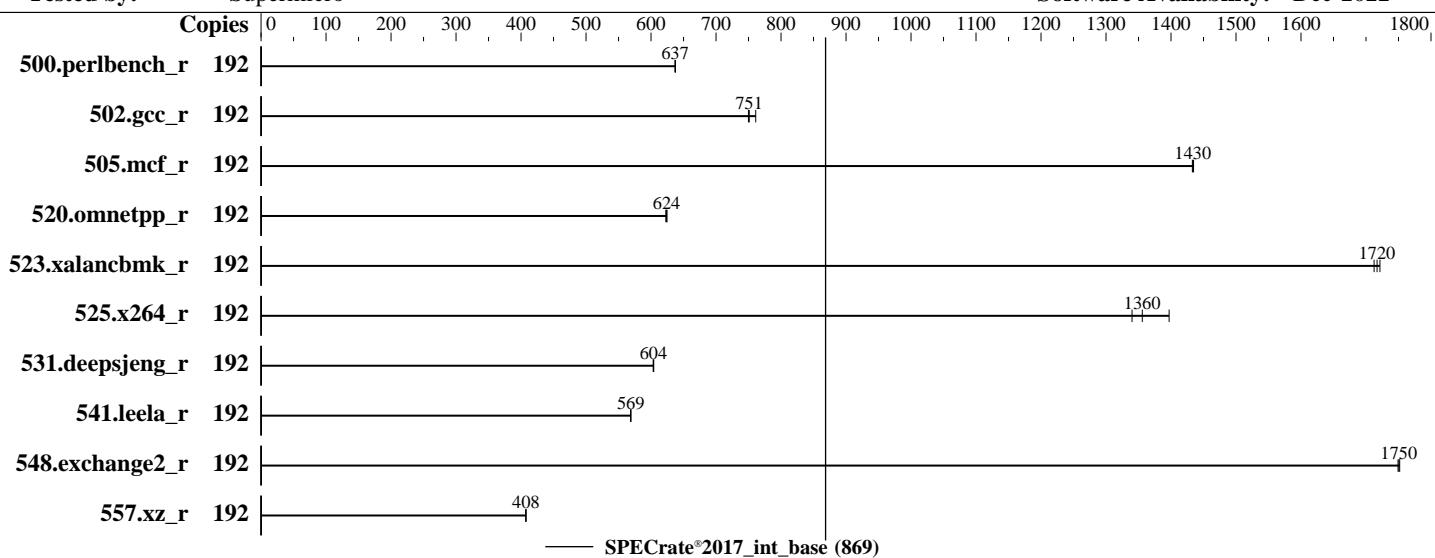

Hardware

CPU Name: Intel Xeon Gold 6418H
Max MHz: 4000
Nominal: 2100
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 2 TB SATA HDD, 7200RPM
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
Compiler: 5.14.21-150400.22-default
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.2 released Mar-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	480	637	480	637	479	638									
502.gcc_r	192	357	761	362	751	363	750									
505.mcf_r	192	217	1430	216	1430	216	1430									
520.omnetpp_r	192	404	624	405	623	403	625									
523.xalancbmk_r	192	118	1710	118	1720	118	1720									
525.x264_r	192	251	1340	241	1400	248	1360									
531.deepsjeng_r	192	364	604	365	603	364	604									
541.leela_r	192	559	569	559	569	559	568									
548.exchange2_r	192	287	1750	288	1750	287	1750									
557.xz_r	192	509	408	509	408	509	407									

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
DCU Streamer Prefetcher = Disable
KTI Prefetch = Enable
SNC = Enable SNC2 (2-clusters)
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Aug 24 18:23:19 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:23:19 up 2 min, 3 users, load average: 0.50, 0.31, 0.12
USER   TTY      FROM             LOGIN@    IDLE   JCPU   PCPU WHAT
root   ttys1     -           18:22    15.00s  1.06s  0.04s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 8253912
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 8253912
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size reframe intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6418H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
cpu cores      : 24
siblings       : 48
4 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 2: core ids 0-23
physical id 3: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
physical id 2: apicids 256-303
physical id 3: apicids 384-431
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 6418H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             4
Stepping:              8
Frequency boost:      enabled
CPU max MHz:          2101.0000
CPU min MHz:          800.0000
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                      invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                      vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                      bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                      tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              240 MiB (4 instances)
NUMA node(s):           8
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

NUMA node0 CPU(s):	0-11,96-107
NUMA node1 CPU(s):	12-23,108-119
NUMA node2 CPU(s):	24-35,120-131
NUMA node3 CPU(s):	36-47,132-143
NUMA node4 CPU(s):	48-59,144-155
NUMA node5 CPU(s):	60-71,156-167
NUMA node6 CPU(s):	72-83,168-179
NUMA node7 CPU(s):	84-95,180-191
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-11,96-107

node 0 size: 257612 MB

node 0 free: 255787 MB

node 1 cpus: 12-23,108-119

node 1 size: 258041 MB

node 1 free: 256328 MB

node 2 cpus: 24-35,120-131

node 2 size: 258007 MB

node 2 free: 257650 MB

node 3 cpus: 36-47,132-143

node 3 size: 258041 MB

node 3 free: 257740 MB

node 4 cpus: 48-59,144-155

node 4 size: 258041 MB

node 4 free: 257719 MB

node 5 cpus: 60-71,156-167

node 5 size: 258041 MB

node 5 free: 257693 MB

node 6 cpus: 72-83,168-179

node 6 size: 258041 MB

node 6 free: 257748 MB

node 7 cpus: 84-95,180-191

node 7 size: 257673 MB

node 7 free: 257353 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	21	21	21	21	21	21
1:	12	10	21	21	21	21	21	21
2:	21	21	10	12	21	21	21	21
3:	21	21	12	10	21	21	21	21
4:	21	21	21	21	10	12	21	21

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
5: 21 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10
```

9. /proc/meminfo

```
MemTotal: 2113026320 kB
```

10. who -r

```
run-level 3 Aug 24 18:22 last=5
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
graphical running
```

12. Services, from systemctl list-unit-files

STATE	UNIT	FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-wireless wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny	
enabled-runtime	systemd-remount-fs	
disabled	accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chrony-wait cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root ipmi ipmiev4l iscsi-init iscsiuio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower	
indirect	wickedd	

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=ebf0634e-4c48-4c5b-86b6-a36f33a307a7
splash=silent
resume=/dev/disk/by-uuid/cf02ba25-9f51-46af-b067-8adca89c27bb
mitigations=auto
quiet
security=apparmor
crashkernel=321M,high
crashkernel=72M,low
```

14. cpupower frequency-info

```
analyzing CPU 0:
```

```
    current policy: frequency should be within 800 MHz and 2.10 GHz.
    The governor "ondemand" may decide which speed to use
    within this range.
```

```
boost state support:
```

```
    Supported: yes
```

```
    Active: yes
```

15. sysctl

```
kernel.numa_balancing
```

1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

Platform Notes (Continued)

```
kernel.randomize_va_space          2
vm.compaction_proactiveness       20
vm.dirty_background_bytes          0
vm.dirty_background_ratio         10
vm.dirty_bytes                    0
vm.dirty_expire_centisecs        3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio            1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode              0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                1
    max_ptes_none         511
    max_ptes_shared       256
    max_ptes_swap         64
    pages_to_scan         4096
    scan_sleep_millisecs 10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda3        xfs   815G  66G  750G  8%  /home

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Supermicro
    Product:         Super Server
    Product Family: Family

-----
21. dmidecode
    Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

32x SK Hynix HMCG94MEBRA123N 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.2
BIOS Date: 03/17/2023
BIOS Revision: 5.29

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revF.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-241H-TNRTTP
(X13QEH+ , Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 869

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-24 21:23:18-0400.

Report generated on 2024-01-29 18:09:12 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-26.