



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066


Test Date: Sep-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

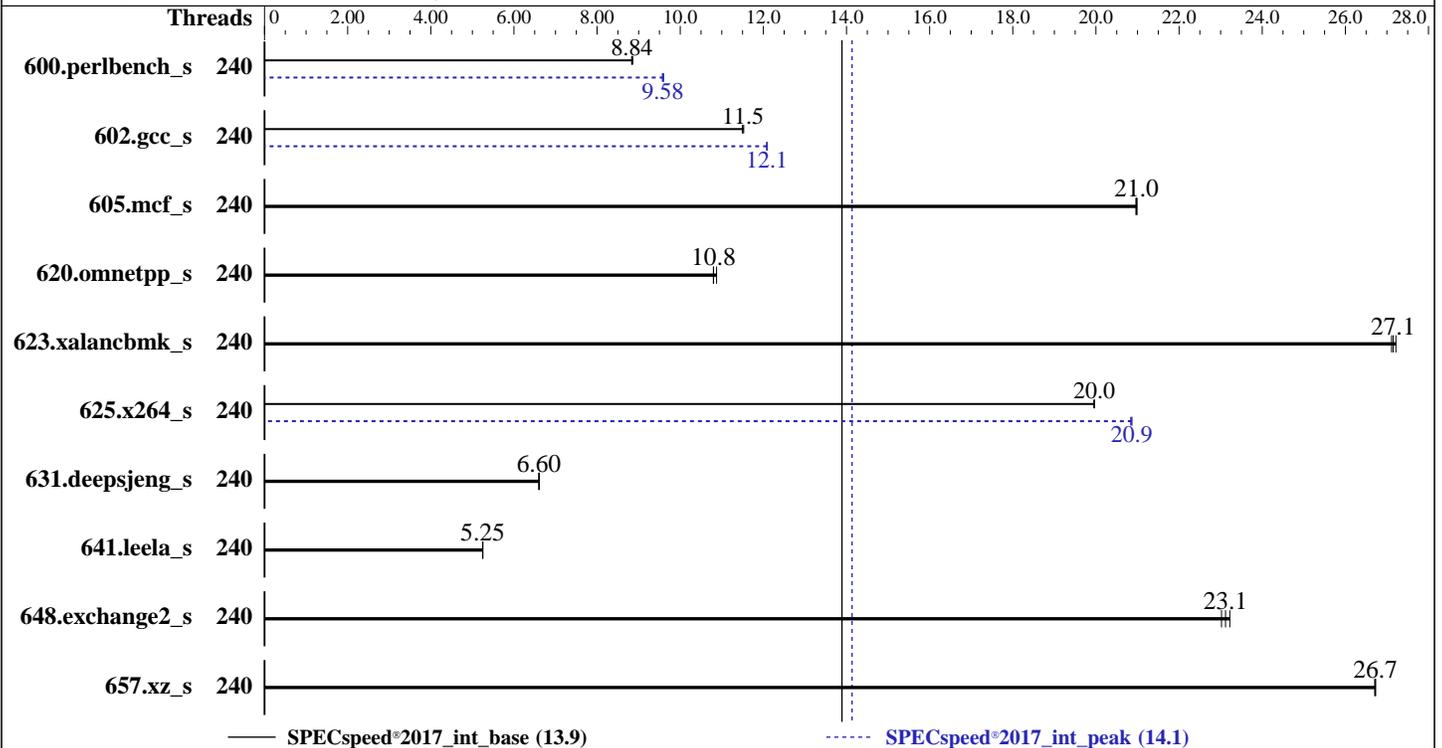

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips
 Orderable: 1,2,3,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 7.68 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 5.29 released Sep-2023 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	240	201	8.84	200	8.86	201	8.83	240	185	9.58	185	9.60	185	9.57
602.gcc_s	240	346	11.5	346	11.5	345	11.5	240	330	12.1	330	12.1	329	12.1
605.mcf_s	240	225	21.0	225	21.0	225	21.0	240	225	21.0	225	21.0	225	21.0
620.omnetpp_s	240	151	10.8	151	10.8	150	10.9	240	151	10.8	151	10.8	150	10.9
623.xalancbmk_s	240	52.1	27.2	52.3	27.1	52.2	27.1	240	52.1	27.2	52.3	27.1	52.2	27.1
625.x264_s	240	88.4	20.0	88.4	20.0	88.4	20.0	240	84.6	20.9	84.7	20.8	84.6	20.9
631.deepsjeng_s	240	217	6.61	217	6.60	217	6.60	240	217	6.61	217	6.60	217	6.60
641.leela_s	240	325	5.25	325	5.25	325	5.25	240	325	5.25	325	5.25	325	5.25
648.exchange2_s	240	127	23.1	127	23.2	128	23.0	240	127	23.1	127	23.2	128	23.0
657.xz_s	240	231	26.7	231	26.7	231	26.7	240	231	26.7	231	26.7	231	26.7

SPECspeed®2017_int_base = **13.9**

SPECspeed®2017_int_peak = **14.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Date: Sep-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
 Set Enable LP [Global] to Single LP
 Set Patrol Scrub to Disabled
 Set Power Performance Tuning to BIOS Controls EFB
 Set ENERGY_PERF_BIAS_CFG mode to Performance
 Set LLC Prefetch to Disabled
 Set FB Thread Slicing to Enabled

Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Mon Sep 25 14:48:34 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 250 (250-6.el9_0)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. tuned-adm active
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
 Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

x86_64 x86_64 GNU/Linux

2. w

```

14:48:34 up 44 min, 3 users, load average: 30.83, 115.16, 76.45
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      ttyl          14:48   18.00s  0.87s  0.00s -bash
root      pts/0        14:04   26.00s  0.03s  0.03s -bash
root      pts/1        14:23   22:42   0.09s  0.09s -bash

```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4124315
max locked memory            (kbytes, -l) unlimited
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4124315
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak --output_format all
  --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.009/templogs/preenv.intspeed.009.0.log
  --lognum 009.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000461
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

cpu cores      : 60
siblings      : 60
4 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,488,490,492,494,496,498,500,502

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 240
On-line CPU(s) list:   0-239
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8490H
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    60
Socket(s):              4
Stepping:               8
CPU max MHz:           3500.0000
CPU min MHz:           800.0000
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Date: Sep-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```

xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
amx_tile flush_lld arch_capabilities

```

Virtualization:

```

VT-x
L1d cache: 11.3 MiB (240 instances)
L1i cache: 7.5 MiB (240 instances)
L2 cache: 480 MiB (240 instances)
L3 cache: 450 MiB (4 instances)

```

```

NUMA node(s): 8
NUMA node0 CPU(s): 0-29
NUMA node1 CPU(s): 30-59
NUMA node2 CPU(s): 60-89
NUMA node3 CPU(s): 90-119
NUMA node4 CPU(s): 120-149
NUMA node5 CPU(s): 150-179
NUMA node6 CPU(s): 180-209
NUMA node7 CPU(s): 210-239

```

```

Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-29
node 0 size: 128073 MB
node 0 free: 127084 MB
node 1 cpus: 30-59
node 1 size: 129017 MB
node 1 free: 128379 MB
node 2 cpus: 60-89
node 2 size: 129017 MB
node 2 free: 128424 MB
node 3 cpus: 90-119
node 3 size: 129017 MB
node 3 free: 128467 MB
node 4 cpus: 120-149
node 4 size: 129017 MB
node 4 free: 128416 MB
node 5 cpus: 150-179
node 5 size: 129017 MB
node 5 free: 128241 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

node 6 cpus: 180-209
node 6 size: 129017 MB
node 6 free: 128455 MB
node 7 cpus: 210-239
node 7 size: 128961 MB
node 7 free: 123718 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 21 21 21 21 21 21
1:  12 10 21 21 21 21 21 21
2:  21 21 10 12 21 21 21 21
3:  21 21 12 10 21 21 21 21
4:  21 21 21 21 10 12 21 21
5:  21 21 21 21 12 10 21 21
6:  21 21 21 21 21 21 10 12
7:  21 21 21 21 21 21 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1055887708 kB

```

'who -r' did not return a run level

```

-----
10. Systemd service manager version: systemd 250 (250-6.el9_0)
   Default Target   Status
   multi-user       starting

```

```

-----
11. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections openibd ostree-remount pmcd pmie pmlogger power-profiles-daemon
qemu-guest-agent rhsmcertd rpcbind rshim rsyslog rtkit-daemon selinux-autorelabel-mark
sep5 smartd sshd sssd switcheroo-control sysstat systemd-network-generator tuned udisks2
upower vgauthd virtqemud vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltyt canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy
httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon
libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
nfs-server nftables nmb numad nvme-f-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
snmptrapd spamassassin speech-dispatcher srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nsppawn@ systemd-pstore systemd-sysextr target
targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnetworkd virtnoddedevd virtnwfilterd
virtproxyd virtsecret virtstoraged vsftpd wpa_supplicant
bad mst
indirect pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
virtlockd virtlogd vsftpd@

```

```

-----
12. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
   root=/dev/mapper/rhel-root

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
nohz_full=1-239
rcu_nocbs=1-239

```

13. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

14. tuned-adm active

Current active profile: throughput-performance

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information
SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 7.0T 75G 6.9T 2% /home

20. /sys/devices/virtual/dmi/id
Product Family: Rack

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
30x Micron MTC20F2085S1RC48BA1 32 GB 2 rank 4800
1x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800
1x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.00.27
BIOS Date: 09/22/2023
BIOS Revision: 5.29

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 13.9

H3C UniServer R6700 G6 (Intel Xeon Platinum 8490H)

SPECspeed®2017_int_peak = 14.1

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-25 02:48:34-0400.

Report generated on 2024-01-29 18:12:09 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.