



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042


**Test Date:** Sep-2023

**Test Sponsor:** Netweb Pte Ltd

**Hardware Availability:** Mar-2022

**Tested by:** Tyrone Systems

**Software Availability:** Aug-2022

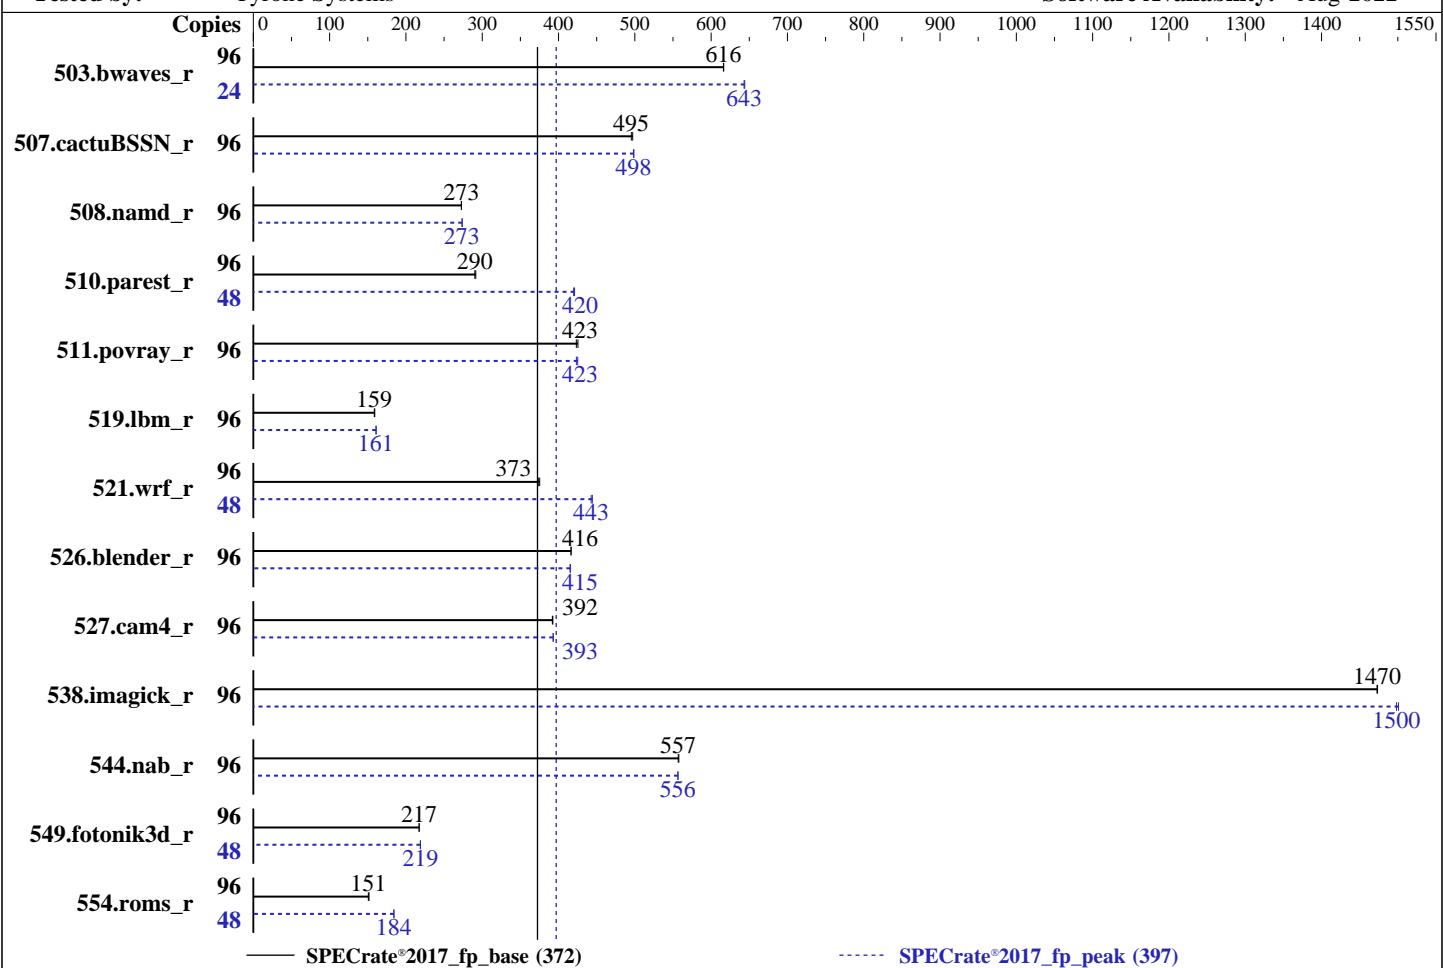

## Hardware

CPU Name: AMD EPYC 7413  
 Max MHz: 3600  
 Nominal: 2650  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-3200V-L)  
 Storage: 1 x 960 GB NVMe  
 Other: None

## Software

OS: Ubuntu 22.04.1  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: No  
 Firmware: Version 2.6 released Apr-2023  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Mar-2022

Tested by: Tyrone Systems

Software Availability: Aug-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1561	617	<b>1563</b>	<b>616</b>			24	<b>374</b>	<b>643</b>	374	644				
507.cactusBSSN_r	96	<b>245</b>	<b>495</b>	244	497			96	<b>244</b>	<b>498</b>	244	499				
508.namd_r	96	334	273	<b>335</b>	<b>273</b>			96	<b>333</b>	<b>273</b>	333	274				
510.parest_r	96	861	292	<b>865</b>	<b>290</b>			48	298	421	<b>299</b>	<b>420</b>				
511.povray_r	96	527	425	<b>530</b>	<b>423</b>			96	<b>529</b>	<b>423</b>	527	425				
519.lbm_r	96	636	159	<b>638</b>	<b>159</b>			96	<b>630</b>	<b>161</b>	628	161				
521.wrf_r	96	<b>576</b>	<b>373</b>	573	375			48	<b>243</b>	<b>443</b>	242	444				
526.blender_r	96	<b>351</b>	<b>416</b>	351	416			96	352	416	<b>352</b>	<b>415</b>				
527.cam4_r	96	<b>428</b>	<b>392</b>	428	393			96	427	393	<b>427</b>	<b>393</b>				
538.imagick_r	96	162	1470	<b>162</b>	<b>1470</b>			96	159	1500	<b>159</b>	<b>1500</b>				
544.nab_r	96	290	558	<b>290</b>	<b>557</b>			96	<b>290</b>	<b>556</b>	290	557				
549.fotonik3d_r	96	1721	217	<b>1722</b>	<b>217</b>			48	854	219	<b>854</b>	<b>219</b>				
554.roms_r	96	<b>1012</b>	<b>151</b>	1006	152			48	<b>414</b>	<b>184</b>	414	184				

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017\_fp\_base = 372

SPECrate®2017\_fp\_peak = 397

Test Date: Sep-2023

Hardware Availability: Mar-2022

Software Availability: Aug-2022

## Operating System Notes (Continued)

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Settings:

cTDP: 280

Determinism Slider set to Power

Package Power: 280

EDC: 300

ACPI SRAT L3 Cache as NUMA Domain: enabled

Memory interleaving: Disabled

4-link xGMI max speed: 16Gbps

Fan Speed: Maximum

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd-Tyrone-Camarero-DA700TR-212R4 Sat Sep 16 00:11:16 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

SPECrate®2017\_fp\_base = 372

SPECrate®2017\_fp\_peak = 397

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Mar-2022

Tested by: Tyrone Systems

Software Availability: Aug-2022

## Platform Notes (Continued)

```
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
-----
1. uname -a
Linux amd-Tyrone-Camarero-DA700TR-212R4 6.2.0-32-generic #32~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug 18
10:40:13 UTC 2 x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
00:11:16 up 4 days, 13:14, 4 users, load average: 56.01, 85.28, 90.95
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
amd pts/0 172.16.12.116 13:50 10:20m 0.30s 0.08s sshd: amd [priv]
amd :1 :1 Mon12 ?xdm? 51:37 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
amd pts/1 172.16.12.116 13:51 4:36m 3.58s 0.27s sudo -i
amd pts/2 172.16.12.116 14:42 4:34m 2:40 2:40 top
-----
3. Username
From environment variable $USER: root
From the command 'logname': amd
-----
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 4127269
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
-----
5. sysinfo process ancestry
/sbin/init splash
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: amd [priv]
sshd: amd@pts/0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2022

**Software Availability:** Aug-2022

## Platform Notes (Continued)

```
-bash
sudo -i
sudo -i
-bash
python3 ./run_amd_rate_aocc320_milanx_A1.py
/bin/bash ./amd_rate_aocc320_milanx_A1.sh
runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 fprate
runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

---

```
6. /proc/cpuinfo
model name      : AMD EPYC 7413 24-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 1
stepping        : 1
microcode       : 0xa0011d1
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 2560 4K pages
cpu cores       : 24
siblings         : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
physical id 1: apicids 64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

```
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          48 bits physical, 48 bits virtual
Byte Order:              Little Endian
CPU(s):                  96
On-line CPU(s) list:    0-95
Vendor ID:               AuthenticAMD
Model name:              AMD EPYC 7413 24-Core Processor
CPU family:              25
Model:                   1
Thread(s) per core:     2
Core(s) per socket:     24
Socket(s):               2
Stepping:                1
Frequency boost:         enabled
CPU max MHz:             3630.8101
CPU min MHz:             1500.0000
BogoMIPS:                 5300.30
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                           lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf
                           rapl dni pclmulqdq monitor ssse3 fma cxl6 pcid sse4_1 sse4_2 movbe
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Mar-2022

Tested by: Tyrone Systems

Software Availability: Aug-2022

## Platform Notes (Continued)

```
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
rdpru wbnoinvd amd_ppin brs arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmlload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid
overflow_recov succor smca fsrm
```

Virtualization:

AMD-V

L1d cache:

1.5 MiB (48 instances)

L1i cache:

1.5 MiB (48 instances)

L2 cache:

24 MiB (48 instances)

L3 cache:

256 MiB (8 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

0-23,48-71

NUMA node1 CPU(s):

24-47,72-95

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	512K	24M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-23,48-71

node 0 size: 515867 MB

node 0 free: 513603 MB

node 1 cpus: 24-47,72-95

node 1 size: 516024 MB

node 1 free: 513641 MB

node distances:

node 0 1

0: 10 32

1: 32 10

9. /proc/meminfo

MemTotal: 1056657132 kB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2022

**Software Availability:** Aug-2022

## Platform Notes (Continued)

10. who -r  
run-level 5 Sep 11 10:57

-----  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)  
Default Target Status  
graphical degraded

-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd

-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online  
accounts-daemon anacron apparmor avahi-daemon bluetooth collectd cron cups  
cups-browsed dmesg e2scrub\_reap getty@ gpu-manager grub-common grub-initrd-fallback  
hv-fcopy-daemon hv-kvp-daemon hv-vss-daemon irqbalance kerneloops keyboard-setup  
networkd-dispatcher nss-tds openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb  
snapd ssh switcheroo-control systemd-oomd systemd-pstore systemd-resolved  
systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw unattended-upgrades wpa\_supplicant  
netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs  
disabled acpid brltty console-getty debug-shell intel-sgx-load-module ipmievd nftables  
openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@  
speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator  
systemd-networkd systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower  
wpa\_supplicant-n180211@ wpa\_supplicant-wired@ wpa\_supplicant@  
generated apport openipmi speech-dispatcher  
indirect saned@ spice-vdagentd uuid  
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned  
sudo x11-common

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.2.0-32-generic  
root=UUID=02b02676-0929-4134-bd0f-de88e4a5d99c  
ro  
quiet  
splash  
vt.handoff=7

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

**Test Date:** Sep-2023

Test Sponsor: Netweb Pte Ltd

**Hardware Availability:** Mar-2022

Tested by: Tyrone Systems

**Software Availability:** Aug-2022

## Platform Notes (Continued)

```
vm.swappiness           1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    1

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap            64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release Ubuntu 22.04 LTS

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  ext4  938G  66G  824G  8%  /

-----
20. /sys/devices/virtual/dmi/id
Vendor:        Supermicro
Product:       Super Server
Serial:        AWZOJAS00027

-----
21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     2.6
BIOS Date:        04/13/2023
BIOS Revision:    5.22
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2022

**Software Availability:** Aug-2022

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----


=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----


=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----


=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----


=====
Fortran      | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----


=====
Fortran, C    | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Mar-2022

Tested by: Tyrone Systems

Software Availability: Aug-2022

## Compiler Version Notes (Continued)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64

527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Mar-2022

Software Availability: Aug-2022

## Base Optimization Flags

C benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fsto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -fsto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -fsto -Wl,-mllvm -Wl,-region-vectorize
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Mar-2022

Software Availability: Aug-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2022

**Software Availability:** Aug-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -enable-llicm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

SPECrate®2017\_fp\_base = 372

SPECrate®2017\_fp\_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Mar-2022

Software Availability: Aug-2022

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2022

**Software Availability:** Aug-2022

## Peak Optimization Flags (Continued)

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

SPECrate®2017\_fp\_base = 372

SPECrate®2017\_fp\_peak = 397

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Mar-2022

Tested by: Tyrone Systems

Software Availability: Aug-2022

## Peak Optimization Flags (Continued)

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive -lamdlibm
-ljemalloc -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-Mrecursive -Hz,1,0x1 -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

**SPECrate®2017\_fp\_base = 372**

**SPECrate®2017\_fp\_peak = 397**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Mar-2022

Software Availability: Aug-2022

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -std=c++98 -fno-adx -fno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -fno-adx -fno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Mrecursive -lamdlibm -ljemalloc
-lflang
```

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DAS700TU-212RT  
(2.65 GHz, AMD EPYC 7413)

SPECrate®2017\_fp\_base = 372

SPECrate®2017\_fp\_peak = 397

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Mar-2022

Software Availability: Aug-2022

## Peak Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Milan-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Milan-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-15 14:41:15-0400.

Report generated on 2023-10-25 10:34:56 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.