



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

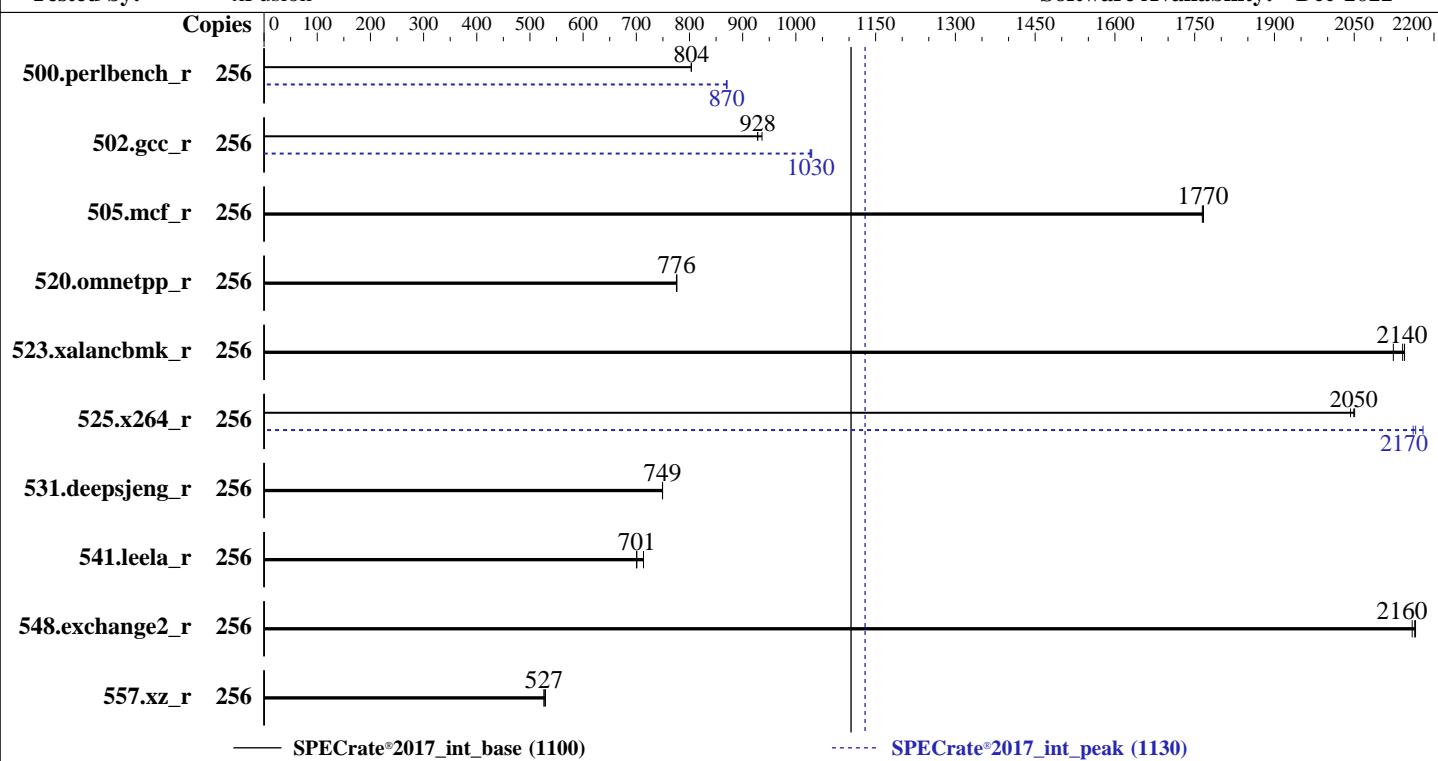

Hardware

CPU Name: Intel Xeon Platinum 8454H
 Max MHz: 3400
 Nominal: 2100
 Enabled: 128 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

OS:

Red Hat Enterprise Linux release 9.0 (Plow)

5.14.0-70.13.1.el9_0.x86_64

Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

Parallel: No

Firmware: Version 01.02.00.05 Released Jul-2023

File System: xfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 32/64-bit

Other: jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488

Test Date: Oct-2023

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	507	803	507	804	507	804	256	468	870	468	870	469	869		
502.gcc_r	256	390	928	391	928	387	936	256	353	1030	352	1030	353	1030		
505.mcf_r	256	234	1770	234	1760	234	1770	256	234	1770	234	1760	234	1770		
520.omnetpp_r	256	433	776	433	776	433	775	256	433	776	433	776	433	775		
523.xalancbmk_r	256	126	2140	126	2140	127	2120	256	126	2140	126	2140	127	2120		
525.x264_r	256	219	2050	219	2050	219	2040	256	206	2180	207	2160	207	2170		
531.deepsjeng_r	256	392	749	391	749	392	749	256	392	749	391	749	392	749		
541.leela_r	256	605	701	594	714	605	700	256	605	701	594	714	605	700		
548.exchange2_r	256	311	2160	310	2170	310	2160	256	311	2160	310	2170	310	2160		
557.xz_r	256	522	529	525	527	525	527	256	522	529	525	527	525	527		

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/lib/ia32:/home/Uniautos/cpu2017/je5.0.1-32"

MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Oct 7 11:26:19 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488

Test Date: Oct-2023

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 GNU/Linux

2. w
11:26:19 up 9 min, 2 users, load average: 0.06, 0.35, 0.33
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 11:23 2:49 0.04s 0.04s -bash
root pts/0 11:23 11.00s 1.24s 0.00s tail -100f nohup.out

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (i) 4125098
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4125098
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 256 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg
--define smt-on --define cores=128 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --define default-platform-flags --copies 256 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size reframe intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.021/templogs/preenv.intrate.021.0.log --lognum 021.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/Uniautos/cpu2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8454H
vendor_id : GenuineIntel
cpu family : 6

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488

Test Date: Oct-2023

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```

model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
4 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8454H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8454H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):            4
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                      intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms
                      invpcid cqmm_rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaved xgetbv1
                      xsaves cqmm_llc cqmm_occur_llc cqmm_mbmm_total cqmm_mbmm_local split_lock_detect
                      avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_lll arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488

Test Date: Oct-2023

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

L2 cache:	256 MiB (128 instances)
L3 cache:	330 MiB (4 instances)
NUMA node(s):	16
NUMA node0 CPU(s):	0-7,128-135
NUMA node1 CPU(s):	8-15,136-143
NUMA node2 CPU(s):	16-23,144-151
NUMA node3 CPU(s):	24-31,152-159
NUMA node4 CPU(s):	32-39,160-167
NUMA node5 CPU(s):	40-47,168-175
NUMA node6 CPU(s):	48-55,176-183
NUMA node7 CPU(s):	56-63,184-191
NUMA node8 CPU(s):	64-71,192-199
NUMA node9 CPU(s):	72-79,200-207
NUMA node10 CPU(s):	80-87,208-215
NUMA node11 CPU(s):	88-95,216-223
NUMA node12 CPU(s):	96-103,224-231
NUMA node13 CPU(s):	104-111,232-239
NUMA node14 CPU(s):	112-119,240-247
NUMA node15 CPU(s):	120-127,248-255
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	82.5M	330M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-7,128-135

node 0 size: 63740 MB

node 0 free: 63163 MB

node 1 cpus: 8-15,136-143

node 1 size: 64508 MB

node 1 free: 64189 MB

node 2 cpus: 16-23,144-151

node 2 size: 64508 MB

node 2 free: 63040 MB

node 3 cpus: 24-31,152-159

node 3 size: 64508 MB

node 3 free: 64158 MB

node 4 cpus: 32-39,160-167

node 4 size: 64508 MB

node 4 free: 64233 MB

node 5 cpus: 40-47,168-175

node 5 size: 64508 MB

node 5 free: 64267 MB

node 6 cpus: 48-55,176-183

node 6 size: 64508 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECCrate®2017_int_base = 1100

SPECCrate®2017_int_peak = 1130

CPU2017 License: 6488

Test Date: Oct-2023

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 6 free: 64276 MB
node 7 cpus: 56-63,184-191
node 7 size: 64508 MB
node 7 free: 64295 MB
node 8 cpus: 64-71,192-199
node 8 size: 64508 MB
node 8 free: 64299 MB
node 9 cpus: 72-79,200-207
node 9 size: 64508 MB
node 9 free: 64281 MB
node 10 cpus: 80-87,208-215
node 10 size: 64508 MB
node 10 free: 64256 MB
node 11 cpus: 88-95,216-223
node 11 size: 64472 MB
node 11 free: 64234 MB
node 12 cpus: 96-103,224-231
node 12 size: 64508 MB
node 12 free: 64262 MB
node 13 cpus: 104-111,232-239
node 13 size: 64508 MB
node 13 free: 64286 MB
node 14 cpus: 112-119,240-247
node 14 size: 64508 MB
node 14 free: 64278 MB
node 15 cpus: 120-127,248-255
node 15 size: 64488 MB
node 15 free: 64259 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  1: 12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  2: 12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
  3: 12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
  4: 21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
  5: 21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
  6: 21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
  7: 21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
  8: 21  21  21  21  21  21  21  21  10  12  12  12  21  21  21  21
  9: 21  21  21  21  21  21  21  21  12  10  12  12  21  21  21  21
 10: 21  21  21  21  21  21  21  21  12  12  10  12  21  21  21  21
 11: 21  21  21  21  21  21  21  21  12  12  12  10  21  21  21  21
 12: 21  21  21  21  21  21  21  21  21  21  21  10  12  12  12  12
 13: 21  21  21  21  21  21  21  21  21  21  21  12  10  12  12  12
 14: 21  21  21  21  21  21  21  21  21  21  21  21  12  10  12  12
 15: 21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  10
```

```
9. /proc/meminfo
MemTotal:      1056063264 kB
```

```
10. who -r
run-level 3 Oct 7 11:17
```

```
11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target  Status
multi-user      degraded
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----  
12. Failed units, from systemctl list-units --state=failed  
    UNIT          LOAD   ACTIVE SUB   DESCRIPTION  
    * sep5.service loaded failed failed systemd script to load sep5 driver at boot time  
  
-----  
13. Services, from systemctl list-unit-files  
    STATE          UNIT FILES  
    enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited chronyd crond  
                  dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd  
    enabled-runtime      rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2  
    disabled       chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update  
                  nftables rdisc rhsm-facts rpmbuild serial-getty@ sshd-keygen@  
                  systemd-boot-check-no-failures systemd-pstore systemd-sysext  
    indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
  
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64  
    root=UUID=058bdfdf1-c62b-4fad-8d41-5c40aa179007  
    ro  
    crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
    resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499  
    nohz_full=1-72  
  
-----  
15. cpupower frequency-info  
    analyzing CPU 0:  
      Unable to determine current policy  
      boost state support:  
        Supported: yes  
        Active: yes  
  
-----  
16. tuned-adm active  
    Current active profile: throughput-performance  
  
-----  
17. sysctl  
    kernel.numa_balancing          1  
    kernel.randomize_va_space      2  
    vm.compaction_proactiveness   20  
    vm.dirty_background_bytes      0  
    vm.dirty_background_ratio     10  
    vm.dirty_bytes                 0  
    vm.dirty_expire_centisecs    3000  
    vm.dirty_ratio                 40  
    vm.dirty_writeback_centisecs  500  
    vm.dirtytime_expire_seconds   43200  
    vm.extfrag_threshold          500  
    vm.min_unmapped_ratio         1  
    vm.nr_hugepages                0  
    vm.nr_hugepages_mempolicy     0  
    vm.nr_overcommit_hugepages    0  
    vm.swappiness                  10  
    vm.watermark_boost_factor     15000  
    vm.watermark_scale_factor      10  
    vm.zone_reclaim_mode           0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage
defrag always defer+defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

21. Disk information
SPEC is set to: /home/Uniautos/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda5 xfs 820G 141G 680G 18% /home

22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 5885H V7
Product Family: EagleStream

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.00.05
BIOS Date: 07/13/2023

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 1100

SPECrate®2017_int_peak = 1130

CPU2017 License: 6488

Test Date: Oct-2023

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-06 23:26:18-0400.

Report generated on 2024-01-29 18:13:45 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-07.