



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 356

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

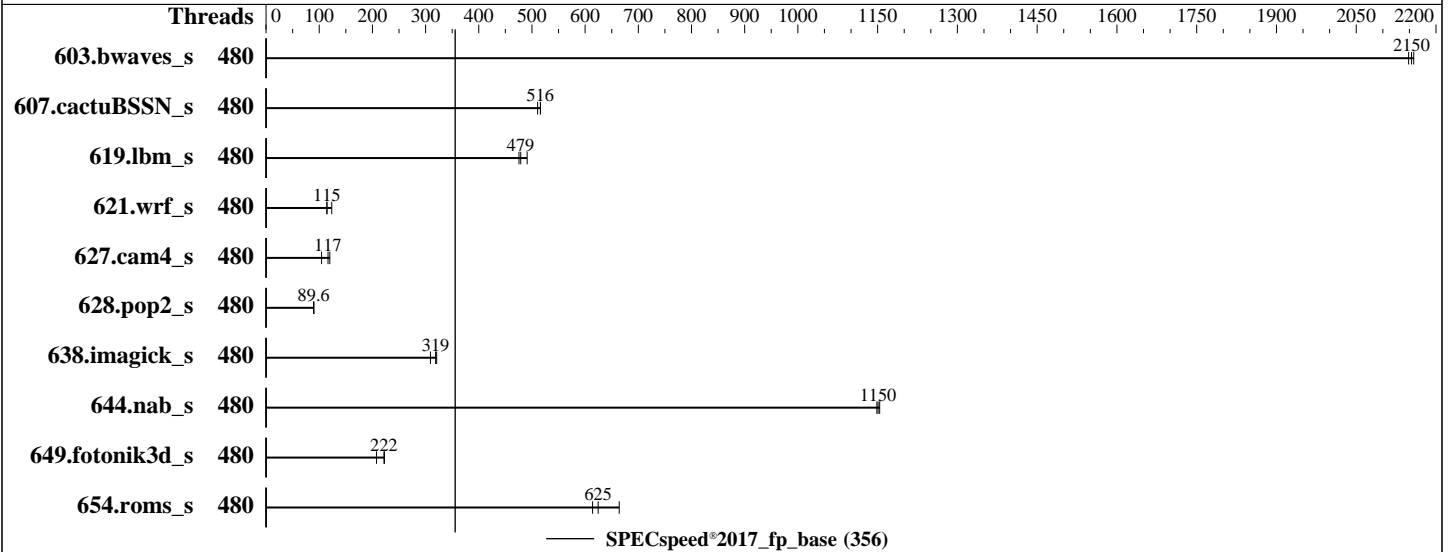

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 480 cores, 8 chips
 Orderable: 8 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version EBE103M 1.10 released Oct-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 356

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	480	27.3	2160	<u>27.4</u>	<u>2150</u>	27.5	2150							
607.cactuBSSN_s	480	32.6	511	<u>32.3</u>	<u>516</u>	32.3	516							
619.lbm_s	480	<u>10.9</u>	<u>479</u>	11.0	476	10.7	491							
621.wrf_s	480	116	114	107	124	<u>115</u>	<u>115</u>							
627.cam4_s	480	<u>76.0</u>	<u>117</u>	73.9	120	84.9	104							
628.pop2_s	480	<u>132</u>	<u>89.6</u>	132	89.8	133	89.4							
638.imagick_s	480	46.7	309	45.0	321	<u>45.2</u>	<u>319</u>							
644.nab_s	480	15.2	1150	15.1	1150	<u>15.2</u>	<u>1150</u>							
649.fotonik3d_s	480	43.9	208	41.0	223	<u>41.1</u>	<u>222</u>							
654.roms_s	480	23.7	664	25.6	614	<u>25.2</u>	<u>625</u>							

SPECspeed®2017_fp_base = 356

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 356

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Platform Notes (Continued)

Hyper-Threading set to Disabled
Adjacent Cache Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Nov 25 05:33:41 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:33:41 up 2:29, 1 user, load average: 278.54, 360.48, 386.51
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 03:05 2:26m 1.12s 0.00s /bin/bash ./speccpu_rock.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 16512136
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 356

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

open files                (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 16512136
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speccpu_rock.sh
/bin/bash ./speccpu_rock.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=480 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=480 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.008/templogs/preenv.fpspeed.008.0.log --lognum 008.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0004b1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 60
siblings       : 60
8 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118
physical id 1: apicids
128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 1
80, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 23
2, 234, 236, 238, 240, 242, 244, 246
physical id 2: apicids
256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 3
08, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 36
0, 362, 364, 366, 368, 370, 372, 374
physical id 3: apicids

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 356

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478, 480, 482, 484, 486, 488, 490, 492, 494, 496, 498, 500, 502

physical id 4: apicids

512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 616, 618, 620, 622, 624, 626, 628, 630

physical id 5: apicids

640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758

physical id 6: apicids

768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 854, 856, 858, 860, 862, 864, 866, 868, 870, 872, 874, 876, 878, 880, 882, 884, 886

physical id 7: apicids

896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974, 976, 978, 980, 982, 984, 986, 988, 990, 992, 994, 996, 998, 1000, 1002, 1004, 1006, 1008, 1010, 1012, 1014

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               480
On-line CPU(s) list:  0-479
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) Platinum 8490H
CPU family:           6
Model:                143
Thread(s) per core:  1
Core(s) per socket:  60
Socket(s):            8
Stepping:             8
CPU max MHz:         3500.0000
CPU min MHz:         800.0000
BogoMIPS:             3800.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                    vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                    flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                    erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                    arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 356

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```

Virtualization:          VT-x
L1d cache:              22.5 MiB (480 instances)
L1i cache:              15 MiB (480 instances)
L2 cache:               960 MiB (480 instances)
L3 cache:               900 MiB (8 instances)
NUMA node(s):          8
NUMA node0 CPU(s):     0-59
NUMA node1 CPU(s):     60-119
NUMA node2 CPU(s):     120-179
NUMA node3 CPU(s):     180-239
NUMA node4 CPU(s):     240-299
NUMA node5 CPU(s):     300-359
NUMA node6 CPU(s):     360-419
NUMA node7 CPU(s):     420-479
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                           sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	22.5M	12	Data	1	64	1	64
L1i	32K	15M	8	Instruction	1	64	1	64
L2	2M	960M	16	Unified	2	2048	1	64
L3	112.5M	900M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-59
node 0 size: 515609 MB
node 0 free: 514301 MB
node 1 cpus: 60-119
node 1 size: 516080 MB
node 1 free: 513000 MB
node 2 cpus: 120-179
node 2 size: 516080 MB
node 2 free: 513772 MB
node 3 cpus: 180-239
node 3 size: 516080 MB
node 3 free: 513602 MB
node 4 cpus: 240-299
node 4 size: 516080 MB
node 4 free: 514235 MB
node 5 cpus: 300-359
node 5 size: 516046 MB
node 5 free: 514566 MB
node 6 cpus: 360-419
node 6 size: 516080 MB
node 6 free: 512978 MB
node 7 cpus: 420-479

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 356

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 7 size: 516005 MB
node 7 free: 514451 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  21  21  31  31  21  21  31
1:  21  10  31  21  21  31  31  21
2:  21  31  10  21  21  31  31  21
3:  31  21  21  10  31  21  21  31
4:  31  21  21  31  10  21  21  31
5:  21  31  31  21  21  10  31  21
6:  21  31  31  21  21  31  10  21
7:  31  21  21  31  31  21  21  10
```

```
-----
9. /proc/meminfo
   MemTotal:      4227139136 kB
```

```
-----
10. who -r
    run-level 3 Nov 25 03:04
```

```
-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
    Default Target   Status
    multi-user       running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb nvme-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=b994fb3e-4843-44ed-8f13-53774aafae18
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.
  boost state support:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 356

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

Supported: yes
Active: yes

```

15. sysctl
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

```

16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 445G 82G 363G 19% /

```

```

20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR950 V3
Product Family: ThinkSystem
Serial:      BLRSDV044

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 356

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

41x SK Hynix HMC94AEBRA102N 64 GB 2 rank 4800
14x SK Hynix HMC94AEBRA109N 64 GB 2 rank 4800
9x SK Hynix HMC94AEBRA123N 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: EBE103M-1.10
BIOS Date: 10/10/2023
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 356

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 356

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-24 16:33:41-0500.
Report generated on 2023-12-11 09:56:52 by CPU2017 PDF formatter v6716.
Originally published on 2023-12-11.