



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

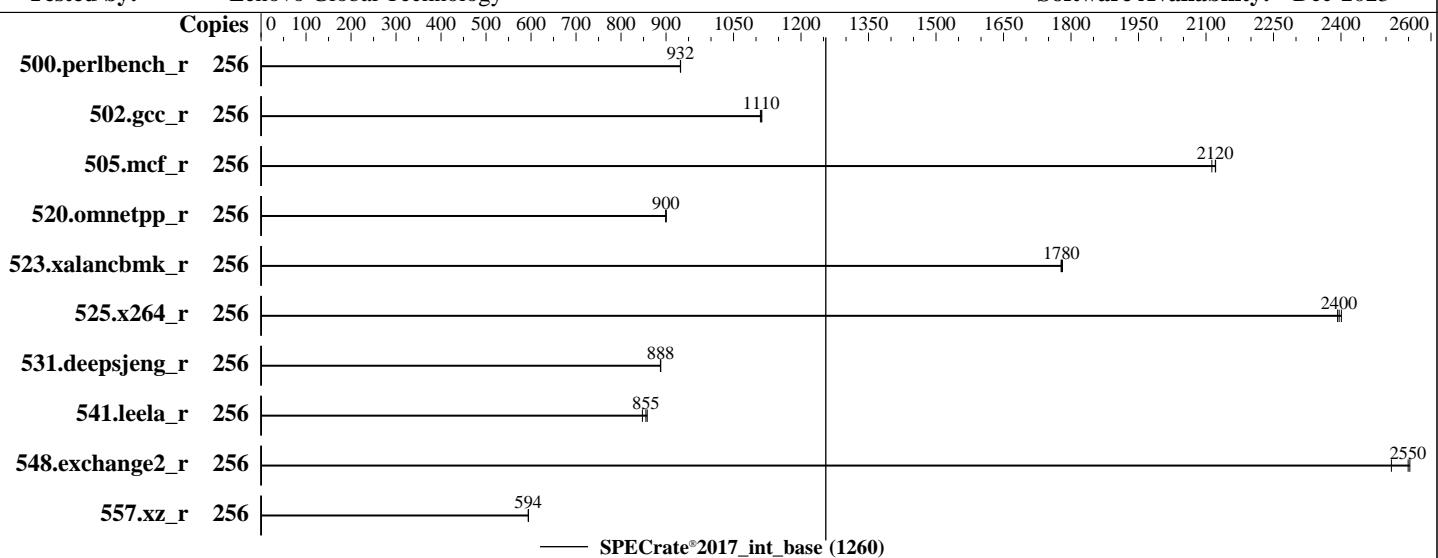

Hardware

CPU Name: Intel Xeon Platinum 8444H
Max MHz: 4000
Nominal: 2900
Enabled: 128 cores, 8 chips, 2 threads/core
Orderable: 8 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 45 MB I+D on chip per chip
Other: None
Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

OS:

Red Hat Enterprise Linux 9.2 (Plow)

Kernel 5.14.0-284.11.1.el9_2.x86_64

C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;

No

Lenovo BIOS Version EBE103M 1.10 released Oct-2023

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC4

LLC Prefetch set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Nov 29 04:23:44 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-13.el9_2)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
04:23:44 up 4:58, 1 user, load average: 173.25, 235.47, 246.47
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 23:26 2:50m 1.04s 0.03s /bin/bash ./speccpu_rock.sh

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```
-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 16512563  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 16512563  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 31  
login -- root  
-bash  
/bin/bash ./speccpu_rock.sh  
/bin/bash ./speccpu_rock.sh  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=128 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=128 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.017/templogs/preenv.intrate.017.0.log --lognum 017.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3
```

```
-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8444H  
vendor_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b0004b1  
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
cpu cores : 16  
siblings : 32  
8 physical ids (chips)  
256 processors (hardware threads)  
physical id 0: core ids 0-15  
physical id 1: core ids 0-15  
physical id 2: core ids 0-15  
physical id 3: core ids 0-15  
physical id 4: core ids 0-15  
physical id 5: core ids 0-15  
physical id 6: core ids 0-15  
physical id 7: core ids 0-15  
physical id 0: apicids 0-31
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```
physical id 1: apicids 128-159
physical id 2: apicids 256-287
physical id 3: apicids 384-415
physical id 4: apicids 512-543
physical id 5: apicids 640-671
physical id 6: apicids 768-799
physical id 7: apicids 896-927
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 256
On-line CPU(s) list: 0-255
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8444H
BIOS Model name: Intel(R) Xeon(R) Platinum 8444H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 8
Stepping: 8
CPU max MHz: 4000.0000
CPU min MHz: 800.0000
BogoMIPS: 5800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf fmperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
       tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2
       smep bmil2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
       avx512fma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsavec xgetbv1 xsavev cqmq_llc cqmq_occup_llc cqmq_mbm_total
       cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
       arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
       vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocpndq la57 rdpid
       bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
       tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
       flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 360 MiB (8 instances)
NUMA node(s): 32
NUMA node0 CPU(s): 0-3,128-131
NUMA node1 CPU(s): 4-7,132-135
NUMA node2 CPU(s): 8-11,136-139
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

NUMA node3 CPU(s):	12-15,140-143
NUMA node4 CPU(s):	16-19,144-147
NUMA node5 CPU(s):	20-23,148-151
NUMA node6 CPU(s):	24-27,152-155
NUMA node7 CPU(s):	28-31,156-159
NUMA node8 CPU(s):	32-35,160-163
NUMA node9 CPU(s):	36-39,164-167
NUMA node10 CPU(s):	40-43,168-171
NUMA node11 CPU(s):	44-47,172-175
NUMA node12 CPU(s):	48-51,176-179
NUMA node13 CPU(s):	52-55,180-183
NUMA node14 CPU(s):	56-59,184-187
NUMA node15 CPU(s):	60-63,188-191
NUMA node16 CPU(s):	64-67,192-195
NUMA node17 CPU(s):	68-71,196-199
NUMA node18 CPU(s):	72-75,200-203
NUMA node19 CPU(s):	76-79,204-207
NUMA node20 CPU(s):	80-83,208-211
NUMA node21 CPU(s):	84-87,212-215
NUMA node22 CPU(s):	88-91,216-219
NUMA node23 CPU(s):	92-95,220-223
NUMA node24 CPU(s):	96-99,224-227
NUMA node25 CPU(s):	100-103,228-231
NUMA node26 CPU(s):	104-107,232-235
NUMA node27 CPU(s):	108-111,236-239
NUMA node28 CPU(s):	112-115,240-243
NUMA node29 CPU(s):	116-119,244-247
NUMA node30 CPU(s):	120-123,248-251
NUMA node31 CPU(s):	124-127,252-255
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	45M	360M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 32 nodes (0-31)
node 0 cpus: 0-3,128-131
node 0 size: 128550 MB
node 0 free: 127956 MB
node 1 cpus: 4-7,132-135
node 1 size: 129022 MB
node 1 free: 128539 MB
node 2 cpus: 8-11,136-139
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 2 size: 129022 MB
node 2 free: 128499 MB
node 3 cpus: 12-15,140-143
node 3 size: 129022 MB
node 3 free: 128536 MB
node 4 cpus: 16-19,144-147
node 4 size: 129022 MB
node 4 free: 128551 MB
node 5 cpus: 20-23,148-151
node 5 size: 129022 MB
node 5 free: 128540 MB
node 6 cpus: 24-27,152-155
node 6 size: 129022 MB
node 6 free: 128504 MB
node 7 cpus: 28-31,156-159
node 7 size: 129022 MB
node 7 free: 128539 MB
node 8 cpus: 32-35,160-163
node 8 size: 129022 MB
node 8 free: 128396 MB
node 9 cpus: 36-39,164-167
node 9 size: 129022 MB
node 9 free: 128486 MB
node 10 cpus: 40-43,168-171
node 10 size: 129022 MB
node 10 free: 128472 MB
node 11 cpus: 44-47,172-175
node 11 size: 129022 MB
node 11 free: 128497 MB
node 12 cpus: 48-51,176-179
node 12 size: 129022 MB
node 12 free: 128479 MB
node 13 cpus: 52-55,180-183
node 13 size: 129022 MB
node 13 free: 128534 MB
node 14 cpus: 56-59,184-187
node 14 size: 129022 MB
node 14 free: 128558 MB
node 15 cpus: 60-63,188-191
node 15 size: 129022 MB
node 15 free: 128554 MB
node 16 cpus: 64-67,192-195
node 16 size: 129022 MB
node 16 free: 128547 MB
node 17 cpus: 68-71,196-199
node 17 size: 129022 MB
node 17 free: 128563 MB
node 18 cpus: 72-75,200-203
node 18 size: 129022 MB
node 18 free: 128550 MB
node 19 cpus: 76-79,204-207
node 19 size: 129022 MB
node 19 free: 128556 MB
node 20 cpus: 80-83,208-211
node 20 size: 129022 MB
node 20 free: 128534 MB
node 21 cpus: 84-87,212-215
node 21 size: 129022 MB
node 21 free: 128541 MB
node 22 cpus: 88-91,216-219
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 22 size: 129022 MB
node 22 free: 128513 MB
node 23 cpus: 92-95,220-223
node 23 size: 129022 MB
node 23 free: 128542 MB
node 24 cpus: 96-99,224-227
node 24 size: 129022 MB
node 24 free: 128554 MB
node 25 cpus: 100-103,228-231
node 25 size: 129022 MB
node 25 free: 128535 MB
node 26 cpus: 104-107,232-235
node 26 size: 128982 MB
node 26 free: 128516 MB
node 27 cpus: 108-111,236-239
node 27 size: 129022 MB
node 27 free: 128171 MB
node 28 cpus: 112-115,240-243
node 28 size: 129022 MB
node 28 free: 128525 MB
node 29 cpus: 116-119,244-247
node 29 size: 129022 MB
node 29 free: 128555 MB
node 30 cpus: 120-123,248-251
node 30 size: 129022 MB
node 30 free: 128554 MB
node 31 cpus: 124-127,252-255
node 31 size: 129008 MB
node 31 free: 128547 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
 0: 10 12 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31
 1: 12 10 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31
 2: 12 12 10 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31
 3: 12 12 12 10 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31
 4: 21 21 21 21 10 12 12 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
 5: 21 21 21 21 21 12 10 12 12 31 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
 6: 21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
 7: 21 21 21 21 12 12 12 10 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
 8: 21 21 21 21 31 31 31 10 12 12 12 21 21 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
 9: 21 21 21 21 31 31 31 12 10 12 12 21 21 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
10: 21 21 21 21 31 31 31 31 31 12 12 10 12 21 21 21 21 21 21 21 31 31 31 31 31
 31 31 31 21 21 21 21
11: 21 21 21 21 31 31 31 31 31 12 12 12 12 10 21 21 21 21 21 21 21 31 31 31 31
 31 31 31 21 21 21 21
12: 31 31 31 31 21 21 21 21 21 21 21 21 21 10 12 12 12 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31
13: 31 31 31 31 21 21 21 21 21 21 21 21 21 12 12 31 31 31 31 21 21 21 21 21 21
 21 21 21 31 31 31 31
21 21 21 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```
man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=UUID=116409c2-57ac-4857-ace6-bb315b1769ff
ro
resume=UUID=075e4fda-52f2-4584-8323-c813820fb1bd

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 4.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb4 xfs 371G 235G 137G 64% /home

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR950 V3
Product Family: ThinkSystem
Serial: BLRSDV044

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
41x SK Hynix HMCG94AEBRA102N 64 GB 2 rank 4800
14x SK Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
9x SK Hynix HMCG94AEBRA123N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: EBE103M-1.10
BIOS Date: 10/10/2023
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.90 GHz, Intel Xeon Platinum 8444H)

SPECrate®2017_int_base = 1260

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-28 15:23:43-0500.

Report generated on 2023-12-20 13:12:39 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-20.