



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

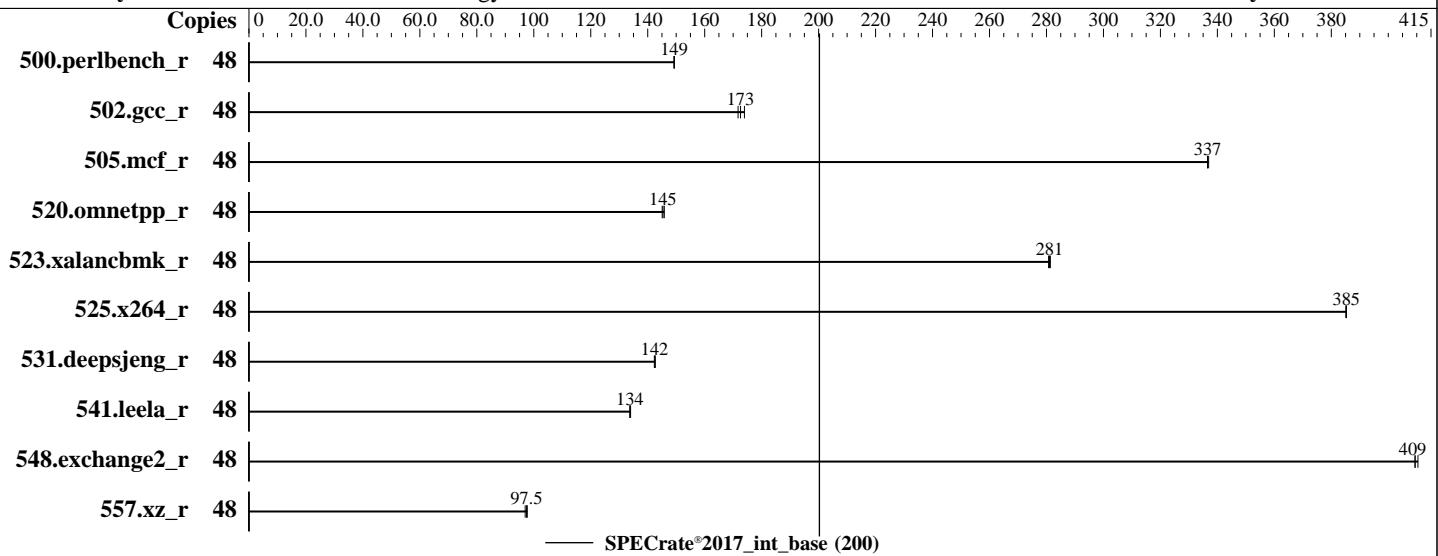

### Hardware

CPU Name: Intel Xeon Gold 6403N  
Max MHz: 3600  
Nominal: 1900  
Enabled: 24 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 45 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R, running at 4000)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### OS:

Red Hat Enterprise Linux 9.2 (Plow)

Kernel 5.14.0-284.11.1.el9\_2.x86\_64

C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;

No

Lenovo BIOS Version ESE121V 3.10 released Jan-2024

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

BIOS and OS set to prefer performance at the cost of additional power usage

Parallel:

Firmware:

File System:

System State:

Base Pointers:

Peak Pointers:

Other:

Power Management:



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

**SPECrate®2017\_int\_base = 200**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	512	149	512	149	<b>512</b>	<b>149</b>							
502.gcc_r	48	391	174	396	172	<b>394</b>	<b>173</b>							
505.mcf_r	48	<b>230</b>	<b>337</b>	230	337	230	337							
520.omnetpp_r	48	<b>433</b>	<b>145</b>	434	145	432	146							
523.xalancbmk_r	48	181	281	<b>180</b>	<b>281</b>	180	281							
525.x264_r	48	218	385	<b>218</b>	<b>385</b>	218	385							
531.deepsjeng_r	48	<b>386</b>	<b>142</b>	386	142	386	143							
541.leela_r	48	<b>594</b>	<b>134</b>	594	134	593	134							
548.exchange2_r	48	306	410	<b>307</b>	<b>409</b>	307	409							
557.xz_r	48	531	97.7	535	97.0	<b>532</b>	<b>97.5</b>							

**SPECrate®2017\_int\_base = 200**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.
  9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
C-States set to Legacy  
LLC Prefetch set to Disabled  
SNC set to SNC2

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jan 19 04:33:23 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 252 (252-13.el9\_2)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. tuned-adm active
  17. sysctl
  18. /sys/kernel/mm/transparent\_hugepage
  19. /sys/kernel/mm/transparent\_hugepage/khugepaged
  20. OS release
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.el9\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT  
2023 x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
04:33:23 up 2:55, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 01:38 43.00s 0.88s 0.01s -bash

-----

3. Username  
From environment variable \$USER: root

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
4. ulimit -a
real-time non-blocking time  (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals              (-i) 1030458
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes           (-u) 1030458
virtual memory               (-v) unlimited
file locks                  (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.128/templogs/preenv.intrate.128.0.log --lognum 128.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6403N
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode      : 0x2b000571
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brs
cpu cores      : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 0: apicids 0-47
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
7. lscpu
```

From lscpu from util-linux 2.37.4:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6403N
BIOS Model name: Intel(R) Xeon(R) Gold 6403N
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 1
Stepping: 8
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
      smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
      cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbninvd dtherm ida
      arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
      bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
      tsxldtrk pconfig arch_lbr ibt avx512_fp16 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 48 MiB (24 instances)
L3 cache: 45 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K      1.1M   12 Data          1       64           1            64

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

### Platform Notes (Continued)

L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	45M	45M	15	Unified	3	49152	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0-11,24-35  
node 0 size: 128643 MB  
node 0 free: 127813 MB  
node 1 cpus: 12-23,36-47  
node 1 size: 129013 MB  
node 1 free: 128164 MB  
node distances:  
node 0 1  
0: 10 12  
1: 12 10

-----  
9. /proc/meminfo

MemTotal: 263840748 kB

-----  
10. who -r  
run-level 3 Jan 19 01:38

-----  
11. Systemd service manager version: systemd 252 (252-13.el9\_2)

Default Target Status  
multi-user degraded

-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* dnf-makecache.service loaded failed dnf makecache

-----  
13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chrony cron dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmeffc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cupower debug-shell dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiuiio kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-boot-connections pesign psacct rdisc rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9\_2.x86\_64  
root=/dev/mapper/rhel-root

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 3.60 GHz and 3.60 GHz.
    The governor "performance" may decide which speed to use
    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
16. tuned-adm active
Current active profile: throughput-performance

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

-----
18. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

-----  
20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.2 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)  
system-release Red Hat Enterprise Linux release 9.2 (Plow)

-----  
21. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 819G 54G 765G 7% /home

-----  
22. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U  
Product Family: ThinkSystem  
Serial: 1234567890

-----  
23. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
1x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800, configured at 4000  
2x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800, configured at 4000  
5x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800, configured at 4000

-----  
24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: ESE121V-3.10  
BIOS Date: 01/09/2024  
BIOS Revision: 3.10  
Firmware Revision: 3.90

## Compiler Version Notes

=====| 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====| 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====| 548.exchange2\_r(base)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Gold 6403N)

SPECrate®2017\_int\_base = 200

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-19 04:33:23-0500.

Report generated on 2024-02-14 13:39:40 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-14.