



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S, 2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

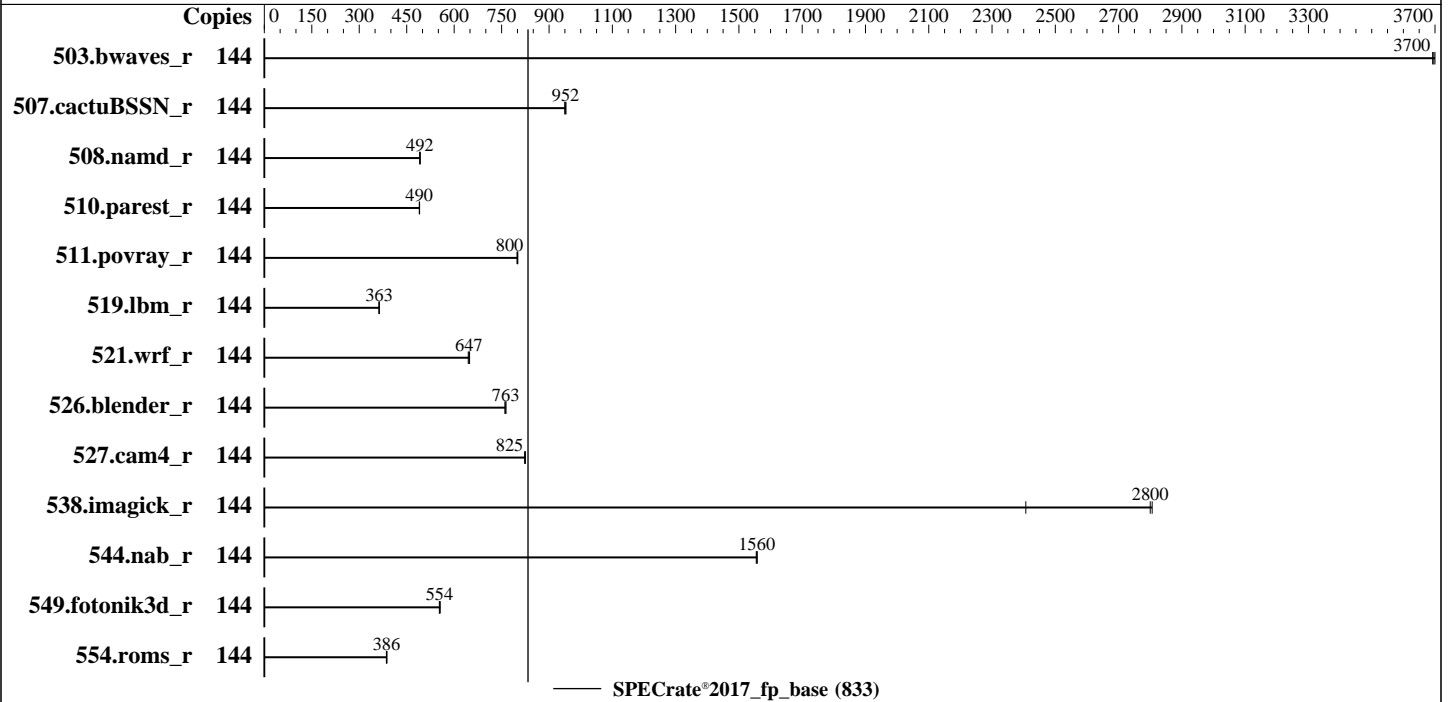

Hardware

CPU Name: Intel Xeon Gold 6554S
 Max MHz: 4000
 Nominal: 2200
 Enabled: 72 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 180 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
 Storage: 1 x SATA SSD, 1.92TB
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R2.4.0 for D3985-A1x. Released May-2024 tested as V1.0.0.0 R2.3.1 for D3985-A1x Mar-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: May-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	390	3700	<u>391</u>	<u>3700</u>	391	3690							
507.cactuBSSN_r	144	192	949	<u>191</u>	<u>952</u>	191	953							
508.namd_r	144	278	493	<u>278</u>	<u>492</u>	279	491							
510.parest_r	144	<u>769</u>	<u>490</u>	768	491	769	490							
511.povray_r	144	<u>420</u>	<u>800</u>	420	801	421	799							
519.lbm_r	144	418	363	<u>418</u>	<u>363</u>	418	363							
521.wrf_r	144	497	649	<u>499</u>	<u>647</u>	500	644							
526.blender_r	144	<u>287</u>	<u>763</u>	287	763	288	760							
527.cam4_r	144	305	825	306	823	<u>305</u>	<u>825</u>							
538.imagick_r	144	128	2810	<u>128</u>	<u>2800</u>	149	2410							
544.nab_r	144	156	1560	<u>156</u>	<u>1560</u>	156	1550							
549.fotonik3d_r	144	1014	553	<u>1014</u>	<u>554</u>	1009	556							
554.roms_r	144	593	386	590	388	<u>592</u>	<u>386</u>							

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile throughput-performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/benchmark/speccpu-24.0/lib/intel64:/home/benchmark/speccpu-24.0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
 Intel Virtualization Technology = Disabled
 Utilization Profile = Unbalanced
 CPU Performance Boost = Aggressive
 SNC (Sub NUMA) = Enable SNC2
 Fan Control = Full

Sysinfo program /home/benchmark/speccpu-24.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu Mar 28 02:31:46 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

 1. uname -a
 Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
 x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: May-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```
2. w
   02:31:46 up 4:47, 1 user, load average: 0.57, 47.11, 99.18
USER  TTY      FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1    -             21:44   4:44m  1.02s  0.19s -bash
```

```
3. Username
   From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4124903
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124903
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu-24.0
```

```
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6554S
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 36
siblings       : 72
2 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-35
physical id 1: core ids 0-35
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S, 2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: May-2024
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: apicids 0-71
physical id 1: apicids 128-199

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      144
On-line CPU(s) list:        0-143
Vendor ID:                   GenuineIntel
Model name:                  INTEL(R) XEON(R) GOLD 6554S
CPU family:                  6
Model:                      207
Thread(s) per core:         2
Core(s) per socket:         36
Socket(s):                   2
Stepping:                   2
CPU max MHz:                 4000.0000
CPU min MHz:                 800.0000
BogoMIPS:                   4400.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                             lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                             nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                             ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                             x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                             abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                             cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                             avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                             xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                             hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                             avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                             avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                             enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                             amx_tile flush_lld arch_capabilities

L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   2.3 MiB (72 instances)
L2 cache:                    144 MiB (72 instances)
L3 cache:                    360 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-17,72-89
NUMA node1 CPU(s):          18-35,90-107
NUMA node2 CPU(s):          36-53,108-125
NUMA node3 CPU(s):          54-71,126-143
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: May-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	180M	360M	20	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-17,72-89
node 0 size: 257619 MB
node 0 free: 255700 MB
node 1 cpus: 18-35,90-107
node 1 size: 258004 MB
node 1 free: 256826 MB
node 2 cpus: 36-53,108-125
node 2 size: 258038 MB
node 2 free: 256894 MB
node 3 cpus: 54-71,126-143
node 3 size: 257592 MB
node 3 free: 256409 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056005584 kB

10. who -r

run-level 3 Mar 27 21:44

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels
rollback rsyslog sep5 smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                 chrontd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                 firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
                 kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                 serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                 systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
                 vncserver@
indirect         wickedd

```

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=87f6e000-dba2-474c-9bb5-7d0e1b533f58
splash=silent
quiet
security=apparmor
crashkernel=407M,high
crashkernel=72M,low
mitigations=auto

```

15. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

16. tuned-adm active

Current active profile: throughput-performance

17. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

18. /sys/kernel/mm/transparent_hugepage

defrag always defer defer+madvice [madvice] never

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

```
-----
21. Disk information
SPEC is set to: /home/benchmark/speccpu-24.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 741G 72G 669G 10% /home
```

```
-----
22. /sys/devices/virtual/dmi/id
Vendor: FUJITSU
Product: PRIMERGY TX2550 M7
Product Family: SERVER
Serial: EWCCxxxxxx
```

```
-----
23. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Hynix HMC94AGBRA181N 64 GB 2 rank 5600, configured at 5200
```

```
-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R2.3.1 for D3985-A1x
BIOS Date: 03/19/2024
BIOS Revision: 2.3
Firmware Revision: 2.36
```

Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: May-2024
Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
 507.cactuBSSN_r: -DSPEC_LP64
 508.namd_r: -DSPEC_LP64
 510.parest_r: -DSPEC_LP64
 511.povray_r: -DSPEC_LP64
 519.lbm_r: -DSPEC_LP64
 521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
 527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
 -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
 -ffast-math -flto -mfpmath=sse -funroll-loops
 -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
 -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
 -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M7, Intel Xeon Gold 6554S,
2.20GHz

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-27 13:31:46-0400.

Report generated on 2024-04-24 14:35:39 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.