



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C3R-28  
(2.00 GHz, Intel Xeon Gold 6438Y+)

SPECrate®2017\_int\_base = 497

SPECrate®2017\_int\_peak = 513

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

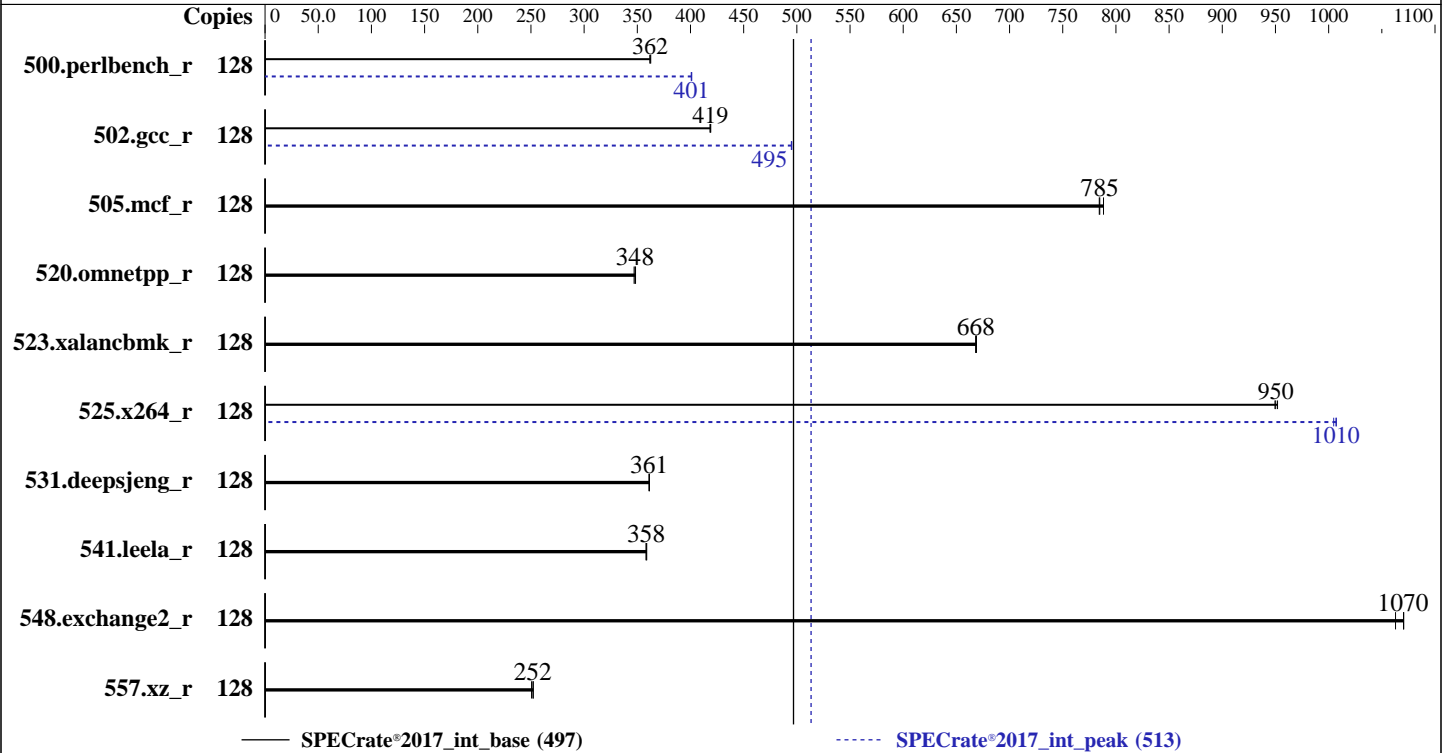

### Hardware

CPU Name: Intel Xeon Gold 6438Y+  
 Max MHz: 4000  
 Nominal: 2000  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800AA-R)  
 Storage: 1 x 960 GB NVMe  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
 5.14.0-362.13.1.el9\_3.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.1 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>563</b>	<b>362</b>	563	362	562	363	128	<b>508</b>	<b>401</b>	508	401	508	401
502.gcc_r	128	<b>433</b>	<b>419</b>	433	419	433	418	128	366	495	<b>366</b>	<b>495</b>	366	495
505.mcf_r	128	262	788	264	784	<b>264</b>	<b>785</b>	128	262	788	264	784	<b>264</b>	<b>785</b>
520.omnetpp_r	128	484	347	<b>483</b>	<b>348</b>	482	348	128	484	347	<b>483</b>	<b>348</b>	482	348
523.xalancbmk_r	128	<b>202</b>	<b>668</b>	202	669	202	668	128	<b>202</b>	<b>668</b>	202	669	202	668
525.x264_r	128	235	952	<b>236</b>	<b>950</b>	236	950	128	223	1010	223	1000	<b>223</b>	<b>1010</b>
531.deepsjeng_r	128	406	361	406	361	<b>406</b>	<b>361</b>	128	406	361	406	361	<b>406</b>	<b>361</b>
541.leela_r	128	591	359	592	358	<b>592</b>	<b>358</b>	128	591	359	592	358	<b>592</b>	<b>358</b>
548.exchange2_r	128	316	1060	313	1070	<b>313</b>	<b>1070</b>	128	316	1060	313	1070	<b>313</b>	<b>1070</b>
557.xz_r	128	548	252	552	251	<b>549</b>	<b>252</b>	128	548	252	552	251	<b>549</b>	<b>252</b>

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
KTI Prefetch = Enable  
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Feb 22 17:53:49 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-362.13.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Nov 24 01:57:57 EST  
2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
17:53:49 up 8 min, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 17:51 5.00s 0.83s 0.01s -bash  
-----

-----  
3. Username  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Platform Notes (Continued)

From environment variable \$USER: root

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126689
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126689
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/tempslogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6438Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6438Y+
BIOS Model name:      Intel(R) Xeon(R) Gold 6438Y+
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
Stepping:              8
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                    rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                    xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                    dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                    pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                    avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                    cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                    ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                    tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512dq
                    rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                    avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                    cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                    wbnoinvd dtherm ida arat pln pts hfi vnni avx512vbmi umip pku ospke
                    waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                    avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                    avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31,64-95
NUMA node1 CPU(s):    32-63,96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                    PBRB-eIBRS SW sequence

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 515664 MB
node 0 free: 513754 MB
node 1 cpus: 32-63,96-127
node 1 size: 516074 MB
node 1 free: 514853 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

9. /proc/meminfo

MemTotal: 1056500028 kB

10. who -r

run-level 3 Feb 22 17:45

11. Systemd service manager version: systemd 252 (252-18.el9)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpchbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvmmf-autoconnect ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**  
**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

indirect  
speech-dispatcherd srp\_daemon srp\_daemon\_port@ sshd-keygen@ systemd-boot-check-no-failures  
systemd-nspawn@ systemd-pstore systemd-sysext target targetclid tog-pegasus trace-cmd  
virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtsecret d virtstoraged  
vsftpd wpa\_supplicant  
pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-362.13.1.el9\_3.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 4.00 GHz and 4.00 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

-----  
19. OS release

```
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.3 (Plow)
redhat-release Red Hat Enterprise Linux release 9.3 (Plow)
system-release Red Hat Enterprise Linux release 9.3 (Plow)
```

-----  
20. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 856G 398G 459G 47% /home
```

-----  
21. /sys/devices/virtual/dmi/id

```
Vendor: Tyrone Systems
Product: Tyrone Camarero SDI200C3R-28
Product Family: Family
Serial: 2X21292023D
```

-----  
22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
```

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.1
BIOS Date: 12/07/2023
BIOS Revision: 5.32
```

## Compiler Version Notes

=====
C | 502.gcc\_r(peak)
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**  
**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C3R-28**  
(2.00 GHz, Intel Xeon Gold 6438Y+)

**SPECrate®2017\_int\_base = 497**

**SPECrate®2017\_int\_peak = 513**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-22 07:23:48-0500.

Report generated on 2024-05-21 10:25:25 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-18.