



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573


Test Date: Apr-2024

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

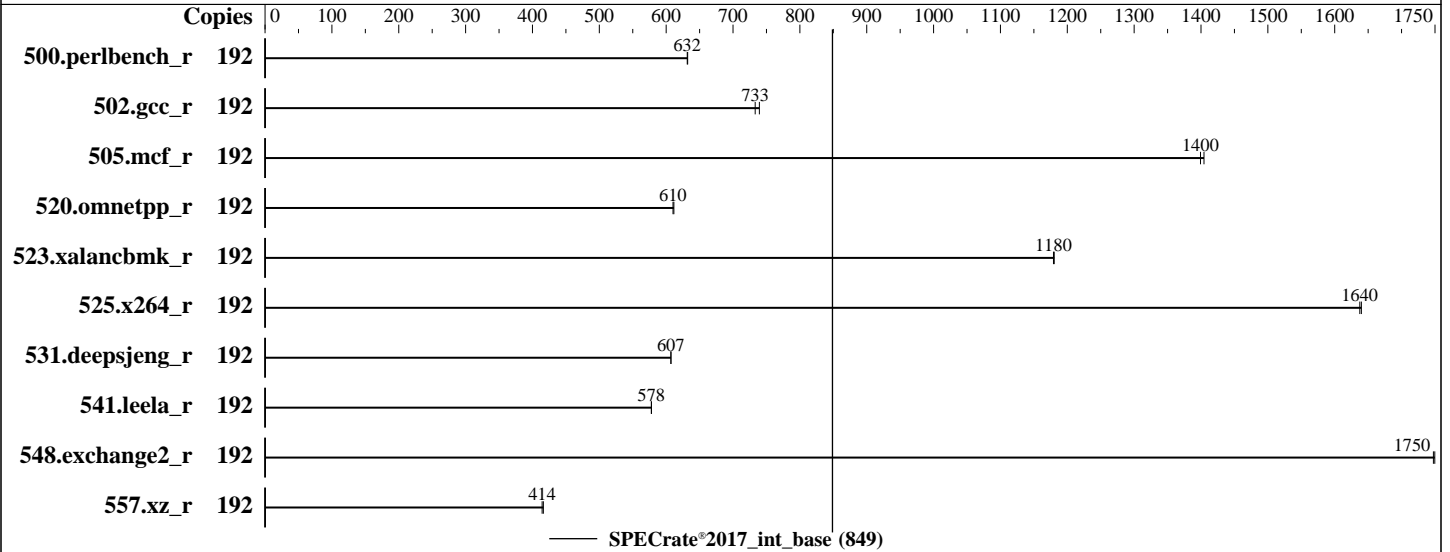

Hardware

CPU Name: Intel Xeon Gold 6418H
 Max MHz: 4000
 Nominal: 2100
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 110 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.7.6 released Jan-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	484	632	484	632									
502.gcc_r	192	371	733	368	739									
505.mcf_r	192	222	1400	221	1400									
520.omnetpp_r	192	412	612	413	610									
523.xalancbmk_r	192	172	1180	172	1180									
525.x264_r	192	205	1640	205	1640									
531.deepsjeng_r	192	362	607	362	607									
541.leela_r	192	550	578	550	578									
548.exchange2_r	192	288	1750	288	1750									
557.xz_r	192	498	416	500	414									

SPECrate®2017_int_base = 849

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

Benchmark run from a 110 GB ramdisk created with the cmd: "mount -t tmpfs -o size=110G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
      Uncorrectable Memory Error : Disabled

      DCU Streamer Prefetcher : Disabled
      Sub NUMA Cluster : 2-way Clustering
      LLC Prefetch : Disabled
      Dead Line LLC Alloc : Disabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      C1E : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled
      Optimizer Mode : Enabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Wed Apr 17 02:32:31 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

22. BIOS

```

-----
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
-----

2. w
02:32:31 up 1 min, 1 user, load average: 0.47, 0.17, 0.06
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1    -                02:31   23.00s 1.04s  0.01s /bin/bash
/home/DellFiles/bin/Intel/dell-run-specpcpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt --tune base
-----

3. Username
From environment variable $USER: root
-----

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 8252876
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 8252876
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
-----

5. sysinfo process ancestry
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./DELL_rate.sh --tune base
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate --tune base
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate --tune base
/bin/bash /home/DellFiles/bin/Intel/dell-run-specpcpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc
--define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt
--tune base
/bin/bash /home/DellFiles/bin/Intel/dell-run-specpcpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc
--define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt
--tune base
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-4S=1 --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt --tune base intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define DL-4S=1
--define DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt --tune base --nopower
--runmode rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6418H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 24
siblings       : 48
4 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 2: core ids 0-23
physical id 3: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
physical id 2: apicids 256-303
physical id 3: apicids 384-431
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6418H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 4
Stepping: 8
CPU max MHz: 4000.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu_vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities VT-x

Virtualization:

L1d cache: 4.5 MiB (96 instances)
 L1i cache: 3 MiB (96 instances)
 L2 cache: 192 MiB (96 instances)
 L3 cache: 240 MiB (4 instances)
 NUMA node(s): 8
 NUMA node0 CPU(s): 0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 84, 92, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 180, 188
 NUMA node1 CPU(s): 4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 80, 88, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, 176, 184
 NUMA node2 CPU(s): 1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137, 145, 153, 161, 169, 177, 185
 NUMA node3 CPU(s): 5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141, 149, 157, 165, 173, 181, 189
 NUMA node4 CPU(s): 2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, 178, 186
 NUMA node5 CPU(s): 6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142, 150, 158, 166, 174, 182, 190
 NUMA node6 CPU(s): 3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139, 147, 155, 163, 171, 179, 191
 NUMA node7 CPU(s): 7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127, 135, 143, 151, 159, 167, 175, 183, 187
 Vulnerability Itlb multihit: Not affected
 Vulnerability L1tf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
 node 0 cpus: 0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 84, 92, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 180, 188
 node 0 size: 257386 MB
 node 0 free: 250379 MB
 node 1 cpus: 4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 80, 88, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, 176, 184

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

node 1 size: 258041 MB
node 1 free: 257527 MB
node 2 cpus: 1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185
node 2 size: 258041 MB
node 2 free: 254275 MB
node 3 cpus: 5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189
node 3 size: 258041 MB
node 3 free: 249148 MB
node 4 cpus: 2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186
node 4 size: 258041 MB
node 4 free: 251139 MB
node 5 cpus: 6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190
node 5 size: 258041 MB
node 5 free: 257492 MB
node 6 cpus: 3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,191
node 6 size: 258041 MB
node 6 free: 257230 MB
node 7 cpus: 7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,187
node 7 size: 257612 MB
node 7 free: 257025 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 21 21 21 21 21 21
1:  12 10 21 21 21 21 21 21
2:  21 21 10 12 21 21 21 21
3:  21 21 12 10 21 21 21 21
4:  21 21 21 21 10 12 21 21
5:  21 21 21 21 12 10 21 21
6:  21 21 21 21 21 21 10 12
7:  21 21 21 21 21 21 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      2112767708 kB

```

```

-----
10. who -r
    run-level 3 Apr 17 02:31

```

```

-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd
nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime                     systemd-remount-fs
disabled                             autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
vncserver@

indirect                             wickedd

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=893df238-76cf-4e2c-9a9f-c2a0607a3ac0
linux
splash=silent
resume=/dev/disk/by-uuid/5c615f9e-f05b-4599-88a9-51ccf1033619
mitigations=auto
quiet
security=apparmor
crashkernel=390M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 110G 4.1G 106G 4% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R960
Product Family: PowerEdge
Serial: BL1X7V3

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x 00AD063200AD HMC94AEBRA109N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.7.6
BIOS Date: 01/11/2024
BIOS Revision: 1.7

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 849

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-17 03:32:31-0400.

Report generated on 2024-05-07 22:15:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.