



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation


ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

CPU2017 License: 9061  
Test Sponsor: ZTE Corporation  
Tested by: ZTE Corporation

Test Date: May-2024  
Hardware Availability: Jan-2023  
Software Availability: Dec-2023

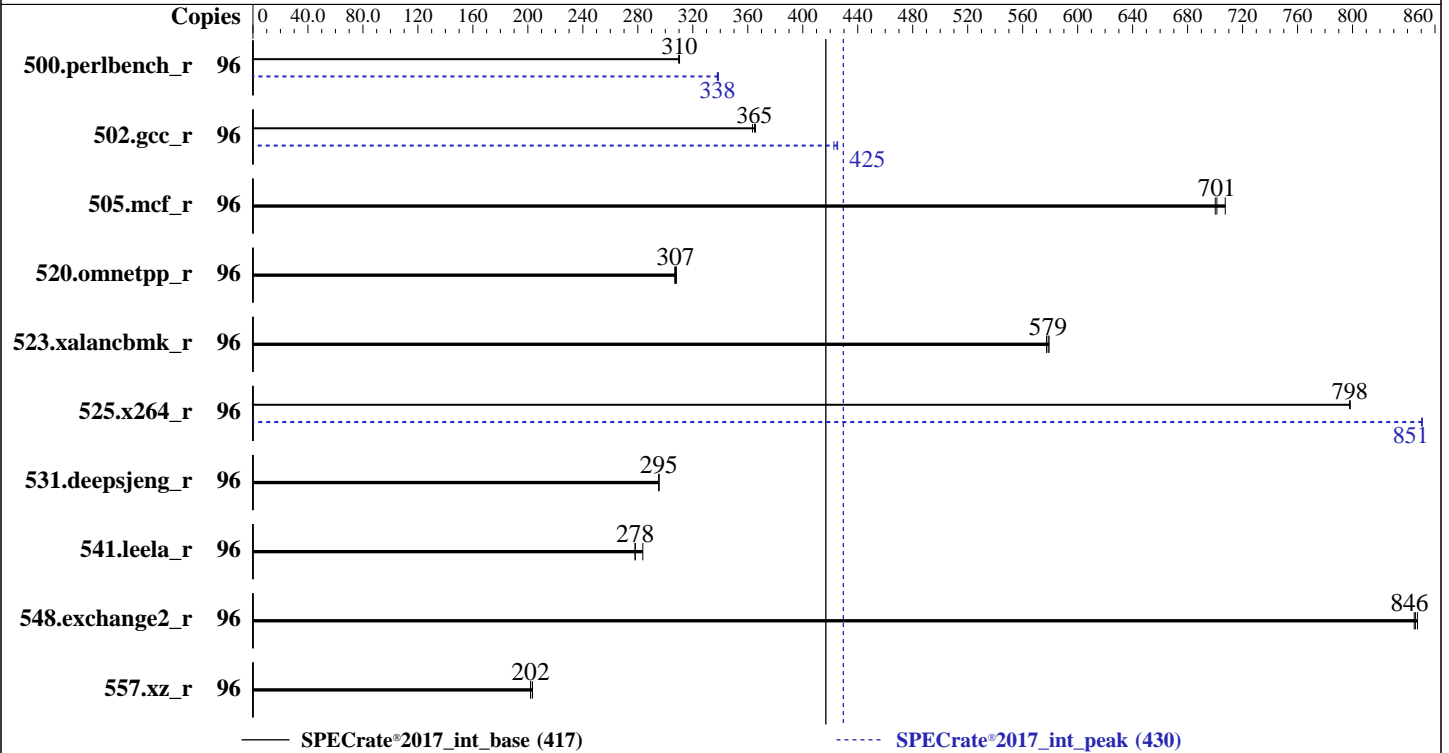

### Hardware

CPU Name: Intel Xeon Gold 5418Y  
Max MHz: 3800  
Nominal: 2000  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 45 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
5.14.21-150500.53-default  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version 04.24.01.10 released Mar-2024  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

CPU2017 License: 9061  
Test Sponsor: ZTE Corporation  
Tested by: ZTE Corporation

Test Date: May-2024  
Hardware Availability: Jan-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	493	310	492	310	<b>493</b>	<b>310</b>	96	451	339	<b>452</b>	<b>338</b>	452	338
502.gcc_r	96	<b>372</b>	<b>365</b>	374	363	372	366	96	320	425	<b>320</b>	<b>425</b>	322	423
505.mcf_r	96	<b>221</b>	<b>701</b>	219	707	222	700	96	<b>221</b>	<b>701</b>	219	707	222	700
520.omnetpp_r	96	409	308	410	307	<b>410</b>	<b>307</b>	96	409	308	410	307	<b>410</b>	<b>307</b>
523.xalancbmk_r	96	176	577	175	579	<b>175</b>	<b>579</b>	96	176	577	175	579	<b>175</b>	<b>579</b>
525.x264_r	96	211	798	<b>211</b>	<b>798</b>	211	798	96	198	851	<b>198</b>	<b>851</b>	198	850
531.deepsjeng_r	96	373	295	<b>372</b>	<b>295</b>	372	295	96	373	295	<b>372</b>	<b>295</b>	372	295
541.leela_r	96	572	278	561	284	<b>572</b>	<b>278</b>	96	572	278	561	284	<b>572</b>	<b>278</b>
548.exchange2_r	96	<b>297</b>	<b>846</b>	298	845	297	847	96	<b>297</b>	<b>846</b>	298	845	297	847
557.xz_r	96	510	203	513	202	<b>513</b>	<b>202</b>	96	510	203	513	202	<b>513</b>	<b>202</b>

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec2017/lib/intel64:/home/spec2017/lib/ia32:/home/spec2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

### General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Configuration:  
ENERGY\_PERF\_BIAS\_CFG mode = performance  
LLC dead line alloc = Disabled  
Patrol Scrub = Disabled  
Intel VT for Directed I/O (VT-d) = Disabled  
SR-IOV Support = Disabled  
Sub NUMA(SNC) = Enable SNC2

Sysinfo program /home/spec2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue May 21 04:00:28 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
04:00:28 up 3 min, 1 user, load average: 0.12, 0.20, 0.09  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 198.168.111.123 03:59 12.00s 1.17s 0.00s /bin/sh  
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2060363
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2060363
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
/bin/sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 5418Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 7
microcode     : 0x2b000571
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 5418Y
CPU family:             6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:              7
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                        sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                        hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_llc arch_capabilities

L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              90 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
NUMA node3 CPU(s):    36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128493 MB
node 0 free: 127573 MB
node 1 cpus: 12-23,60-71
node 1 size: 129017 MB
node 1 free: 127886 MB
node 2 cpus: 24-35,72-83
node 2 size: 129017 MB
node 2 free: 127264 MB
node 3 cpus: 36-47,84-95
node 3 size: 128593 MB
node 3 free: 128087 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527484788 kB

10. who -r

run-level 3 May 21 03:59 last=5

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default	Target	Status
graphical		running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievd irqbindall issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
serial-getty@ set_kthread_prio smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
wpa_supplicant@
indirect pcsd saned@ wickedd
```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=66f36b99-6e13-4e26-a963-3ca58607d8e9
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=404M,high
crashkernel=72M,low
```

-----  
14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5  
-----

-----  
19. Disk information  
SPEC is set to: /home/spec2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 btrfs 811G 32G 779G 4% /home  
-----

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: ZTE  
Product: R5300 G5  
Product Family: Server  
Serial: 219440501031  
-----

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800, configured at 4400  
-----

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 04.24.01.10  
BIOS Date: 03/13/2024  
BIOS Revision: 4.24  
-----

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

### Compiler Version Notes (Continued)

-----  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Base Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(2.00 GHz, Intel Xeon Gold 5418Y)

SPECrate®2017\_int\_base = 417

SPECrate®2017\_int\_peak = 430

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.11.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-20 16:00:28-0400.

Report generated on 2024-06-24 10:35:47 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-18.