



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

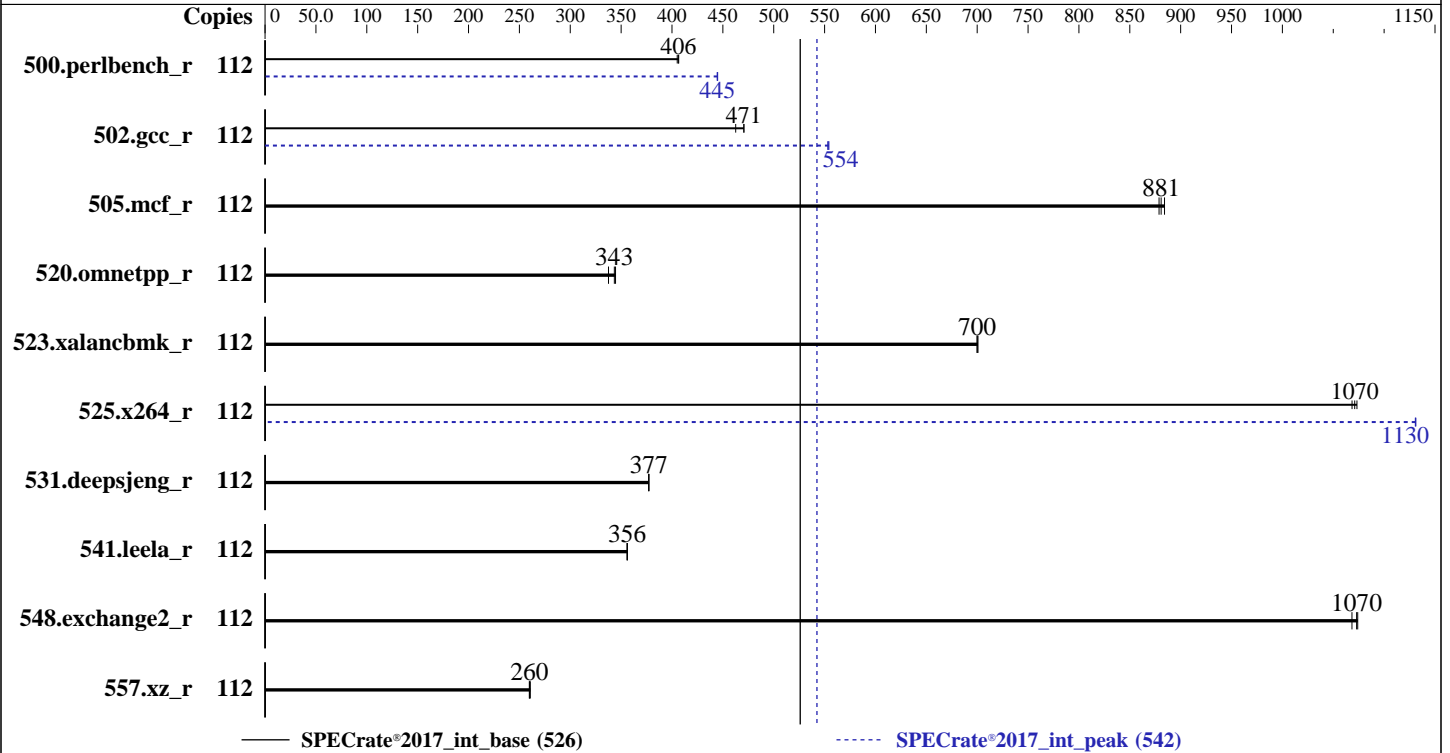

Hardware

CPU Name: Intel Xeon Gold 5520+
 Max MHz: 4000
 Nominal: 2200
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 52.5 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 4800)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.01.03.05 Released Apr-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	440	405	439	407	439	406	112	401	444	401	445	401	445
502.gcc_r	112	343	463	337	471	337	471	112	286	554	286	554	287	553
505.mcf_r	112	205	881	205	884	206	879	112	205	881	205	884	206	879
520.omnetpp_r	112	427	344	435	338	428	343	112	427	344	435	338	428	343
523.xalancbmk_r	112	169	700	169	701	169	700	112	169	700	169	701	169	700
525.x264_r	112	184	1070	183	1070	183	1070	112	173	1130	173	1130	173	1130
531.deepsjeng_r	112	340	377	340	377	340	377	112	340	377	340	377	340	377
541.leela_r	112	521	356	521	356	521	356	112	521	356	521	356	521	356
548.exchange2_r	112	275	1070	273	1070	273	1070	112	275	1070	273	1070	273	1070
557.xz_r	112	464	261	466	260	465	260	112	464	261	466	260	465	260

SPECrate®2017_int_base = 526

SPECrate®2017_int_peak = 542

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-111

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/2023/lib/intel64:/home/2023/lib/ia32:/home/2023/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)
LLC Prefetch Set to Disabled
LLC dead line alloc Set to Disabled
Stale AtoS Set to Disabled

Sysinfo program /home/2023/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu May 30 08:10:04 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
08:10:04 up 1:07, 1 user, load average: 0.09, 17.79, 59.89
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 07:02 12.00s 1.17s 0.17s -bash

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

-----
3. Username
   From environment variable $USER:  root

-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority         (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals            (-i) 2060185
   max locked memory          (kbytes, -l) 8192
   max memory size            (kbytes, -m) unlimited
   open files                 (-n) 1024
   pipe size                  (512 bytes, -p) 8
   POSIX message queues       (bytes, -q) 819200
   real-time priority         (-r) 0
   stack size                 (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes         (-u) 2060185
   virtual memory             (kbytes, -v) unlimited
   file locks                 (-x) unlimited

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 31
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root [priv]
   sshd: root@pts/0
   -bash
   sh 1.sh
   sh run_rate_ic2023.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
     ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=56 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
     ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=56 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
     --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
   speperl $SPEC/bin/sysinfo
   $SPEC = /home/2023

-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) GOLD 5520+
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 28
   siblings       : 56
   2 physical ids (chips)
   112 processors (hardware threads)
   physical id 0: core ids 0-27
   physical id 1: core ids 0-27

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: apicids 0-55
physical id 1: apicids 128-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) GOLD 5520+
BIOS Model name:      INTEL(R) XEON(R) GOLD 5520+
CPU family:            6
Model:                 207
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):             2
Stepping:              2
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                    vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                    cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vmmi flexpriority
                    ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                    rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                    avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                    cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                    dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                    gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                    rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                    amx_int8 flush_l1d arch_capabilities

Virtualization:       VT-x
L1d cache:            2.6 MiB (56 instances)
L1i cache:            1.8 MiB (56 instances)
L2 cache:             112 MiB (56 instances)
L3 cache:             105 MiB (2 instances)
NUMA node(s):        4
NUMA node0 CPU(s):   0-13,56-69
NUMA node1 CPU(s):   14-27,70-83
NUMA node2 CPU(s):   28-41,84-97
NUMA node3 CPU(s):   42-55,98-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	52.5M	105M	15	Unified	3	57344	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-13,56-69
node 0 size: 128075 MB
node 0 free: 127302 MB
node 1 cpus: 14-27,70-83
node 1 size: 129017 MB
node 1 free: 128292 MB
node 2 cpus: 28-41,84-97
node 2 size: 128978 MB
node 2 free: 128304 MB
node 3 cpus: 42-55,98-111
node 3 size: 129012 MB
node 3 free: 128415 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10
```

9. /proc/meminfo

MemTotal: 527446960 kB

10. who -r

run-level 3 May 30 07:02

11. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

```
UNIT LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time
```

13. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

enabled-runtime  sep5 sshd sssd sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower
disabled         systemd-remount-fs
                 canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                 chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat
                 man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
                 selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                 systemd-pstore systemd-sysex
indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                 systemd-sysupdate-reboot

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt5)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=UUID=e7cc1b7d-5946-4ed4-8306-b2d382dc5709
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=937c2e4e-930c-4489-9a6c-cd05c9a2c08a
nohz_full=1-111

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                1
   max_ptes_none         511
   max_ptes_shared       256
   max_ptes_swap         64
   pages_to_scan         4096
   scan_sleep_millisecs 10000

```

```

20. OS release
   From /etc/*-release /etc/*-version
   os-release           Red Hat Enterprise Linux 9.2 (Plow)
   redhat-release       Red Hat Enterprise Linux release 9.2 (Plow)
   system-release       Red Hat Enterprise Linux release 9.2 (Plow)

```

```

21. Disk information
   SPEC is set to: /home/2023
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda5        xfs   690G 121G 570G  18% /

```

```

22. /sys/devices/virtual/dmi/id
   Product:          5288 V7
   Product Family:   Eagle Stream

```

```

23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     6x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 4800
     8x Samsung M321R4GA3PB0-CWMJH 32 GB 2 rank 5600, configured at 4800
     2x Samsung M321R4GA3PB0-CWMKH 32 GB 2 rank 5600, configured at 4800

```

```

24. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      INSYDE Corp.
   BIOS Version:     01.01.03.05
   BIOS Date:        04/12/2024
   BIOS Revision:    3.5

```

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Portability Flags (Continued)

```
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallo
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 526

FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_int_peak = 542

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-29 20:10:04-0400.

Report generated on 2024-06-24 10:40:16 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-18.