



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

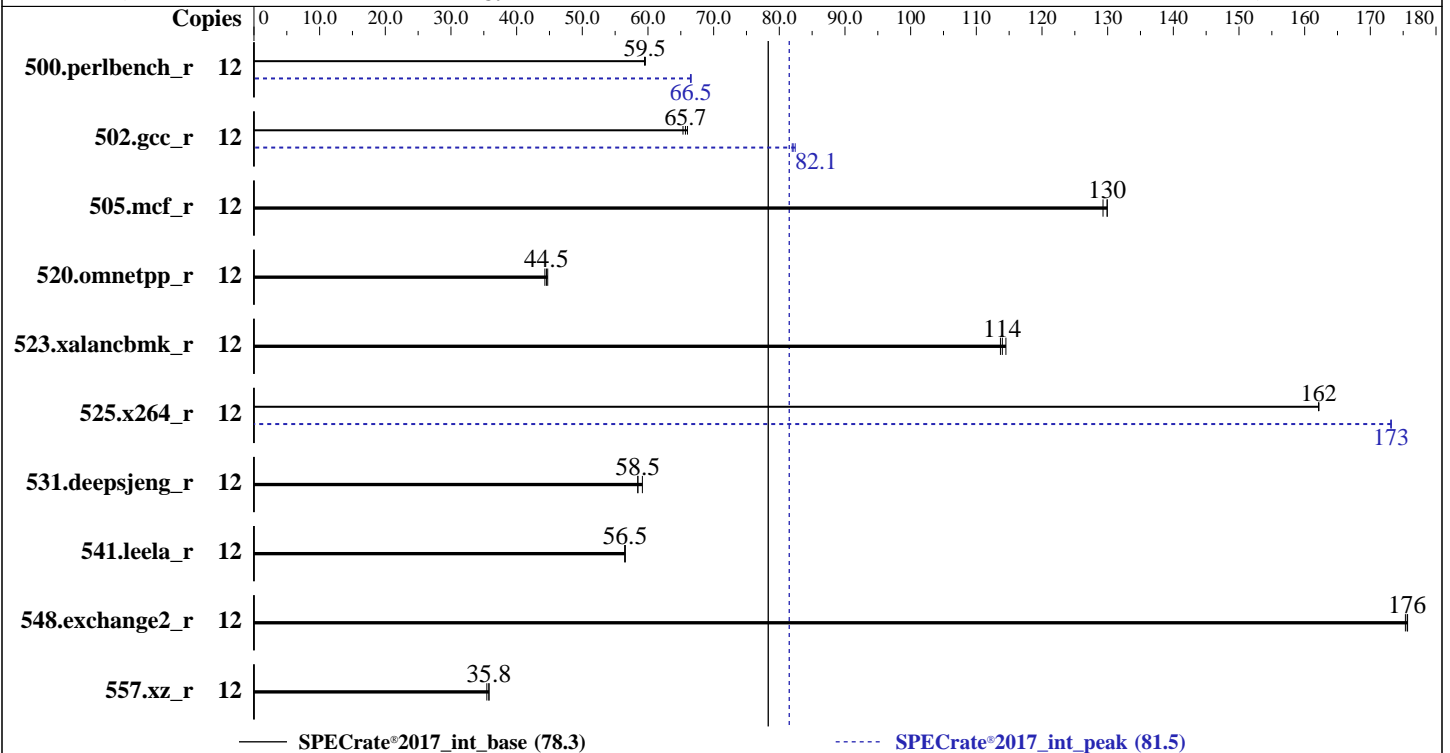

Hardware

CPU Name: Intel Xeon E-2486
 Max MHz: 5600
 Nominal: 3500
 Enabled: 6 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 18 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version CTE105H 1.10 released Mar-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	321	59.6	<u>321</u>	<u>59.5</u>	321	59.5	12	287	66.5	<u>287</u>	<u>66.5</u>	287	66.6
502.gcc_r	12	<u>259</u>	<u>65.7</u>	257	66.0	260	65.3	12	207	82.0	206	82.4	<u>207</u>	<u>82.1</u>
505.mcf_r	12	<u>149</u>	<u>130</u>	150	129	149	130	12	<u>149</u>	<u>130</u>	150	129	149	130
520.omnetpp_r	12	355	44.3	<u>353</u>	<u>44.5</u>	352	44.7	12	355	44.3	<u>353</u>	<u>44.5</u>	352	44.7
523.xalancbmk_r	12	111	115	<u>111</u>	<u>114</u>	111	114	12	111	115	<u>111</u>	<u>114</u>	111	114
525.x264_r	12	130	162	130	162	<u>130</u>	<u>162</u>	12	121	173	121	173	<u>121</u>	<u>173</u>
531.deepsjeng_r	12	<u>235</u>	<u>58.5</u>	232	59.1	235	58.5	12	<u>235</u>	<u>58.5</u>	232	59.1	235	58.5
541.leela_r	12	352	56.5	<u>352</u>	<u>56.5</u>	352	56.5	12	352	56.5	<u>352</u>	<u>56.5</u>	352	56.5
548.exchange2_r	12	179	175	179	176	<u>179</u>	<u>176</u>	12	179	175	179	176	<u>179</u>	<u>176</u>
557.xz_r	12	362	35.8	365	35.5	<u>362</u>	<u>35.8</u>	12	362	35.8	365	35.5	<u>362</u>	<u>35.8</u>

SPECrate®2017_int_base = **78.3**

SPECrate®2017_int_peak = **81.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/lib/ia32:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance
Adjacent Cache Prefetch set to Disabled
Turbo Limit for 95W CPU set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed May 15 04:48:18 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
04:48:18 up 12:46, 1 user, load average: 8.11, 11.08, 11.70
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - Tue16 4:12m 0.59s 0.00s /bin/bash ./rate_int.sh
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 78.3

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size          (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 256771
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 256771
   virtual memory         (kbytes, -v) unlimited
   file locks            (-x) unlimited

-----

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   /bin/bash ./rate_int.sh
   /bin/bash ./rate_int.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
     ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=12 --define physicallogical
     --define no-numa --tune base,peak -o all --define drop_caches intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
     ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=12 --define physicallogical
     --define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
     base:peak --size refrate intrate --nopreenv --note-preenv --logfile
     $$SPEC/tmp/CPU2017.184/templogs/preenv.intrate.184.0.log --lognum 184.0 --from_runcpu 2
   specperl $$SPEC/bin/sysinfo
   $$SPEC = /home/cpu2017-1.1.9-ic2024.0.2

-----

6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) E E-2486
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 183
   stepping       : 1
   microcode      : 0x11f
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 6
   siblings       : 12
   1 physical ids (chips)
   12 processors (hardware threads)
   physical id 0: core ids 0-5
   physical id 0: apicids 0-11
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

-----

7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:          x86_64
   CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 78.3

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017

Test Date: May-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```

Address sizes:                42 bits physical, 48 bits virtual
Byte Order:                   Little Endian
CPU(s):                        12
On-line CPU(s) list:          0-11
Vendor ID:                     GenuineIntel
Model name:                    Intel(R) Xeon(R) E E-2486
CPU family:                    6
Model:                          183
Thread(s) per core:           2
Core(s) per socket:           6
Socket(s):                     1
Stepping:                      1
BogoMIPS:                      6988.80
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                                ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                                tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                                clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                                avx_vnni dtherm ida arat pln pts hfi umip pku ospke waitpkg gfni vaes
                                vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig
                                arch_lbr flush_lld arch_capabilities

Virtualization:                VT-x
L1d cache:                     288 KiB (6 instances)
L1i cache:                     192 KiB (6 instances)
L2 cache:                      12 MiB (6 instances)
L3 cache:                      18 MiB (1 instance)
NUMA node(s):                  1
NUMA node0 CPU(s):             0-11
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:            Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Mmio stale data:  Not affected
Vulnerability Retbleed:        Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                                sequence
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 64222 MB
node 0 free: 62929 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```
node distances:
node      0
0:        10
```

```
-----
9. /proc/meminfo
MemTotal:      65764252 kB
```

```
-----
10. who -r
run-level 3 May 14 16:02
```

```
-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                systemd-pstore wickedd wickedd-auto4 wickedd-dhcup4 wickedd-dhcup6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect       wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=178ca5f7-ae8d-49cb-88b7-ce796ad62ec9
splash=silent
quiet
security=apparmor
mitigations=auto
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```

vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                      60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode              0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   893G  30G  863G  4% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem ST50 V3
Product Family: ThinkSystem
Serial:          1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  1x SK Hynix HMCG88AEBEA081N 32 GB 2 rank 4800, configured at 4400
  1x SK Hynix HMCG88AEBEA084N 32 GB 2 rank 4800, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

BIOS Vendor: Lenovo
BIOS Version: CTE105H-1.10
BIOS Date: 03/28/2024
BIOS Revision: 1.10
Firmware Revision: 1.20

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbnk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 78.3

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 78.3

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017

Test Date: May-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECrate®2017_int_base = 78.3

SPECrate®2017_int_peak = 81.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmallo
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-14 16:48:18-0400.

Report generated on 2024-06-24 10:42:13 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-18.