



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

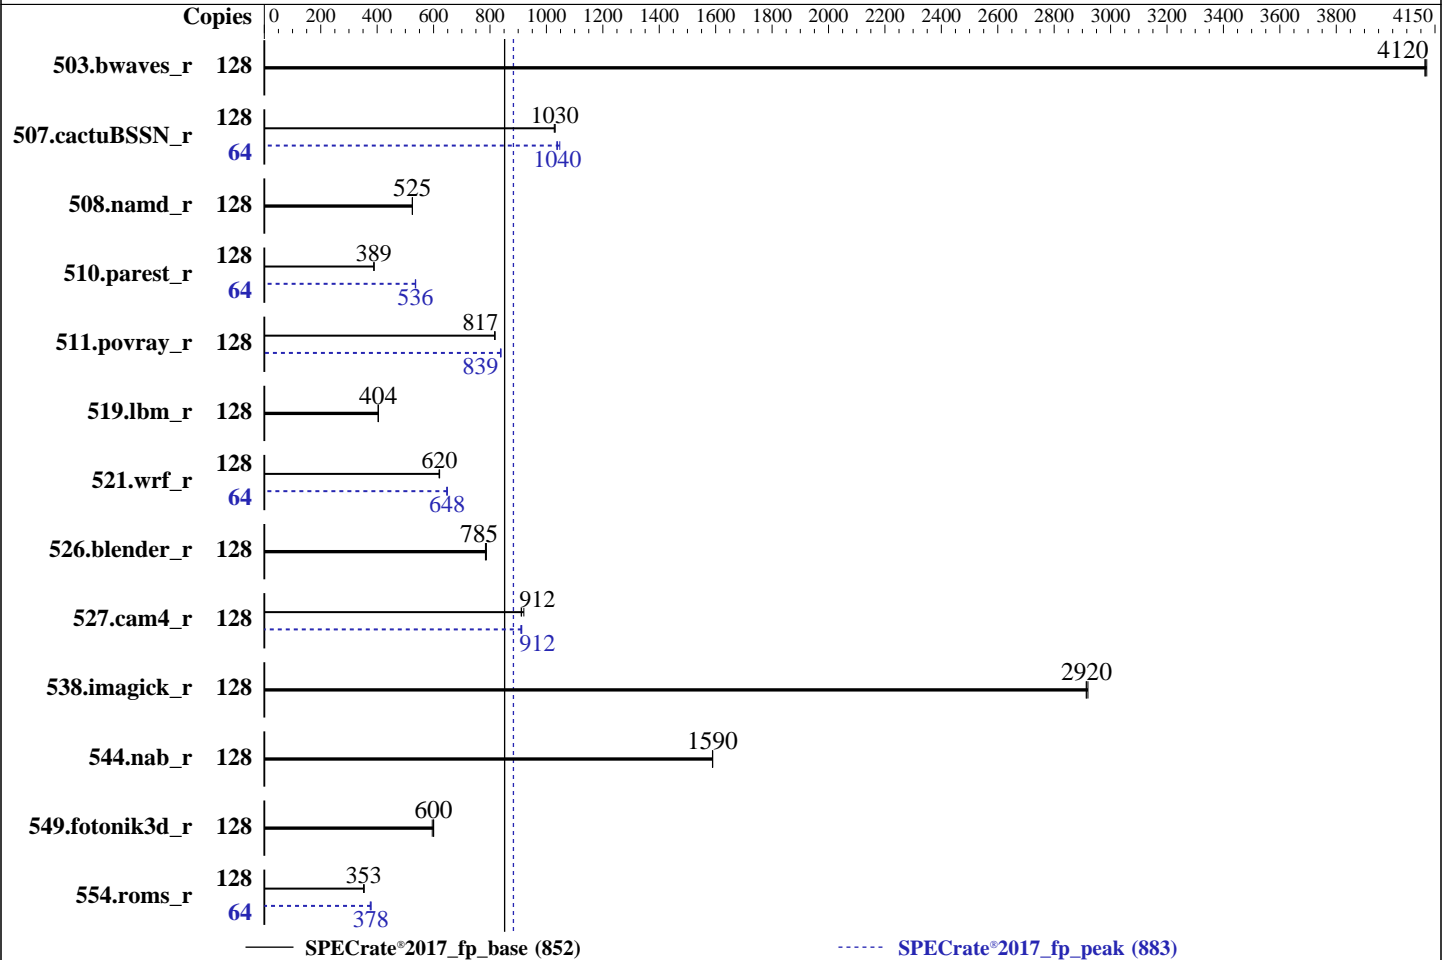

Hardware

CPU Name: Intel Xeon Gold 6548Y+
 Max MHz: 4100
 Nominal: 2500
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.01.03.05 Released Apr-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	311	4120	312	4110	<u>312</u>	<u>4120</u>	128	311	4120	312	4110	<u>312</u>	<u>4120</u>
507.cactuBSSN_r	128	<u>157</u>	<u>1030</u>	157	1030	158	1030	64	78.1	1040	77.4	1050	<u>77.9</u>	<u>1040</u>
508.namd_r	128	232	525	<u>232</u>	<u>525</u>	232	525	128	232	525	<u>232</u>	<u>525</u>	232	525
510.parest_r	128	863	388	861	389	<u>862</u>	<u>389</u>	64	312	536	313	535	<u>312</u>	<u>536</u>
511.povray_r	128	<u>366</u>	<u>817</u>	366	818	366	817	128	357	837	356	839	<u>356</u>	<u>839</u>
519.lbm_r	128	334	404	334	404	<u>334</u>	<u>404</u>	128	334	404	334	404	<u>334</u>	<u>404</u>
521.wrf_r	128	463	620	461	621	<u>462</u>	<u>620</u>	64	221	649	222	647	<u>221</u>	<u>648</u>
526.blender_r	128	248	787	<u>248</u>	<u>785</u>	249	784	128	248	787	<u>248</u>	<u>785</u>	249	784
527.cam4_r	128	243	920	246	911	<u>246</u>	<u>912</u>	128	245	913	<u>246</u>	<u>912</u>	246	909
538.imagick_r	128	<u>109</u>	<u>2920</u>	109	2920	109	2910	128	<u>109</u>	<u>2920</u>	109	2920	109	2910
544.nab_r	128	136	1590	<u>136</u>	<u>1590</u>	136	1590	128	136	1590	<u>136</u>	<u>1590</u>	136	1590
549.fotonik3d_r	128	831	600	838	595	<u>832</u>	<u>600</u>	128	831	600	838	595	<u>832</u>	<u>600</u>
554.roms_r	128	575	354	<u>576</u>	<u>353</u>	578	352	64	269	378	271	375	<u>269</u>	<u>378</u>

SPECrate®2017_fp_base = 852

SPECrate®2017_fp_peak = 883

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-127

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_2024/lib/intel64:/home/cpu2017_2024/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)
LLC Prefetch Set to Disabled
LLC dead line alloc Set to Disabled
Stale AtoS Set to Disabled

Sysinfo program /home/cpu2017_2024/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Jul 15 19:23:57 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
2. w
   19:23:57 up 9:21, 1 user, load average: 69.77, 112.71, 121.51
USER  TTY          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1        10:20   5:10m  1.11s  0.04s sh run_rate.sh
```

```
-----
3. Username
   From environment variable $USER:  root
```

```
-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size                (kbytes, -d) unlimited
   scheduling priority          (-e) 0
   file size                    (blocks, -f) unlimited
   pending signals              (-i) 2060171
   max locked memory            (kbytes, -l) 8192
   max memory size              (kbytes, -m) unlimited
   open files                   (-n) 1024
   pipe size                    (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority           (-r) 0
   stack size                   (kbytes, -s) unlimited
   cpu time                     (seconds, -t) unlimited
   max user processes           (-u) 2060171
   virtual memory               (kbytes, -v) unlimited
   file locks                   (-x) unlimited
```

```
-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 31
   login -- root
   -bash
   sh run_rate.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
   specperl $$SPEC/bin/sysinfo
   $$SPEC = /home/cpu2017_2024
```

```
-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) GOLD 6548Y+
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 32
   siblings       : 64
   2 physical ids (chips)
   128 processors (hardware threads)
   physical id 0: core ids 0-31
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       128
On-line CPU(s) list:         0-127
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   INTEL(R) XEON(R) GOLD 6548Y+
BIOS Model name:             INTEL(R) XEON(R) GOLD 6548Y+
CPU family:                   6
Model:                       207
Thread(s) per core:          2
Core(s) per socket:          32
Socket(s):                    2
Stepping:                    2
Frequency boost:              enabled
CPU max MHz:                  2501.0000
CPU min MHz:                  800.0000
BogoMIPS:                     5000.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                                ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                                avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                                dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                                gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopsntdq la57
                                rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   3 MiB (64 instances)
L1i cache:                   2 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    120 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-15,64-79
NUMA node1 CPU(s):           16-31,80-95
NUMA node2 CPU(s):           32-47,96-111
NUMA node3 CPU(s):           48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128035 MB
node 0 free: 126932 MB
node 1 cpus: 16-31,80-95
node 1 size: 129016 MB
node 1 free: 128101 MB
node 2 cpus: 32-47,96-111
node 2 size: 129016 MB
node 2 free: 128104 MB
node 3 cpus: 48-63,112-127
node 3 size: 129012 MB
node 3 free: 128146 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 527443432 kB

10. who -r

run-level 3 Jul 15 10:02

11. Systemd service manager version: systemd 252 (252-13.e19_2)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmbd-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

 14. Linux kernel boot-time arguments, from /proc/cmdline
 BOOT_IMAGE=(hd0,gpt5)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
 root=UUID=e7cc1b7d-5946-4ed4-8306-b2d382dc5709
 ro
 crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
 resume=UUID=937c2e4e-930c-4489-9a6c-cd05c9a2c08a
 nohz_full=1-127

 15. cpupower frequency-info
 analyzing CPU 0:
 current policy: frequency should be within 800 MHz and 2.50 GHz.
 The governor "performance" may decide which speed to use
 within this range.
 boost state support:
 Supported: yes
 Active: yes

 16. tuned-adm active
 Current active profile: throughput-performance

 17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.2 (Plow)
system-release  Red Hat Enterprise Linux release 9.2 (Plow)

```

```

21. Disk information
SPEC is set to: /home/cpu2017_2024
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   690G 129G 562G 19% /

```

```

22. /sys/devices/virtual/dmi/id
Product:      2288H V7
Product Family: Eagle Stream

```

```

23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
6x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 5200
8x Samsung M321R4GA3PB0-CWMJH 32 GB 2 rank 5600, configured at 5200
2x Samsung M321R4GA3PB0-CWMKH 32 GB 2 rank 5600, configured at 5200

```

```

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      INSYDE Corp.
BIOS Version:     01.01.03.05
BIOS Date:        04/12/2024
BIOS Revision:    3.5

```

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 852

FusionServer 2288H V7 (Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_peak = 883

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-15 07:23:57-0400.
Report generated on 2024-08-14 14:05:42 by CPU2017 PDF formatter v6716.
Originally published on 2024-08-13.