



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

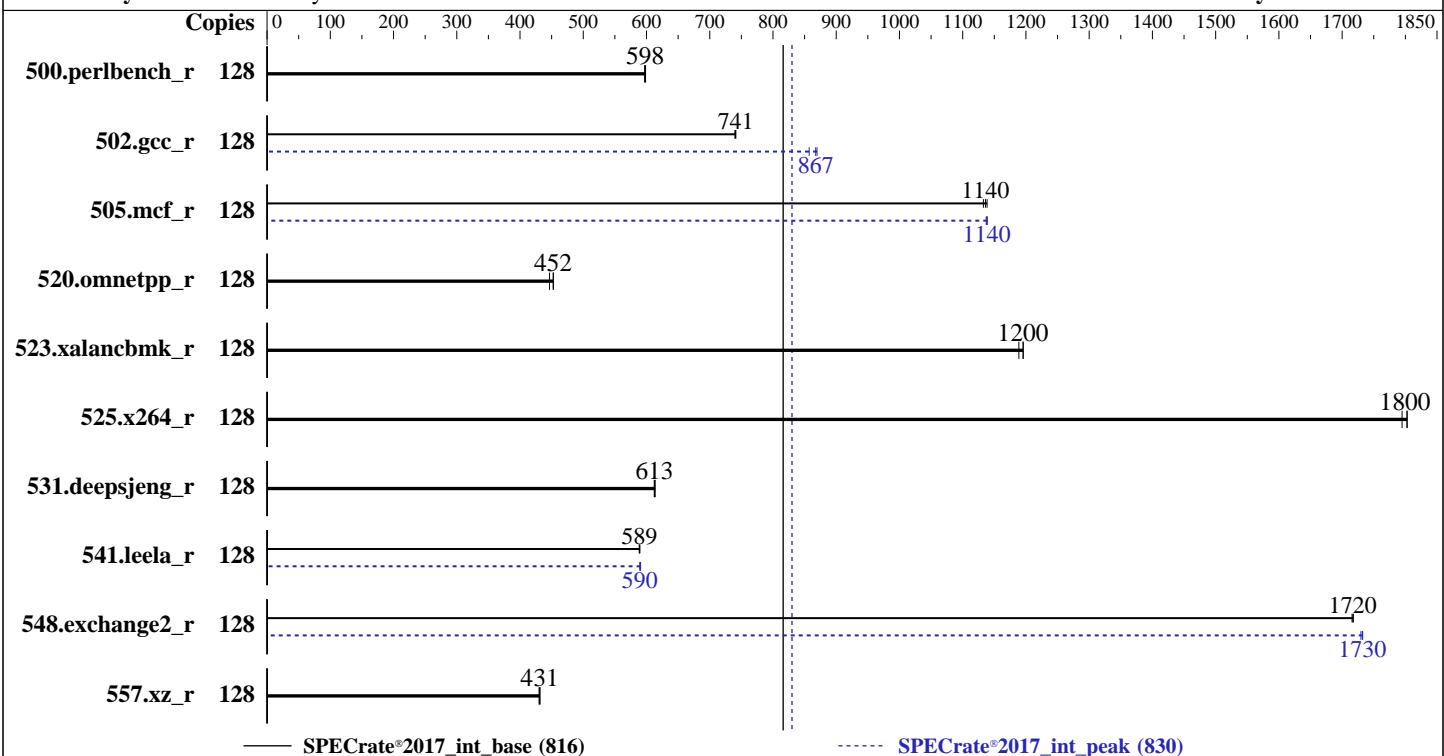

Hardware		Software	
CPU Name:	AMD EPYC 9384X	OS:	SUSE Linux Enterprise Server 15 SP5
Max MHz:	3900		kernel version
Nominal:	3100		5.14.21-150500.53-default
Enabled:	64 cores, 2 chips, 2 threads/core	Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 4.3.4a released May-2024
L2:	1 MB I+D on chip per core	File System:	btrfs
L3:	768 MB I+D on chip per chip, 96 MB shared / 4 cores	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)	Peak Pointers:	32/64-bit
Storage:	1 x 1.6 TB NVME SSD	Other:	None
Other:	CPU Cooling: Air	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	341	598	341	597	340	599	128	341	598	341	597	340	599	341	597
502.gcc_r	128	245	741	245	741	245	740	128	211	857	209	867	208	870	209	867
505.mcf_r	128	182	1140	183	1130	182	1140	128	182	1140	182	1140	182	1140	182	1140
520.omnetpp_r	128	371	452	371	453	376	447	128	371	452	371	453	376	447	371	453
523.xalancbmk_r	128	114	1190	113	1200	113	1200	128	114	1190	113	1200	113	1200	113	1200
525.x264_r	128	124	1800	124	1800	125	1790	128	124	1800	124	1800	125	1790	124	1800
531.deepsjeng_r	128	240	612	239	613	239	614	128	240	612	239	613	239	614	239	613
541.leela_r	128	360	589	360	589	360	590	128	359	591	359	590	360	590	359	590
548.exchange2_r	128	195	1720	195	1720	195	1720	128	194	1730	194	1730	194	1730	194	1730
557.xz_r	128	320	432	321	431	321	430	128	320	432	321	431	321	430	321	430

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
 'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
 To enable THP for all allocations for peak runs,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4
Determinism Slider set to Power
DF C-States set to Disabled
TDP set to 400
PPT set to 400

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Jul 22 05:29:39 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:29:39 up 14 min, 1 user, load average: 0.23, 0.05, 0.02
USER      TTY      FROM             LOGIN@     IDLE    JCPU      PCPU WHAT
root      tty1          -           05:29    19.00s   1.16s   0.12s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 6191220
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes        (-u) 6191220
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_rate_aocc400_znver4_A1.py -b intrate
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9384X 32-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 2
microcode      : 0xa101248
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Platform Notes (Continued)

```
TLB size      : 3584 4K pages
cpu cores    : 32
siblings     : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9384X 32-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               2
Frequency boost:       enabled
CPU max MHz:           3100.0000
CPU min MHz:           1500.0000
BogoMIPS:               6191.24
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmfx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
aperfmperf rapl pnpi pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt
tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
cdp_13 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
overflow_recov succor smca fsrm flush_lld
Virtualization:          AMD-V
L1d cache:               2 MiB (64 instances)
L1i cache:               2 MiB (64 instances)
L2 cache:               64 MiB (64 instances)
L3 cache:               1.5 GiB (16 instances)
NUMA node(s):            8
NUMA node0 CPU(s):       0-7,64-71
NUMA node1 CPU(s):       8-15,72-79
NUMA node2 CPU(s):       16-23,80-87
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

NUMA node3 CPU(s):	24-31,88-95
NUMA node4 CPU(s):	32-39,96-103
NUMA node5 CPU(s):	40-47,104-111
NUMA node6 CPU(s):	48-55,112-119
NUMA node7 CPU(s):	56-63,120-127
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx sync abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 193229 MB
node 0 free: 192835 MB
node 1 cpus: 8-15,72-79
node 1 size: 193497 MB
node 1 free: 193162 MB
node 2 cpus: 16-23,80-87
node 2 size: 193531 MB
node 2 free: 193156 MB
node 3 cpus: 24-31,88-95
node 3 size: 193531 MB
node 3 free: 193121 MB
node 4 cpus: 32-39,96-103
node 4 size: 193531 MB
node 4 free: 192848 MB
node 5 cpus: 40-47,104-111
node 5 size: 193531 MB
node 5 free: 193153 MB
node 6 cpus: 48-55,112-119
node 6 size: 193531 MB
node 6 free: 193033 MB
node 7 cpus: 56-63,120-127
node 7 size: 193449 MB
node 7 free: 192979 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

```
5: 32 32 32 32 32 12 10 12 12  
6: 32 32 32 32 12 12 10 12  
7: 32 32 32 32 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 1584983688 kB
```

10. who -r

```
run-level 3 Jul 22 05:15
```

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status  
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon hwloc-dump-hwdata ipmi ipmievrd issue-add-ssh-keys kexec-load kvm kvm_stat lunmask man-db-create multipathd munge nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd svncrd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 yppbind
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
```

```
root=UUID=e8c160f1-1c7f-452d-a482-9898e4af1927
```

```
splash=silent
```

```
mitigations=auto
```

```
quiet
```

```
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
```

```
current policy: frequency should be within 1.50 GHz and 3.10 GHz.
```

```
The governor "performance" may decide which speed to use  
within this range.
```

```
boost state support:
```

```
Supported: yes
```

```
Active: yes
```

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

```
vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     1
```

```
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5
```

```
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3        btrfs 215G  11G  204G  5% /home
```

```
20. /sys/devices/virtual/dmi/id
  Vendor:      Cisco Systems Inc
  Product:     UCSC-C245-M8SX
  Serial:      WZP2750Z0CS
```

```
21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C245M8.4.3.4a.0.0520240849
BIOS Date: 05/20/2024
BIOS Revision: 5.27

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 502.gcc_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

Fortran | 548.exchange2_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Compiler Version Notes (Continued)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)	SPECrate®2017_int_base = 816
	SPECrate®2017_int_peak = 830

Base Optimization Flags (Continued)

C++ benchmarks:

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsrc-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamlalloc
```

Base Other Flags

C benchmarks:

`-Wno-unused-command-line-argument`

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIB -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdaloc

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIB -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdaloc

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
523.xalancbmk_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Peak Optimization Flags (Continued)

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017_int_base = 816

SPECrate®2017_int_peak = 830

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-22 05:29:38-0400.

Report generated on 2024-08-14 14:06:02 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-13.