



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y, 2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

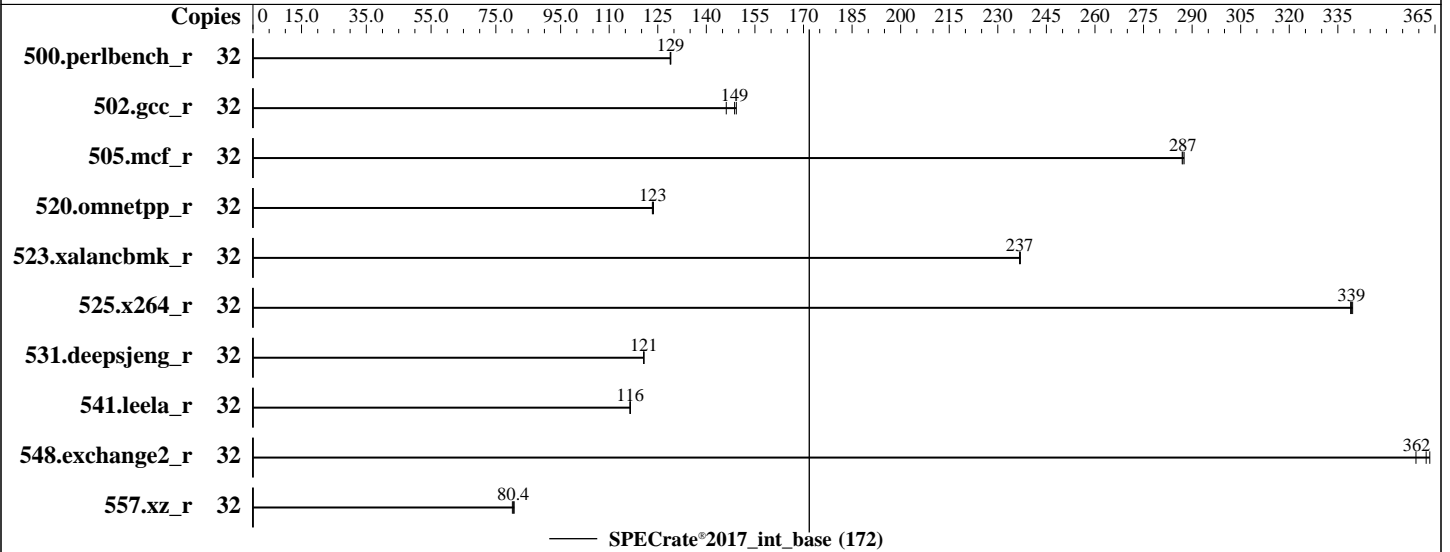

Hardware

CPU Name: Intel Xeon Gold 6526Y
 Max MHz: 3900
 Nominal: 2800
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 37.5 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
 Storage: 1 x SATA M.2, 960GB
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R2.4.0 for D3983-A1x. Released Apr-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y, 2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Aug-2024
Hardware Availability: Apr-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	395	129	395	129	395	129							
502.gcc_r	32	305	149	310	146	304	149							
505.mcf_r	32	180	287	180	288	180	287							
520.omnetpp_r	32	339	124	340	123	340	123							
523.xalancbmk_r	32	143	237	143	237	143	237							
525.x264_r	32	165	339	165	340	165	339							
531.deepsjeng_r	32	304	121	304	121	304	121							
541.leela_r	32	455	116	455	116	455	117							
548.exchange2_r	32	231	362	233	359	231	363							
557.xz_r	32	430	80.4	428	80.7	431	80.1							

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/benchmark/speccpu-23.2/lib/intel64:/home/benchmark/speccpu-23.2/lib/ia32:/home/benchmark/speccpu-23.2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y,
2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled
UPI Link Frequency Select = 14.4GT/s
CPU Performance Boost = Aggressive
SNC (Sub NUMA) = Enable SNC2
Fan Control = Full
HWPM Support = Disabled

Sysinfo program /home/benchmark/speccpu-23.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Aug 7 23:59:16 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
23:59:16 up 13:31, 1 user, load average: 0.21, 10.62, 22.38
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 10:39 13:19m 1.81s 0.53s -bash

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y,
2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Aug-2024
Hardware Availability: Apr-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```

-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 2060759
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size            (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 2060759
   virtual memory         (kbytes, -v) unlimited
   file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
     ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base -o all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
     ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
     rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/benchmark/speccpu-23.2

```

```

-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) GOLD 6526Y
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 16
   siblings       : 32
   1 physical ids (chips)
   32 processors (hardware threads)
   physical id 0: core ids 0-15
   physical id 0: apicids 0-31
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:      x86_64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y,
2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Aug-2024
Hardware Availability: Apr-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```

CPU op-mode(s):          32-bit, 64-bit
Address sizes:           46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                  32
On-line CPU(s) list:    0-31
Vendor ID:               GenuineIntel
Model name:              INTEL(R) XEON(R) GOLD 6526Y
CPU family:              6
Model:                   207
Thread(s) per core:     2
Core(s) per socket:     16
Socket(s):               1
Stepping:                2
Frequency boost:        enabled
CPU max MHz:             2801.0000
CPU min MHz:             800.0000
BogoMIPS:                5600.00
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:         VT-x
L1d cache:              768 KiB (16 instances)
L1i cache:              512 KiB (16 instances)
L2 cache:               32 MiB (16 instances)
L3 cache:               37.5 MiB (1 instance)
NUMA node(s):          2
NUMA node0 CPU(s):     0-7,16-23
NUMA node1 CPU(s):     8-15,24-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability MDS:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y, 2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Aug-2024
Hardware Availability: Apr-2024
Software Availability: Dec-2023

Platform Notes (Continued)

L3 37.5M 37.5M 15 Unified 3 40960 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 257623 MB
node 0 free: 256831 MB
node 1 cpus: 8-15,24-31
node 1 size: 257596 MB
node 1 free: 256886 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10
```

9. /proc/meminfo

```
MemTotal: 527584952 kB
```

10. who -r

```
run-level 3 Aug 7 10:28
```

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
iscsi issue-generator kbdsettings kdump kdump-early klog libvirtd lvm2-monitor nscd
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd iscsi-init iscsid
issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnservice
systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysex
systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd
virtnodevd virtnwfilterd virtproxyd virtqemud virtsecret virtstoraged vncserver@
indirect pcsd virtlockd virtlogd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=9c131c09-0ac8-4880-b3dc-37fa10c43cda
splash=silent
quiet
security=apparmor
crashkernel=401M,high
crashkernel=72M,low
mitigations=auto
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y,
2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 2.80 GHz.

The governor "ondemand" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

19. Disk information

SPEC is set to: /home/benchmark/speccpu-23.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	892G	41G	851G	5%	/home

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y, 2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Aug-2024
Hardware Availability: Apr-2024
Software Availability: Dec-2023

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: FUJITSU
Product: PRIMERGY RX2540 M7
Product Family: SERVER
Serial: EWCEXXXXXX

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x Micron MTC40F2046S1RC56BD1 MMCC 64 GB 2 rank 5600, configured at 5200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R2.4.0 for D3983-A1x
BIOS Date: 03/21/2024
BIOS Revision: 2.4
Firmware Revision: 2.38

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y,
2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Gold 6526Y,
2.80GHz

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-07 10:59:15-0400.

Report generated on 2024-08-29 10:48:12 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-27.