



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

**SPECrate®2017\_fp\_base = 1100**

**SPECrate®2017\_fp\_peak = 1190**

CPU2017 License: 001176


**Test Date:** Sep-2024

**Test Sponsor:** Supermicro

**Hardware Availability:** Oct-2024

**Tested by:** Supermicro

**Software Availability:** Oct-2024

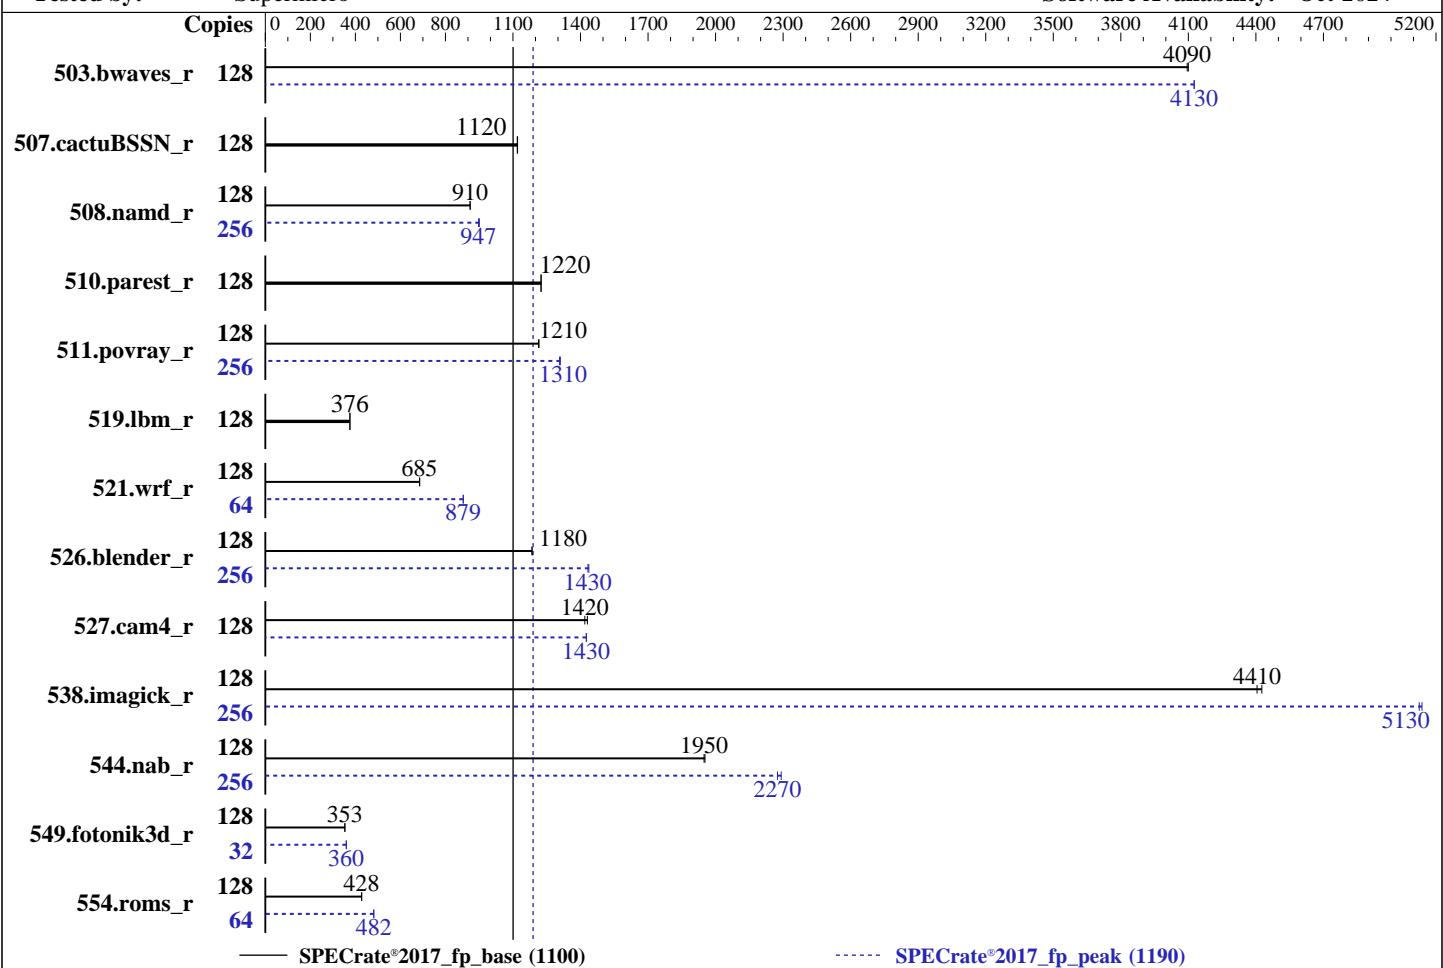

— SPECrate®2017\_fp\_base (1100)

----- SPECrate®2017\_fp\_peak (1190)

## Hardware

CPU Name: AMD EPYC 9755  
Max MHz: 4100  
Nominal: 2700  
Enabled: 128 cores, 1 chip, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores  
Other: None  
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
Storage: 1 x 3.5 TB NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: Ubuntu 24.04.1 LTS  
Compiler: Kernel 6.8.0-45-generic  
Parallel: C/C++/Fortran: Version 5.0.0 of AOCC  
Firmware: No  
File System: Version 1.1 released Sep-2024  
System State: ext4  
Base Pointers: Run level 5 (multi-user)  
Peak Pointers: 64-bit  
Other: 64-bit  
Power Management: None  
BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

**SPECrate®2017\_fp\_base = 1100**

**SPECrate®2017\_fp\_peak = 1190**

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b>313</b>	<b>4090</b>	313	4100			128	<b>311</b>	<b>4130</b>	311	4130		
507.cactusBSSN_r	128	<b>145</b>	<b>1120</b>	145	1120			128	<b>145</b>	<b>1120</b>	145	1120		
508.namd_r	128	<b>134</b>	<b>910</b>	134	910			256	<b>257</b>	<b>947</b>	256	951		
510.parest_r	128	<b>273</b>	<b>1220</b>	273	1230			128	<b>273</b>	<b>1220</b>	273	1230		
511.povray_r	128	<b>246</b>	<b>1210</b>	246	1220			256	<b>457</b>	<b>1310</b>	456	1310		
519.lbm_r	128	359	376	<b>359</b>	<b>376</b>			128	359	376	<b>359</b>	<b>376</b>		
521.wrf_r	128	<b>419</b>	<b>685</b>	418	686			64	163	879	<b>163</b>	<b>879</b>		
526.blender_r	128	<b>165</b>	<b>1180</b>	165	1180			256	271	1440	<b>272</b>	<b>1430</b>		
527.cam4_r	128	<b>158</b>	<b>1420</b>	156	1430			128	157	1430	<b>157</b>	<b>1430</b>		
538.imagick_r	128	<b>72.3</b>	<b>4410</b>	71.9	4430			256	<b>124</b>	<b>5130</b>	124	5140		
544.nab_r	128	<b>111</b>	<b>1950</b>	110	1950			256	188	2290	<b>189</b>	<b>2270</b>		
549.fotonik3d_r	128	<b>1413</b>	<b>353</b>	1410	354			32	<b>347</b>	<b>360</b>	347	360		
554.roms_r	128	475	428	<b>475</b>	<b>428</b>			64	211	482	<b>211</b>	<b>482</b>		

**SPECrate®2017\_fp\_base = 1100**

**SPECrate®2017\_fp\_peak = 1190**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/spec/cpu2017aocc500zen5A1/amd_rate_aocc500_znver5_A_lib/lib:/spec/cpu2017aocc500zen5A1/amd_rate_aocc  
    500_znver5_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

```
NUMA Nodes Per Socket = NPS4  
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 500  
Package Power Limit Control = Manual  
Package Power Limit = 500
```

```
Sysinfo program /spec/cpu2017aocc500zen5A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on smc4708turin-u2404os Sat Sep 21 01:39:02 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- ```
1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

12. Failed units, from systemctl list-units --state=failed  
13. Services, from systemctl list-unit-files  
14. Linux kernel boot-time arguments, from /proc/cmdline  
15. cpupower frequency-info  
16. sysctl  
17. /sys/kernel/mm/transparent\_hugepage  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS

---

1. uname -a  
Linux smc4708turin-u2404os 6.8.0-45-generic #45-Ubuntu SMP PREEMPT\_DYNAMIC Fri Aug 30 12:02:04 UTC 2024  
x86\_64 x86\_64 x86\_64 GNU/Linux

---

2. w  
01:39:02 up 20:13, 1 user, load average: 154.67, 230.84, 244.34  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 21:51 2:55m 0.09s 0.03s -bash

---

3. Username  
From environment variable \$USER: root

---

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 3093788  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

---

5. sysinfo process ancestry  
/sbin/init  
SCREEN -S cpu  
/bin/bash  
python3 ./run\_amd\_rate\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 2 fprate  
runcpu --configfile amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 2 --nopower  
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /spec/cpu2017aocc500zen5A1

---

6. /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

```
model name      : AMD EPYC 9755 128-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 2
stepping        : 1
microcode       : 0xb002116
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 128
siblings        : 256
1 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 0: apicids 0-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 256
On-line CPU(s) list:    0-255
Vendor ID:               AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9755 128-Core Processor
BIOS Model name:        AMD EPYC 9755 128-Core Processor
BIOS CPU family:        107
CPU family:              26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     128
Socket(s):              1
Stepping:                1
Frequency boost:        enabled
CPU(s) scaling MHz:    66%
CPU max MHz:            4121.1909
CPU min MHz:            1500.0000
BogoMIPS:                5392.23
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnopprefetch
osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bml1 avx2
smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local user_shstk avx_vnmi avx512_bf16 clzero iperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

**SPECrate®2017\_fp\_base = 1100**

**SPECrate®2017\_fp\_peak = 1190**

**CPU2017 License:** 001176

**Test Date:** Sep-2024

**Test Sponsor:** Supermicro

**Hardware Availability:** Oct-2024

**Tested by:** Supermicro

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
AMD-V
Virtualization: 6 MiB (128 instances)
L1d cache: 4 MiB (128 instances)
L1i cache: 128 MiB (128 instances)
L2 cache: 512 MiB (16 instances)
L3 cache: 4
NUMA node(s): 0-31,128-159
NUMA node0 CPU(s): 32-63,160-191
NUMA node1 CPU(s): 64-95,192-223
NUMA node2 CPU(s): 96-127,224-255
NUMA node3 CPU(s): Not affected
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d      48K       6M   12 Data          1      64      1           64
  L1i      32K       4M   8 Instruction   1      64      1           64
  L2       1M      128M   16 Unified       2     1024      1           64
  L3      32M      512M   16 Unified       3    32768      1           64

```

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 193089 MB
node 0 free: 190642 MB
node 1 cpus: 32-63,160-191
node 1 size: 193471 MB
node 1 free: 190835 MB
node 2 cpus: 64-95,192-223
node 2 size: 193514 MB
node 2 free: 191381 MB
node 3 cpus: 96-127,224-255
node 3 size: 193443 MB
node 3 free: 191288 MB
node distances:
node  0  1  2  3
  0: 10 12 12 12
  1: 12 10 12 12
  2: 12 12 10 12
  3: 12 12 12 10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 792082532 kB

10. who -r  
run-level 5 Sep 20 05:26

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)  
Default Target Status  
graphical degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd  
Legend: LOAD -> Reflects whether the unit definition was properly loaded.  
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.  
SUB -> The low-level unit activation state, values depend on unit type.  
1 loaded units listed.

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init  
cloud-init-local console-setup cron dmesg e2scrub\_reap finalrd getty@ gpu-manager  
grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd  
networkd-dispatcher nvmefc-boot-connections nvmf-autoconnect open-iscsi open-vm-tools  
pollinate rsyslog secureboot-db setvtrgb snapd ssh sysstat systemd-networkd  
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald  
ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgaauth  
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@  
systemd-boot-check-no-failures systemd-context systemd-network-generator  
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code  
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy  
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext  
generated systemd-time-wait-sync upower  
indirect openipmi  
masked systemd-sysupdate systemd-sysupdate-reboot uuidd  
cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0-45-generic  
root=UUID=7434a739-6d8b-459f-b16c-dd9667f397b8  
ro

15. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 2.70 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2800MHz

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

```
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1
```

```
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs        60000
defrag                      1
max_ptes_none                511
max_ptes_shared              256
max_ptes_swap                64
pages_to_scan                4096
scan_sleep_millisecs         10000
```

```
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
```

```
20. Disk information
SPEC is set to: /spec/cpu2017aocc500zen5A1
Filesystem  Type  Size  Used  Avail Use% Mounted on
/dev/nvme0n1p2  ext4  3.5T  89G  3.2T  3%  /
```

```
21. /sys/devices/virtual/dmi/id
Vendor:      Supermicro
Product:     AS -2126HS-TN
Product Family: SMC H14
Serial:      S920464X4524708
```

```
22. dmidecode
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

### Memory:

12x Samsung M321R8GA0PB1-CCPWC 64 GB 2 rank 6400, configured at 6000

---

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 1.1

BIOS Date: 09/09/2024

BIOS Revision: 5.35

## Compiler Version Notes

---

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

---

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

---

---

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

---

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

---

---

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

---

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

---

---

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

---

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using both C and C++:  
clang++ clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapi -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -ldl

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes

538.imagick_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fvec/lib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fvec/lib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fvec/lib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

```
510.parest_r: basepeak = yes
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fvec/lib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdaloc -ldl -lflang
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fvec/lib=AMDLIBM -ffast-math -flto
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

549.fotonik3d\_r (continued):

```
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

SPECrate®2017\_fp\_base = 1100

SPECrate®2017\_fp\_peak = 1190

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdaloc -ldl
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revB.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Supermicro**

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9755)

**SPECrate®2017\_fp\_base = 1100**

**SPECrate®2017\_fp\_peak = 1190**

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-20 21:39:02-0400.

Report generated on 2024-10-10 09:54:46 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.