



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Oct-2024

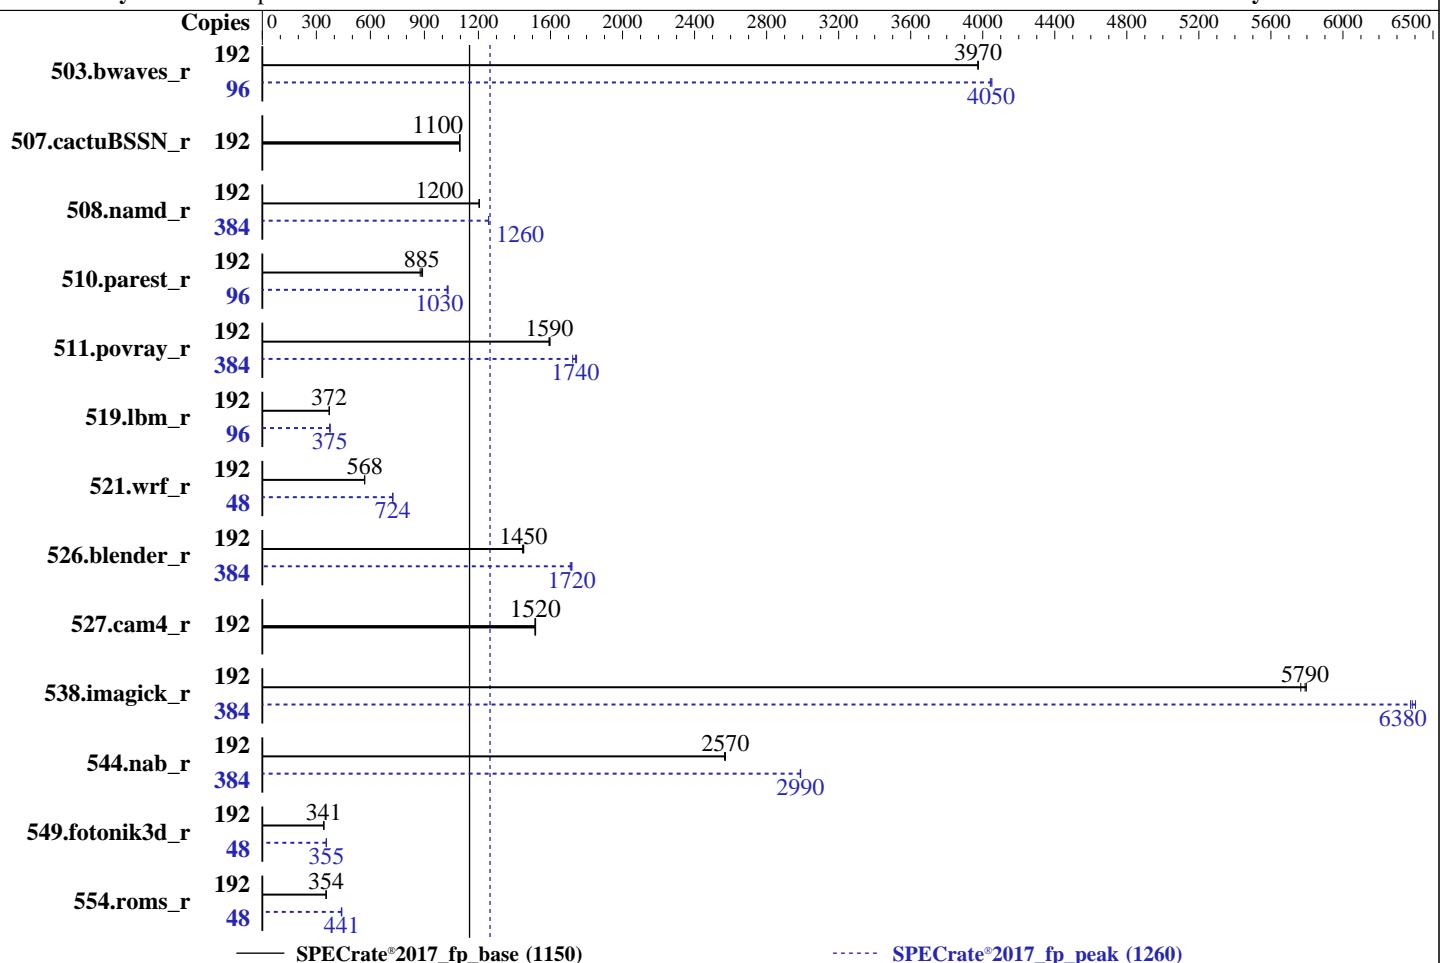

Hardware		Software	
CPU Name:	AMD EPYC 9965	OS:	Ubuntu 24.04 LTS
Max MHz:	3700	Compiler:	Kernel 6.8.0-45-generic
Nominal:	2250	Parallel:	C/C++/Fortran: Version 5.0.0 of AOCC
Enabled:	192 cores, 1 chip, 2 threads/core	Firmware:	No
Orderable:	1,2 chips	File System:	Version 1.1 released Sep-2024
Cache L1:	32 KB I + 48 KB D on chip per core	System State:	ext4
L2:	1 MB I+D on chip per core	Base Pointers:	Run level 5 (multi-user)
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)	Power Management:	None
Storage:	1 x 3.5 TB NVMe SSD		BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	CPU Cooling: Air		



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

**SPECrate®2017\_fp\_base = 1150**

**SPECrate®2017\_fp\_peak = 1260**

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	485	3970	484	3970	<b>484</b>	<b>3970</b>	96	238	4040	<b>238</b>	<b>4050</b>	238	4050
507.cactusBSSN_r	192	222	1100	222	1100	<b>222</b>	<b>1100</b>	192	222	1100	222	1100	<b>222</b>	<b>1100</b>
508.namd_r	192	151	1200	<b>151</b>	<b>1200</b>	152	1200	384	290	1260	<b>290</b>	<b>1260</b>	290	1260
510.parest_r	192	<b>568</b>	<b>885</b>	573	877	564	890	96	245	1030	244	1030	<b>244</b>	<b>1030</b>
511.povray_r	192	<b>281</b>	<b>1590</b>	281	1600	282	1590	384	520	1720	<b>515</b>	<b>1740</b>	514	1740
519.lbm_r	192	544	372	<b>544</b>	<b>372</b>	545	371	96	270	375	<b>270</b>	<b>375</b>	269	376
521.wrf_r	192	757	569	758	567	<b>757</b>	<b>568</b>	48	148	725	<b>148</b>	<b>724</b>	149	723
526.blender_r	192	202	1440	<b>202</b>	<b>1450</b>	201	1450	384	342	1710	340	1720	<b>340</b>	<b>1720</b>
527.cam4_r	192	221	1520	222	1510	<b>222</b>	<b>1520</b>	192	221	1520	222	1510	<b>222</b>	<b>1520</b>
538.imagick_r	192	82.4	5800	<b>82.5</b>	<b>5790</b>	82.8	5770	384	149	6400	<b>150</b>	<b>6380</b>	150	6380
544.nab_r	192	126	2570	126	2570	<b>126</b>	<b>2570</b>	384	216	2990	<b>216</b>	<b>2990</b>	216	2990
549.fotonik3d_r	192	2193	341	<b>2192</b>	<b>341</b>	2191	342	48	526	355	526	355	<b>526</b>	<b>355</b>
554.roms_r	192	861	354	<b>861</b>	<b>354</b>	860	355	48	174	439	<b>173</b>	<b>441</b>	173	441

**SPECrate®2017\_fp\_base = 1150**

**SPECrate®2017\_fp\_peak = 1260**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/spec/cpu2017aocc500znver5_A1/amd_rate_aocc500_znver5_A_lib/lib:/spec/cpu2017aocc500znver5_A1/amd_rate_aocc500_znver5_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
NUMA Nodes Per Socket = NPS4  
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 500  
Package Power Limit Control = Manual  
Package Power Limit = 500

```
Sysinfo program /spec/cpu2017aocc500znver5_A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on smc9709turin-u2404os Sat Sep 21 06:37:37 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

14. cpupower frequency-info

15. sysctl

16. /sys/kernel/mm/transparent\_hugepage

17. /sys/kernel/mm/transparent\_hugepage/khugepaged

18. OS release

19. Disk information

20. /sys/devices/virtual/dmi/id

21. dmidecode

22. BIOS

-----  
1. uname -a  
Linux smc9709turin-u2404os 6.8.0-45-generic #45-Ubuntu SMP PREEMPT\_DYNAMIC Fri Aug 30 12:02:04 UTC 2024  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
06:37:37 up 7:06, 1 user, load average: 188.67, 331.13, 345.72  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 - 23:54 6:39m 0.17s 0.09s screen -S cpu

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 3093293  
nofiles 1024  
vmmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

-----  
5. sysinfo process ancestry  
/sbin/init  
/bin/login -p --  
-bash  
screen -S cpu  
SCREEN -S cpu  
/bin/bash  
python3 ./run\_amd\_rate\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 fprate  
runcpu --configfile amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /spec/cpu2017aocc500znver5\_A1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

**SPECrate®2017\_fp\_base = 1150**

**SPECrate®2017\_fp\_peak = 1260**

**CPU2017 License:** 001176

**Test Date:** Sep-2024

**Test Sponsor:** Supermicro

**Hardware Availability:** Oct-2024

**Tested by:** Supermicro

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 9965 192-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 17
stepping        : 0
microcode       : 0xb101021
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 192
siblings        : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	384
On-line CPU(s) list:	0-383
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9965 192-Core Processor
BIOS Model name:	AMD EPYC 9965 192-Core Processor
BIOS CPU family:	Unknown CPU @ 2.2GHz
CPU family:	107
Model:	26
Thread(s) per core:	17
Core(s) per socket:	2
Socket(s):	192
Stepping:	1
Frequency boost:	0
CPU(s) scaling MHz:	enabled
CPU max MHz:	61%
CPU min MHz:	3700.1951
BogoMIPS:	1500.0000
Flags:	4493.12
	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
	pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
	rdrnd lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
	extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
	sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
	cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
	osw ibr skinit wdt tce topoext perfctr_core perfctr_nb bpext
	perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
	ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
	smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
	avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
	xsave vec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
	cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
	xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
	nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
	pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

**SPECrate®2017\_fp\_base = 1150**

**SPECrate®2017\_fp\_peak = 1260**

**CPU2017 License:** 001176

**Test Date:** Sep-2024

**Test Sponsor:** Supermicro

**Hardware Availability:** Oct-2024

**Tested by:** Supermicro

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_llld debug_swap
AMD-V
9 MiB (192 instances)
6 MiB (192 instances)
192 MiB (192 instances)
384 MiB (12 instances)
4
0-47,192-239
48-95,240-287
96-143,288-335
144-191,336-383
Not affected
Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Not affected
Not affected
Mitigation; Spec store bypass:
Vulnerability Itlb multihit:
Vulnerability Llft:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Mmio stale data:
Vulnerability Reg file data sampling:
Vulnerability Retbleed:
Vulnerability Spec rstack overflow:
Vulnerability Srbds:
Vulnerability Tsx async abort:

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-47,192-239

node 0 size: 193008 MB

node 0 free: 190259 MB

node 1 cpus: 48-95,240-287

node 1 size: 193503 MB

node 1 free: 190462 MB

node 2 cpus: 96-143,288-335

node 2 size: 193460 MB

node 2 free: 190726 MB

node 3 cpus: 144-191,336-383

node 3 size: 193421 MB

node 3 free: 190725 MB

node distances:

node	0	1	2	3
------	---	---	---	---

0:	10	12	12	12
----	----	----	----	----

1:	12	10	12	12
----	----	----	----	----

2:	12	12	10	12
----	----	----	----	----

3:	12	12	12	10
----	----	----	----	----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 791955640 kB

10. who -r  
run-level 5 Sep 20 23:31

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)  
Default Target Status  
graphical running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init  
cloud-init-local console-setup cron dmesg e2scrub\_reap finalrd getty@ gpu-manager  
grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd  
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb  
snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore  
systemd-resolved systemd-timesyncd thermal ua-reboot-cmds ubuntu-advantage udisks2 ufw  
unattended-upgrades vgaauth  
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh  
systemd-boot-check-no-failures systemd-confext systemd-network-generator  
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code  
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy  
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext  
systemd-time-wait-sync upower  
generated openipmi  
indirect systemd-sysupdate systemd-sysupdate-reboot uidd  
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0-45-generic  
root=UUID=b5be3f8f-1d1a-48e6-804b-c82fd1e321cb  
ro

14. cpupower frequency-info  
analyzing CPU 350:  
current policy: frequency should be within 1.50 GHz and 2.25 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 38800MHz

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

```
vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     1
```

```
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04 LTS
```

```
19. Disk information
SPEC is set to: /spec/cpu2017aocc500znver5_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme2n1p2  ext4  3.5T  18G  3.3T  1%  /
```

```
20. /sys/devices/virtual/dmi/id
  Vendor:        Supermicro
  Product:       AS -2126HS-TN
  Product Family: SMC H14
  Serial:        S920464X4819709
```

```
21. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x SK Hynix HMCG94AHBRA277N 64 GB 2 rank 6400, configured at 6000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Platform Notes (Continued)

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.1  
BIOS Date: 09/09/2024  
BIOS Revision: 5.35

## Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Base Portability Flags (Continued)

511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdaloc -ldl -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2126HS-TN  
(H14DSH , AMD EPYC 9965)

SPECrate®2017\_fp\_base = 1150

SPECrate®2017\_fp\_peak = 1260

CPU2017 License: 001176

Test Date: Sep-2024

Test Sponsor: Supermicro

Hardware Availability: Oct-2024

Tested by: Supermicro

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

526.blender\_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdaloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-21 02:37:37-0400.

Report generated on 2024-10-10 09:55:46 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.