



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573


Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

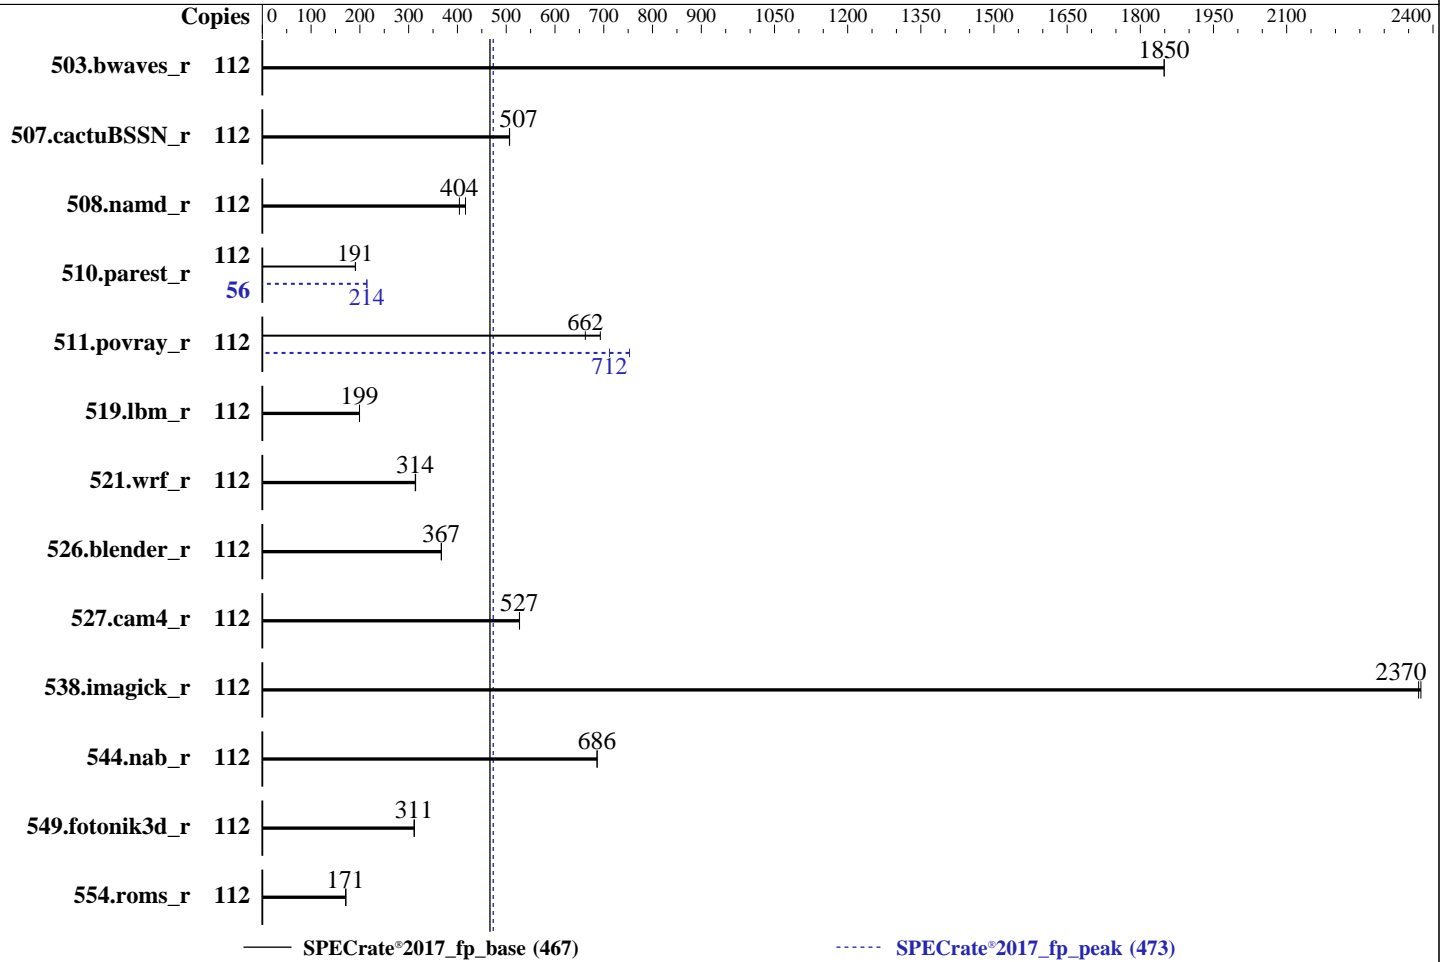

Hardware

CPU Name: Intel Xeon 6746E
 Max MHz: 2700
 Nominal: 2000
 Enabled: 112 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 96 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R, running at 5600)
 Storage: 80 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.1.1 released Oct-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	607	1850	<u>607</u>	<u>1850</u>			112	607	1850	<u>607</u>	<u>1850</u>		
507.cactuBSSN_r	112	<u>280</u>	<u>507</u>	280	507			112	<u>280</u>	<u>507</u>	280	507		
508.namd_r	112	255	417	<u>263</u>	<u>404</u>			112	255	417	<u>263</u>	<u>404</u>		
510.parest_r	112	1533	191	<u>1537</u>	<u>191</u>			56	683	214	<u>684</u>	<u>214</u>		
511.povray_r	112	377	693	<u>395</u>	<u>662</u>			112	<u>367</u>	<u>712</u>	347	753		
519.lbm_r	112	592	199	<u>592</u>	<u>199</u>			112	592	199	<u>592</u>	<u>199</u>		
521.wrf_r	112	798	314	<u>800</u>	<u>314</u>			112	798	314	<u>800</u>	<u>314</u>		
526.blender_r	112	464	367	<u>465</u>	<u>367</u>			112	464	367	<u>465</u>	<u>367</u>		
527.cam4_r	112	371	527	<u>372</u>	<u>527</u>			112	371	527	<u>372</u>	<u>527</u>		
538.imagick_r	112	117	2380	<u>118</u>	<u>2370</u>			112	117	2380	<u>118</u>	<u>2370</u>		
544.nab_r	112	<u>275</u>	<u>686</u>	275	687			112	<u>275</u>	<u>686</u>	275	687		
549.fotonik3d_r	112	<u>1404</u>	<u>311</u>	1400	312			112	<u>1404</u>	<u>311</u>	1400	312		
554.roms_r	112	<u>1043</u>	<u>171</u>	1037	172			112	<u>1043</u>	<u>171</u>	1037	172		

SPECrate®2017_fp_base = 467

SPECrate®2017_fp_peak = 473

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

LLC Prefetch : Disabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
Energy Efficient Turbo : Disabled
CIE : Disabled
C-States : Autonomous
Energy Efficient Policy : Performance
CPU Interconnect Bus -
Link Power Management : Disabled
PCI ASPM L1 Link Power Management : Disabled
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on AFN4705-R470 Sat Oct 26 04:53:00 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Jun-2024

Platform Notes (Continued)

22. BIOS

```
1. uname -a
Linux AFN4705-R470 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
04:53:00 up 4:12, 1 user, load average: 66.81, 100.78, 107.65
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1    -             00:41    4:10m 1.65s  0.01s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.0.2 --output_format html,pdf,txt
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1029381
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1029381
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.0.2 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.0.2 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=56 --define
physicalfirst --define no-numa --reportable --tune base,peak -o all --define drop_caches --iterations 2
--define DL-VERS=6.0.2 --output_format html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=56 --define
physicalfirst --define no-numa --reportable --tune base,peak --output_format all --define drop_caches
--iterations 2 --define DL-VERS=6.0.2 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

```

6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6746E
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 175
   stepping        : 3
   microcode       : 0x30002c0
   bugs            : spectre_v1 spectre_v2 spec_store_bypass swaps bhi
   cpu cores       : 112
   siblings        : 112
   1 physical ids (chips)
   112 processors (hardware threads)
   physical id 0: core ids 0-111
   physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
   32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
   4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
Model name:             Intel(R) Xeon(R) 6746E
BIOS Model name:       Intel(R) Xeon(R) 6746E  CPU @ 2.0GHz
BIOS CPU family:        179
CPU family:             6
Model:                  175
Thread(s) per core:    1
Core(s) per socket:    112
Socket(s):              1
Stepping:               3
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bml avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```
pln pts vnmi umip pku ospke waitpkg gfni vaes vpcmlulqdg tme rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize pconfig arch_lbr ibt flush_lld arch_capabilities
VT-x
```

```
Virtualization:
L1d cache: 3.5 MiB (112 instances)
L1i cache: 7 MiB (112 instances)
L2 cache: 112 MiB (28 instances)
L3 cache: 96 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-111
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 32K 3.5M 8 Data 1 64 1 64
L1i 64K 7M 8 Instruction 1 128 1 64
L2 4M 112M 16 Unified 2 4096 1 64
L3 96M 96M 12 Unified 3 131072 1 64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-111
node 0 size: 257371 MB
node 0 free: 244978 MB
node distances:
node 0
0: 10
```

```
9. /proc/meminfo
MemTotal: 263548524 kB
```

```
10. who -r
run-level 3 Oct 26 00:41
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```

enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewallld getty@
                 irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
                 nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd
                 wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime  systemd-remount-fs
disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                 chrynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
                 gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
                 multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
                 snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
                 systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@

indirect        systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=c5450b9b-1d88-455f-bda3-3d157643f526
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 97:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Jun-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 5.0G 76G 7% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R470
Product Family: PowerEdge
Serial: AFN4705

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x 002C069D002C MTC20F2085S1RC64BD1 USFF 32 GB 2 rank 6400, configured at 5600

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.1
BIOS Date: 10/17/2024
BIOS Revision: 1.1

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Jun-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -gopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto -Ofast -ffast-math -mfpmath=sse -funroll-loops -gopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 467

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_fp_peak = 473

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-26 04:52:59-0400.

Report generated on 2024-12-11 13:47:07 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-11.