



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

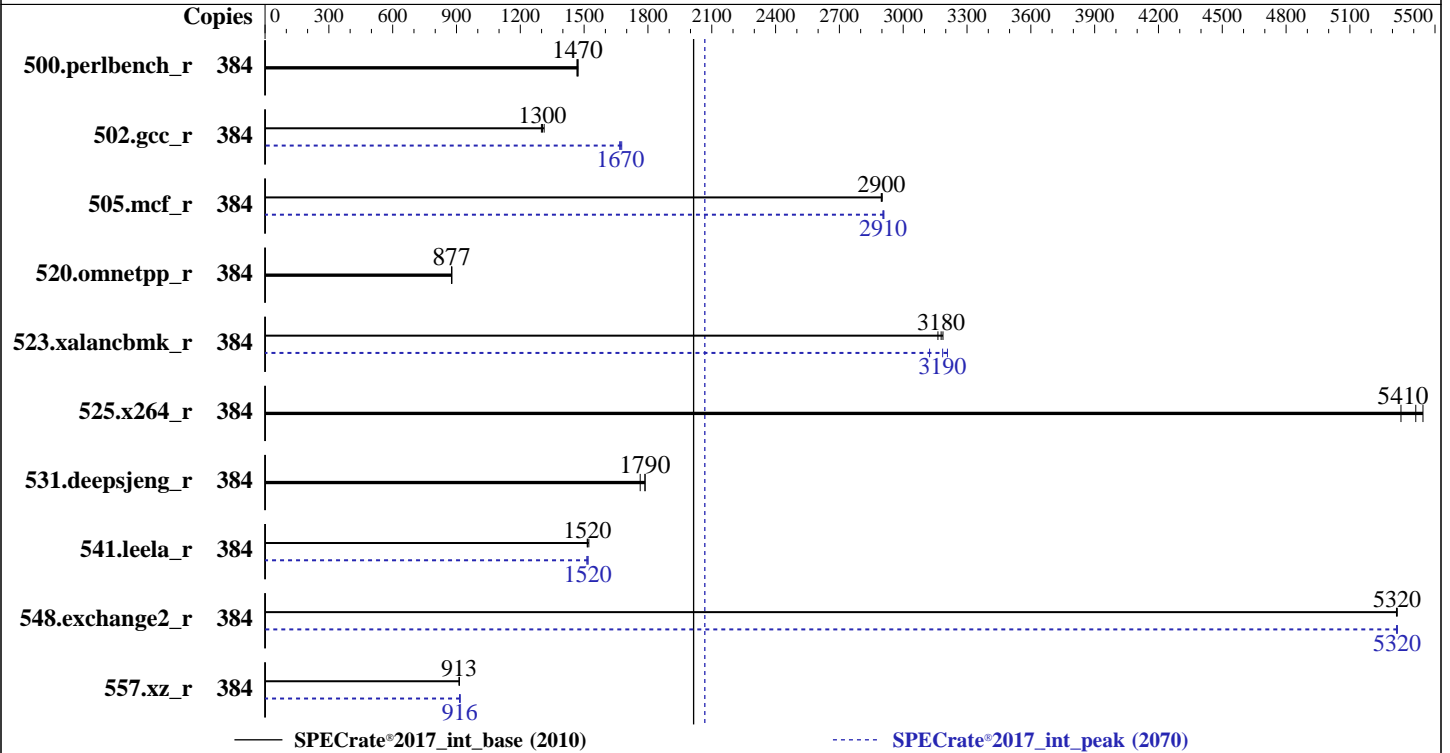

### Hardware

CPU Name: AMD EPYC 9645  
 Max MHz: 3700  
 Nominal: 2300  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 12 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,  
 running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version v2.20 10/31/2024 released  
 Oct-2024  
 File System: btrfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2024  
Hardware Availability: Jan-2025  
Software Availability: Sep-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	415	1470	<b>416</b>	<b>1470</b>	417	1470	384	415	1470	<b>416</b>	<b>1470</b>	417	1470
502.gcc_r	384	414	1310	<b>417</b>	<b>1300</b>	419	1300	384	<b>325</b>	<b>1670</b>	326	1670	324	1680
505.mcf_r	384	214	2900	<b>214</b>	<b>2900</b>	214	2900	384	214	2900	<b>214</b>	<b>2910</b>	213	2910
520.omnetpp_r	384	574	878	575	876	<b>574</b>	<b>877</b>	384	574	878	575	876	<b>574</b>	<b>877</b>
523.xalancbmk_r	384	127	3190	128	3160	<b>128</b>	<b>3180</b>	384	130	3120	126	3210	<b>127</b>	<b>3190</b>
525.x264_r	384	126	5340	<b>124</b>	<b>5410</b>	124	5440	384	126	5340	<b>124</b>	<b>5410</b>	124	5440
531.deepsjeng_r	384	<b>246</b>	<b>1790</b>	246	1790	250	1760	384	<b>246</b>	<b>1790</b>	246	1790	250	1760
541.leela_r	384	420	1510	<b>419</b>	<b>1520</b>	418	1520	384	<b>419</b>	<b>1520</b>	420	1510	419	1520
548.exchange2_r	384	189	5320	<b>189</b>	<b>5320</b>	189	5320	384	189	5320	189	5320	<b>189</b>	<b>5320</b>
557.xz_r	384	454	913	454	913	<b>454</b>	<b>913</b>	384	452	917	453	915	<b>453</b>	<b>916</b>

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.30 GHz, AMD EPYC 9645)

**SPECrate®2017\_int\_base = 2010**

**SPECrate®2017\_int\_peak = 2070**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/home/cpu2017/amd\_rate\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017/amd\_rate\_aocc500\_znver5\_A\_lib/lib32:"  
MALLOCONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

MALLOCONF = "thp:always"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

NUMA memory domains per socket set to Four memory domains per socket

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Nov 21 16:53:43 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.30 GHz, AMD EPYC 9645)

**SPECrate®2017\_int\_base = 2010**

**SPECrate®2017\_int\_peak = 2070**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
16:53:43 up 1 min, 3 users, load average: 12.95, 9.36, 3.75
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      pts/0    10.30.195.96  16:52       22.00s     1.05s      0.11s    /bin/bash ./amd_rate_aocc500_znver5_A1.sh

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093758
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093758
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templots/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.30 GHz, AMD EPYC 9645)

**SPECrate®2017\_int\_base = 2010**

**SPECrate®2017\_int\_peak = 2070**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Platform Notes (Continued)

6. /proc/cpuinfo

```

model name      : AMD EPYC 9645 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping      : 0
microcode     : 0xb101025
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 0: apicids 0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247
physical id 1: apicids 256-279,288-311,320-343,352-375,384-407,416-439,448-471,480-503

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9645 96-Core Processor
BIOS Model name:       AMD EPYC 9645 96-Core Processor           CPU @ 2.3GHz
BIOS CPU family:       107
CPU family:            26
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):             2
Stepping:              0
Frequency boost:       enabled
CPU(s) scaling MHz:    100%
CPU max MHz:           2300.0000
CPU min MHz:           1500.0000
BogoMIPS:              4592.89
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                       rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                       extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                       sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                       cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                       perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                       ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                       smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                       avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                       xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf  
xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnni  
avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_llid debug\_swap

### Virtualization:

L1d cache: AMD-V  
L1i cache: 9 MiB (192 instances)  
L2 cache: 6 MiB (192 instances)  
L3 cache: 192 MiB (192 instances)  
L3 cache: 512 MiB (16 instances)

NUMA node(s): 8  
NUMA node0 CPU(s): 0-23,192-215  
NUMA node1 CPU(s): 24-47,216-239  
NUMA node2 CPU(s): 48-71,240-263  
NUMA node3 CPU(s): 72-95,264-287  
NUMA node4 CPU(s): 96-119,288-311  
NUMA node5 CPU(s): 120-143,312-335  
NUMA node6 CPU(s): 144-167,336-359  
NUMA node7 CPU(s): 168-191,360-383

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; userscopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBSB-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

### From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0-23,192-215  
node 0 size: 96376 MB  
node 0 free: 95860 MB  
node 1 cpus: 24-47,216-239  
node 1 size: 96755 MB  
node 1 free: 96259 MB  
node 2 cpus: 48-71,240-263  
node 2 size: 96755 MB  
node 2 free: 96337 MB  
node 3 cpus: 72-95,264-287  
node 3 size: 96755 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.30 GHz, AMD EPYC 9645)

**SPECrate®2017\_int\_base = 2010**

**SPECrate®2017\_int\_peak = 2070**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

node 3 free: 96271 MB
node 4 cpus: 96-119,288-311
node 4 size: 96755 MB
node 4 free: 96566 MB
node 5 cpus: 120-143,312-335
node 5 size: 96716 MB
node 5 free: 96532 MB
node 6 cpus: 144-167,336-359
node 6 size: 96755 MB
node 6 free: 96569 MB
node 7 cpus: 168-191,360-383
node 7 size: 96599 MB
node 7 free: 96189 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:          792033136 kB

```

```

-----
10. who -r
    run-level 5 Nov 21 16:52

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=c70d6b0a-e893-482b-b564-48624143e39e

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
```

-----  
14. cpupower frequency-info

analyzing CPU 235:

current policy: frequency should be within 1.50 GHz and 2.30 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

-----  
15. tuned-adm active

No current active profile.

-----  
16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

-----  
17. /sys/kernel/mm/transparent\_hugepage

```
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

-----  
19. OS release

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.30 GHz, AMD EPYC 9645)

**SPECrate®2017\_int\_base = 2010**

**SPECrate®2017\_int\_peak = 2070**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Platform Notes (Continued)

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

### 20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	407G	23G	383G	6%	/home

### 21. /sys/devices/virtual/dmi/id

Vendor: HPE  
 Product: ProLiant DL385 Gen11  
 Product Family: ProLiant  
 Serial: DL385G11-006

### 22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMC88AHBRA471N 32 GB 2 rank 6400, configured at 6000

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
 BIOS Version: 2.20  
 BIOS Date: 10/31/2024  
 BIOS Revision: 2.20  
 Firmware Revision: 1.63

## Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
 | 557.xz\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Base Portability Flags (Continued)

```

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=50
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264\_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

531.deepsjeng\_r: basepeak = yes

541.leela\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl
```

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd\_rate\_aocc500\_znver5\_A\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.30 GHz, AMD EPYC 9645)

SPECrate®2017\_int\_base = 2010

SPECrate®2017\_int\_peak = 2070

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Sep-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-21 06:23:42-0500.

Report generated on 2024-12-18 18:21:34 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.