



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

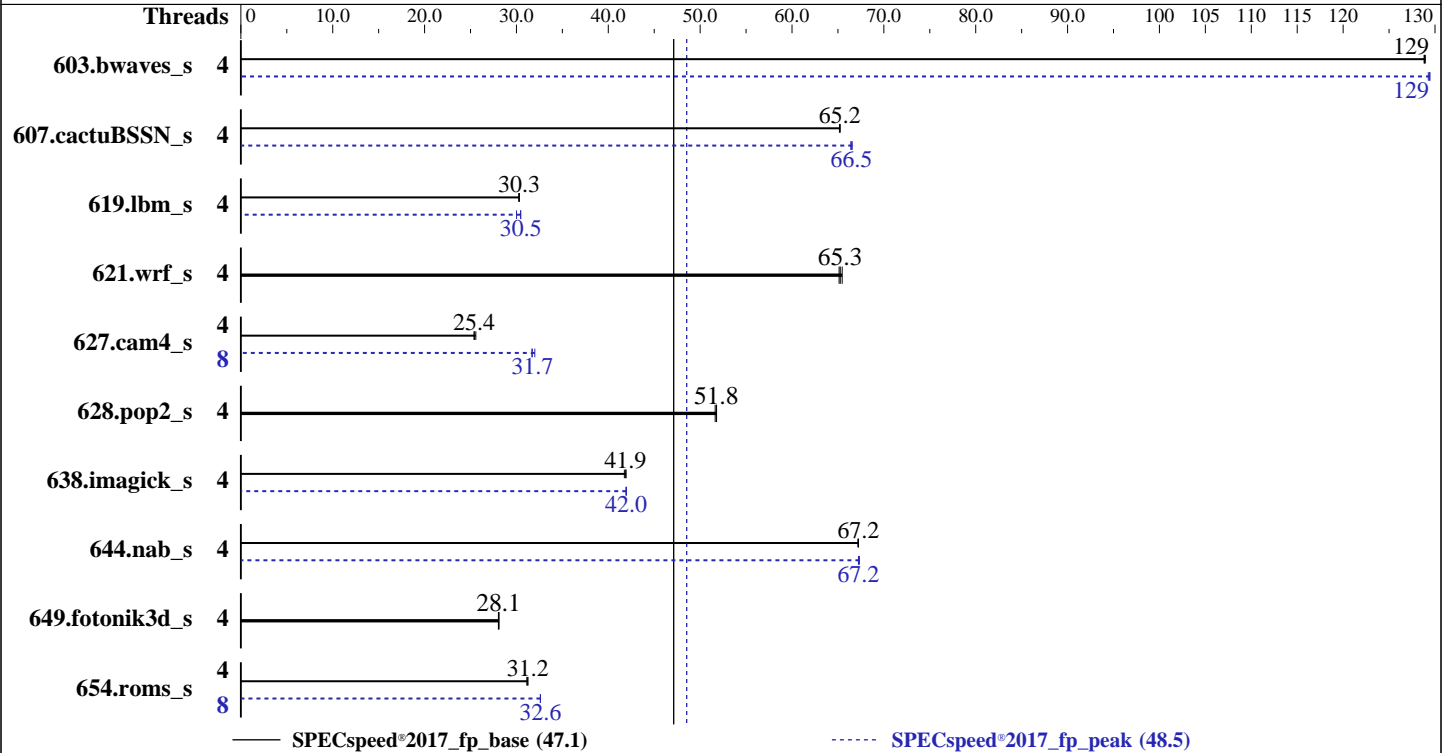

### Hardware

CPU Name: AMD EPYC 4124P  
 Max MHz: 5100  
 Nominal: 3800  
 Enabled: 4 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 5200)  
 Storage: 1 x 960 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version QIE101W 1.10 released Nov-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: OS set to balance power and performance



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECSpeed®2017\_fp\_base = 47.1

SPECSpeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Oct-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	4	<b>458</b>	<b>129</b>	458	129	458	129	4	456	129	456	129	<b>456</b>	<b>129</b>
607.cactuBSSN_s	4	256	65.2	256	65.2	<b>256</b>	<b>65.2</b>	4	<b>251</b>	<b>66.5</b>	251	66.4	250	66.6
619.lbm_s	4	173	30.3	173	30.3	<b>173</b>	<b>30.3</b>	4	175	30.0	172	30.5	<b>172</b>	<b>30.5</b>
621.wrf_s	4	202	65.5	<b>203</b>	<b>65.3</b>	203	65.1	4	202	65.5	<b>203</b>	<b>65.3</b>	203	65.1
627.cam4_s	4	<b>349</b>	<b>25.4</b>	347	25.6	349	25.4	8	277	32.0	<b>279</b>	<b>31.7</b>	280	31.7
628.pop2_s	4	<b>229</b>	<b>51.8</b>	229	51.8	230	51.6	4	<b>229</b>	<b>51.8</b>	229	51.8	230	51.6
638.imagick_s	4	346	41.7	344	41.9	<b>344</b>	<b>41.9</b>	4	344	41.9	344	42.0	<b>344</b>	<b>42.0</b>
644.nab_s	4	260	67.2	260	67.2	<b>260</b>	<b>67.2</b>	4	259	67.3	260	67.2	<b>260</b>	<b>67.2</b>
649.fotonik3d_s	4	325	28.0	324	28.1	<b>325</b>	<b>28.1</b>	4	325	28.0	324	28.1	<b>325</b>	<b>28.1</b>
654.roms_s	4	506	31.1	<b>504</b>	<b>31.2</b>	504	31.2	8	483	32.6	<b>483</b>	<b>32.6</b>	483	32.6

SPECSpeed®2017\_fp\_base = **47.1**

SPECSpeed®2017\_fp\_peak = **48.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Dec-2024

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-7"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "8"

Environment variables set by runcpu during the 603.bwaves\_s peak run:

GOMP\_CPU\_AFFINITY = "0-3"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:

GOMP\_CPU\_AFFINITY = "0-3"

Environment variables set by runcpu during the 619.lbm\_s peak run:

GOMP\_CPU\_AFFINITY = "0-3"

Environment variables set by runcpu during the 627.cam4\_s peak run:

GOMP\_CPU\_AFFINITY = "0-7"

Environment variables set by runcpu during the 638.imagick\_s peak run:

GOMP\_CPU\_AFFINITY = "0-3"

Environment variables set by runcpu during the 644.nab\_s peak run:

GOMP\_CPU\_AFFINITY = "0-3"

Environment variables set by runcpu during the 654.roms\_s peak run:

GOMP\_CPU\_AFFINITY = "0-7"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Dec 10 03:27:51 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Dec-2024

**Software Availability:** Oct-2024

### Platform Notes (Continued)

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
03:27:51 up 9:23, 2 users, load average: 1.56, 3.70, 2.90
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root     pts/0    172.30.81.2   18:04      9:22m    0.78s   0.03s  /bin/bash ./amd_speed_aocc500_znver5_A1.sh
root     pts/1    172.30.81.2   18:08      9:16m    0.04s   0.04s  -bash
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 253446
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 253446
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Dec-2024

**Software Availability:** Oct-2024

### Platform Notes (Continued)

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/bash ./03.local_run_SPECCpu.sh
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.008/templogs/preenv.fpspeed.008.0.log --lognum 008.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 4124P 4-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 97
stepping        : 2
microcode       : 0xa601209
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size        : 3584 4K pages
cpu cores       : 4
siblings        : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-3
physical id 0: apicids 0-7

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                8
On-line CPU(s) list:  0-7
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 4124P 4-Core Processor
BIOS Model name:      AMD EPYC 4124P 4-Core Processor
BIOS CPU family:      107
CPU family:           25
Model:                97
Thread(s) per core:   2
Core(s) per socket:   4
Socket(s):            1
Stepping:             2
Frequency boost:       enabled
CPU(s) scaling MHz:   65%
CPU max MHz:          5169.3350

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

CPU min MHz:          3000.0000
BogoMIPS:             7585.35
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16
                    sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                    invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc
                    arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                    decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif
                    x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni
                    vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid
                    overflow_recov succor smca flush_l1d
AMD-V
L1d cache:           128 KiB (4 instances)
L1i cache:           128 KiB (4 instances)
L2 cache:            4 MiB (4 instances)
L3 cache:            16 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):  0-7
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow:  Mitigation; Safe RET
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   32K   128K    8 Data          1    64     1           64
L1i   32K   128K    8 Instruction   1    64     1           64
L2    1M    4M      8 Unified       2  2048     1           64
L3    16M   16M    16 Unified      3 16384     1           64

```

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-7
node 0 size: 63411 MB
node 0 free: 62873 MB
node distances:
node 0
0: 10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 64933876 kB

10. who -r  
run-level 3 Dec 9 18:04

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd  
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofsd autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd  
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=69af5974-2680-4d0c-9805-7dae997bdc7d  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 6:  
current policy: frequency should be within 3.00 GHz and 3.80 GHz.  
The governor "ondemand" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio      1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness               1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode       1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   893G  43G  851G  5% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      LENOVO
Product:     ThinkSystem ST45 V3
Product Family: ThinkSystem
Serial:      INVALID

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x SK Hynix HMC88AGB084N 32 GB 2 rank 5600, configured at 5200

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      LENOVO

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

BIOS Version: QIE101W-1.10  
BIOS Date: 11/11/2024  
BIOS Revision: 1.10  
Firmware Revision: 12.65  
ST45 V3 CPU performance result based on 65W maximum consumption limit.

### Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 47.1

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017

**Test Date:** Dec-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Dec-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2024

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Dec-2024

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt  
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100  
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Oct-2024

## Peak Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick\_s: Same as 619.lbm\_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 47.1

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_peak = 48.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST45 V3  
(3.80 GHz, AMD EPYC 4124P)

SPECspeed®2017\_fp\_base = 47.1

SPECspeed®2017\_fp\_peak = 48.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2024

**Hardware Availability:** Dec-2024

**Software Availability:** Oct-2024

## Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-09 14:27:51-0500.

Report generated on 2025-01-15 12:32:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.