



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro


GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

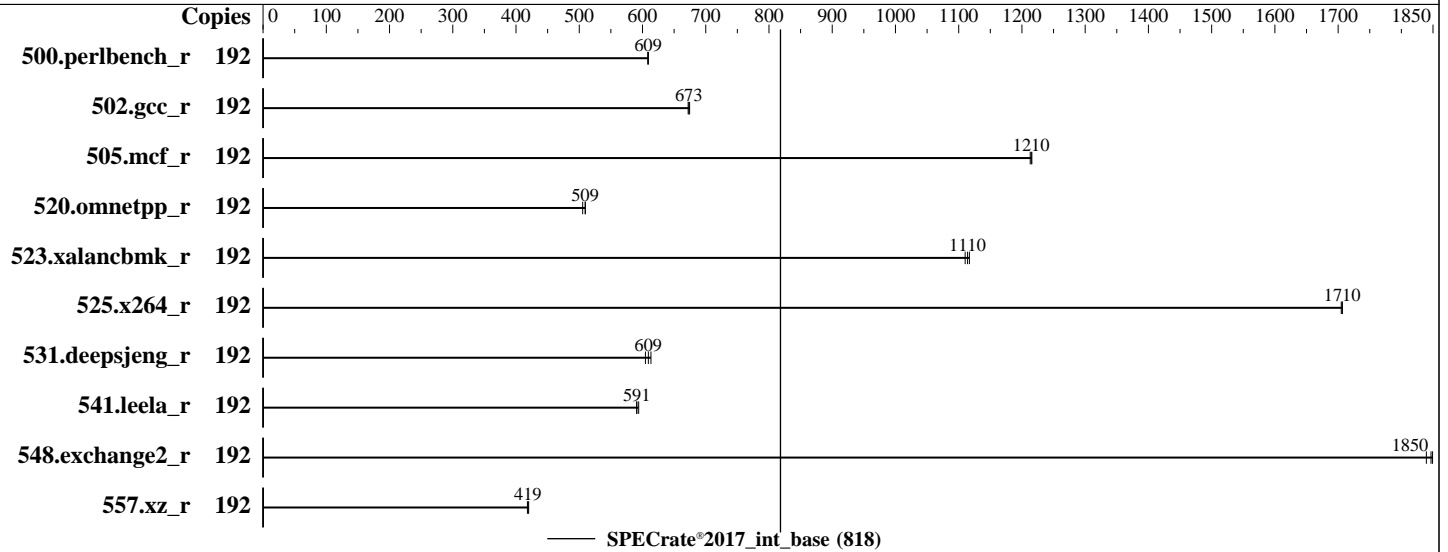

Hardware

CPU Name: Intel Xeon Platinum 8558
Max MHz: 4000
Nominal: 2100
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 260 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
Storage: 1x 480 GB M.2 NVMe SSD
Other: CPU Cooling: DLC

Software

OS: Rocky Linux 9.4 (Blue Onyx)
Kernel 5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 2.4 released Oct-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	502	609	502	608	<u>502</u>	<u>609</u>							
502.gcc_r	192	403	674	404	672	<u>404</u>	<u>673</u>							
505.mcf_r	192	255	1220	256	1210	<u>255</u>	<u>1210</u>							
520.omnetpp_r	192	498	505	<u>494</u>	<u>509</u>	494	509							
523.xalancbmk_r	192	183	1110	182	1120	<u>182</u>	<u>1110</u>							
525.x264_r	192	<u>197</u>	<u>1710</u>	197	1700	197	1710							
531.deepsjeng_r	192	<u>361</u>	<u>609</u>	359	613	364	605							
541.leela_r	192	<u>538</u>	<u>591</u>	535	594	538	591							
548.exchange2_r	192	272	1850	273	1840	<u>272</u>	<u>1850</u>							
557.xz_r	192	494	420	<u>495</u>	<u>419</u>	496	418							

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/root/cpu2017-1.1.9/lib/intel64:/root/cpu2017-1.1.9/lib/ia32:/root/cpu2017-1.1.9/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
Adjacent Cache Prefetch = Disabled
DCU Streamer Prefetcher = Disable
SNC = Enable SNC2 (2-clusters)
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable
Stale AtoS = Disable
Patrol Scrub = Disable
VT-d = Disabled
SR-IOV Support = Disabled

Sysinfo program /root/cpu2017-1.1.9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on qh007 Thu Dec 12 23:43:06 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux qh007 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed May 1 19:11:28 UTC 2024 x86_64 x86_64
x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

```
-----
2. w
 23:43:06 up 3 min,  1 user,  load average: 0.21, 0.27, 0.12
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root      pts/1    23:42    10.00s  0.89s  0.01s  /bin/bash
```

```
-----
3. Username
From environment variable $USER:  root
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4124660
max locked memory            (kbytes, -l) unlimited
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4124660
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
screen
SCREEN
/bin/bash
/bin/bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.015/templogs/preenv.intrate.015.0.log --lognum 015.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017-1.1.9
```

```
-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8558
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000283
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

```
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             INTEL(R) XEON(R) PLATINUM 8558
BIOS Model name:       INTEL(R) XEON(R) PLATINUM 8558
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):              2
Stepping:               2
Frequency boost:        enabled
CPU(s) scaling MHz:    100%
CPU max MHz:            2101.0000
CPU min MHz:           800.0000
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm
                        ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                        la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                        md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                        amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              4.5 MiB (96 instances)
L1i cache:              3 MiB (96 instances)
L2 cache:               192 MiB (96 instances)
L3 cache:               520 MiB (2 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

```

NUMA node(s): 4
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	260M	520M	20	Unified	3	212992	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 257156 MB
node 0 free: 255631 MB
node 1 cpus: 24-47,120-143
node 1 size: 258035 MB
node 1 free: 256815 MB
node 2 cpus: 48-71,144-167
node 2 size: 257994 MB
node 2 free: 256672 MB
node 3 cpus: 72-95,168-191
node 3 size: 258020 MB
node 3 free: 256433 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1055956112 kB

10. who -r

run-level 3 Dec 12 23:40

11. Systemd service manager version: systemd 252 (252-32.el9_4)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* beegfs-client.service	loaded	failed	failed	Start BeeGFS Client
* beegfs-meta.service	loaded	failed	failed	BeeGFS Metadata Server
* beegfs-mgmt.service	loaded	failed	failed	BeeGFS Management Server
* beegfs-storage.service	loaded	failed	failed	BeeGFS Storage Server

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd beegfs-client beegfs-helperd beegfs-meta beegfs-mgmtd beegfs-storage chronyd crond dbus-broker getty@ irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname nvidia-hibernate nvidia-powerd nvidia-resume nvidia-suspend nvme-fc-boot-connections openibd pbs rpcbind rsyslog rtkit-daemon sd5 selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime	rc-local systemd-remount-fs
disabled	beegfs-client@ beegfs-eventlistener beegfs-helperd@ beegfs-meta@ beegfs-mgmtd@ beegfs-storage@ canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower debug-shell dkms dnf-system-upgrade firewalld gssproxy hpl ibacm kvm_stat man-db-restart-cache-update nfs-blkmap nfs-server nftables nvidia-persistenced nvme-autoconnect opensmd opensmd@ pbs@ pesign rdisc rpmdb-rebuild rshim selinux-check-proper-disable serial-getty@ srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd2,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=a2e6e446-5557-4834-8746-478cef724ddf
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=08280141-9847-40a2-9258-7c1981ac4d51
selinux=0
rd.driver.blacklist=nouveau
modprobe.blacklist=nouveau
```

15. cpupower frequency-info

```
analyzing CPU 37:
  current policy: frequency should be within 800 MHz and 2.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

```

vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Rocky Linux 9.4 (Blue Onyx)
redhat-release  Rocky Linux release 9.4 (Blue Onyx)
rocky-release   Rocky Linux release 9.4 (Blue Onyx)
system-release  Rocky Linux release 9.4 (Blue Onyx)

```

```

-----
20. Disk information
SPEC is set to: /root/cpu2017-1.1.9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme2n1p3  xfs   216G  155G   61G  72% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         SYS-221GE-TNHT-LC2-ST036
Product Family:  SMC X13
Serial:          A919390X4903251

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

16x Micron Technology MTC40F2046S1RC56BD1 MLCC 64 GB 2 rank 5600, configured at 5200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.4
BIOS Date: 10/25/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_int_base = 818

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Base Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-12 09:43:05-0500.

Report generated on 2025-01-15 12:33:12 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.