



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212

(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802


Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

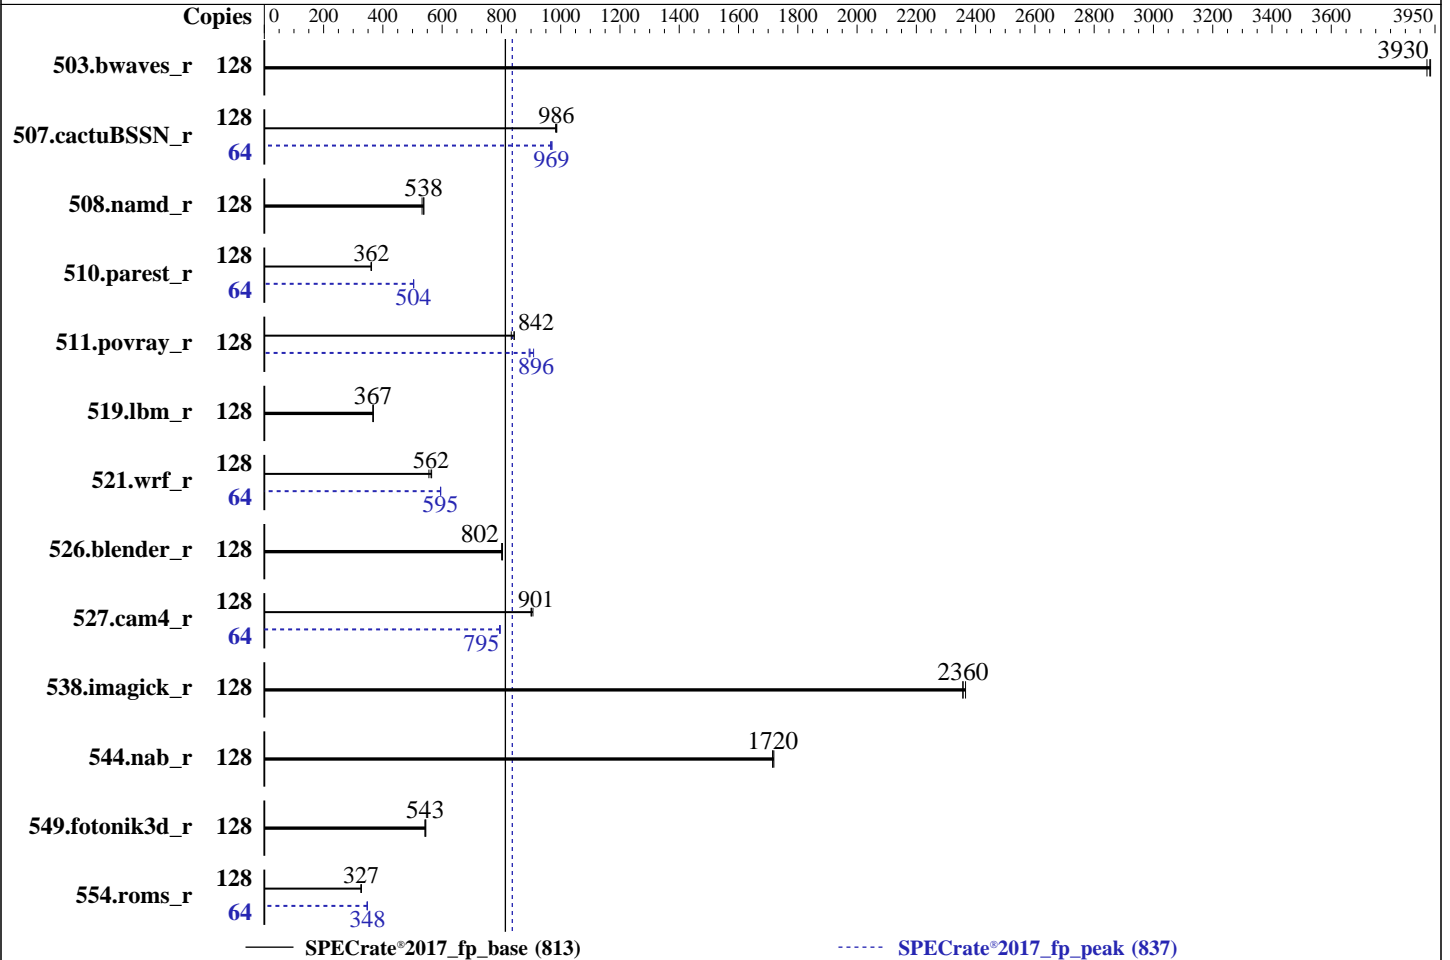

### Hardware

CPU Name: Intel Xeon Platinum 8562Y+  
 Max MHz: 4100  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB NVMe  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
 5.14.0-362.13.1.el9\_3.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.1 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer  
 performance at cost  
 of additional power.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	327	3920	326	3940	<u>326</u>	<u>3930</u>	128	327	3920	326	3940	<u>326</u>	<u>3930</u>
507.cactuBSSN_r	128	<u>164</u>	<u>986</u>	165	983	164	987	64	83.9	966	83.5	971	<u>83.6</u>	<u>969</u>
508.namd_r	128	<u>226</u>	<u>538</u>	228	532	226	538	128	<u>226</u>	<u>538</u>	228	532	226	538
510.parest_r	128	<u>926</u>	<u>362</u>	931	360	926	362	64	332	504	<u>332</u>	<u>504</u>	332	504
511.povray_r	128	354	843	359	833	<u>355</u>	<u>842</u>	128	334	894	<u>333</u>	<u>896</u>	329	909
519.lbm_r	128	<u>368</u>	<u>367</u>	368	367	367	367	128	<u>368</u>	<u>367</u>	368	367	367	367
521.wrf_r	128	508	564	516	555	<u>510</u>	<u>562</u>	64	241	594	<u>241</u>	<u>595</u>	241	595
526.blender_r	128	243	801	<u>243</u>	<u>802</u>	243	804	128	243	801	<u>243</u>	<u>802</u>	243	804
527.cam4_r	128	247	906	249	900	<u>248</u>	<u>901</u>	64	141	794	<u>141</u>	<u>795</u>	141	796
538.imagick_r	128	<u>135</u>	<u>2360</u>	135	2360	135	2370	128	<u>135</u>	<u>2360</u>	135	2360	135	2370
544.nab_r	128	126	1710	125	1720	<u>126</u>	<u>1720</u>	128	126	1710	125	1720	<u>126</u>	<u>1720</u>
549.fotonik3d_r	128	920	542	915	545	<u>918</u>	<u>543</u>	128	920	542	915	545	<u>918</u>	<u>543</u>
554.roms_r	128	623	326	<u>622</u>	<u>327</u>	622	327	64	<u>293</u>	<u>348</u>	293	347	292	348

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
We are using specific Kernel Version

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Technologies India Ltd)  
**Tyrone Camarero SDI200A3N-212**  
 (2.8 GHz, Intel Xeon Platinum 8562Y+)

**SPECrate®2017\_fp\_base = 813**  
**SPECrate®2017\_fp\_peak = 837**

**CPU2017 License:** 006802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## General Notes (Continued)

system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
 Power Technology = Custom  
 ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
 KTI Prefetch = Enable  
 LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost.localdomain Fri Dec 6 18:10:18 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
 Table of contents  
 -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 252 (252-18.el9)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. tuned-adm active
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
 1. uname -a  
 Linux localhost.localdomain 5.14.0-362.13.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Nov 24 01:57:57 EST 2023 x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
 2. w  
 18:10:18 up 5:09, 1 user, load average: 88.88, 118.18, 123.64  
 USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

```
root      tty1      13:02      5:06m  0.87s  0.01s  -bash
```

### 3. Username

```
From environment variable $USER:  root
```

### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 2062186
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 2062186
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8562Y+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000200
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
physical id 0:  apicids 0-63
physical id 1:  apicids 128-191
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               128
On-line CPU(s) list:  0-127
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
Model name:           INTEL(R) XEON(R) PLATINUM 8562Y+
BIOS Model name:     INTEL(R) XEON(R) PLATINUM 8562Y+
CPU family:           6
Model:                207
Thread(s) per core:  2
Core(s) per socket:  32
Socket(s):            2
Stepping:             2
BogoMIPS:             5600.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                    rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                    xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                    dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid
                    dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                    f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                    cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                    ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                    rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                    intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                    hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                    amx_int8 flush_l1d arch_capabilities
L1d cache:            3 MiB (64 instances)
L1i cache:            2 MiB (64 instances)
L2 cache:             128 MiB (64 instances)
L3 cache:             120 MiB (2 instances)
NUMA node(s):        4
NUMA node0 CPU(s):   0-15,64-79
NUMA node1 CPU(s):   16-31,80-95
NUMA node2 CPU(s):   32-47,96-111
NUMA node3 CPU(s):   48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-12  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128623 MB
node 0 free: 112932 MB
node 1 cpus: 16-31,80-95
node 1 size: 129016 MB
node 1 free: 115831 MB
node 2 cpus: 32-47,96-111
node 2 size: 129016 MB
node 2 free: 115872 MB
node 3 cpus: 48-63,112-127
node 3 size: 128956 MB
node 3 free: 115756 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527987216 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 252 (252-18.el9)

Default Target	Status
multi-user	starting

11. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd virtqemu vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

```

canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server
gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch
kvm_stat ledmon libvirt-guests libvirt lldpad man-db-restart-cache-update named
named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect
ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman
podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@ systemd-pstore systemd-sysext target targetclid tog-pegasus trace-cmd
virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtsecret d virtstoraged
vsftpd wpa_supplicant
indirect
pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@

```

```

-----
12. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.13.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
13. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
14. tuned-adm active
Current active profile: throughput-performance

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.3 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.3 (Plow)
system-release       Red Hat Enterprise Linux release 9.3 (Plow)
-----

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   856G  729G  127G  86% /home
-----

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:              Tyrone Systems
Product:             Tyrone Camarero SDI200A3N-212
Product Family:     Family
Serial:              0123456789
-----

```

```

-----
21. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKET 32 GB 2 rank 4800
-----

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:         Tyrone Systems
BIOS Version:        2.1
BIOS Date:           12/07/2023
BIOS Revision:       5.32
-----

```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-12  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Dec-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Technologies India Ltd)

**Tyrone Camarero SDI200A3N-212**

(2.8 GHz, Intel Xeon Platinum 8562Y+)

**SPECrate®2017\_fp\_base = 813**

**SPECrate®2017\_fp\_peak = 837**

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Technologies India Ltd)  
 Tyrone Camarero SDI200A3N-212  
 (2.8 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017\_fp\_base = 813

SPECrate®2017\_fp\_peak = 837

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
 -qopt-mem-layout-trans=4 -mprefer-vector-width=512  
 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
 -ffast-math -flto -mfpmath=sse -funroll-loops  
 -qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
 -align array32byte -auto -ljemalloc  
 -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Technologies India Ltd)

**Tyrone Camarero SDI200A3N-212**

(2.8 GHz, Intel Xeon Platinum 8562Y+)

**SPECrate®2017\_fp\_base = 813**

**SPECrate®2017\_fp\_peak = 837**

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-06 07:40:17-0500.

Report generated on 2025-01-15 12:34:58 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.