



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

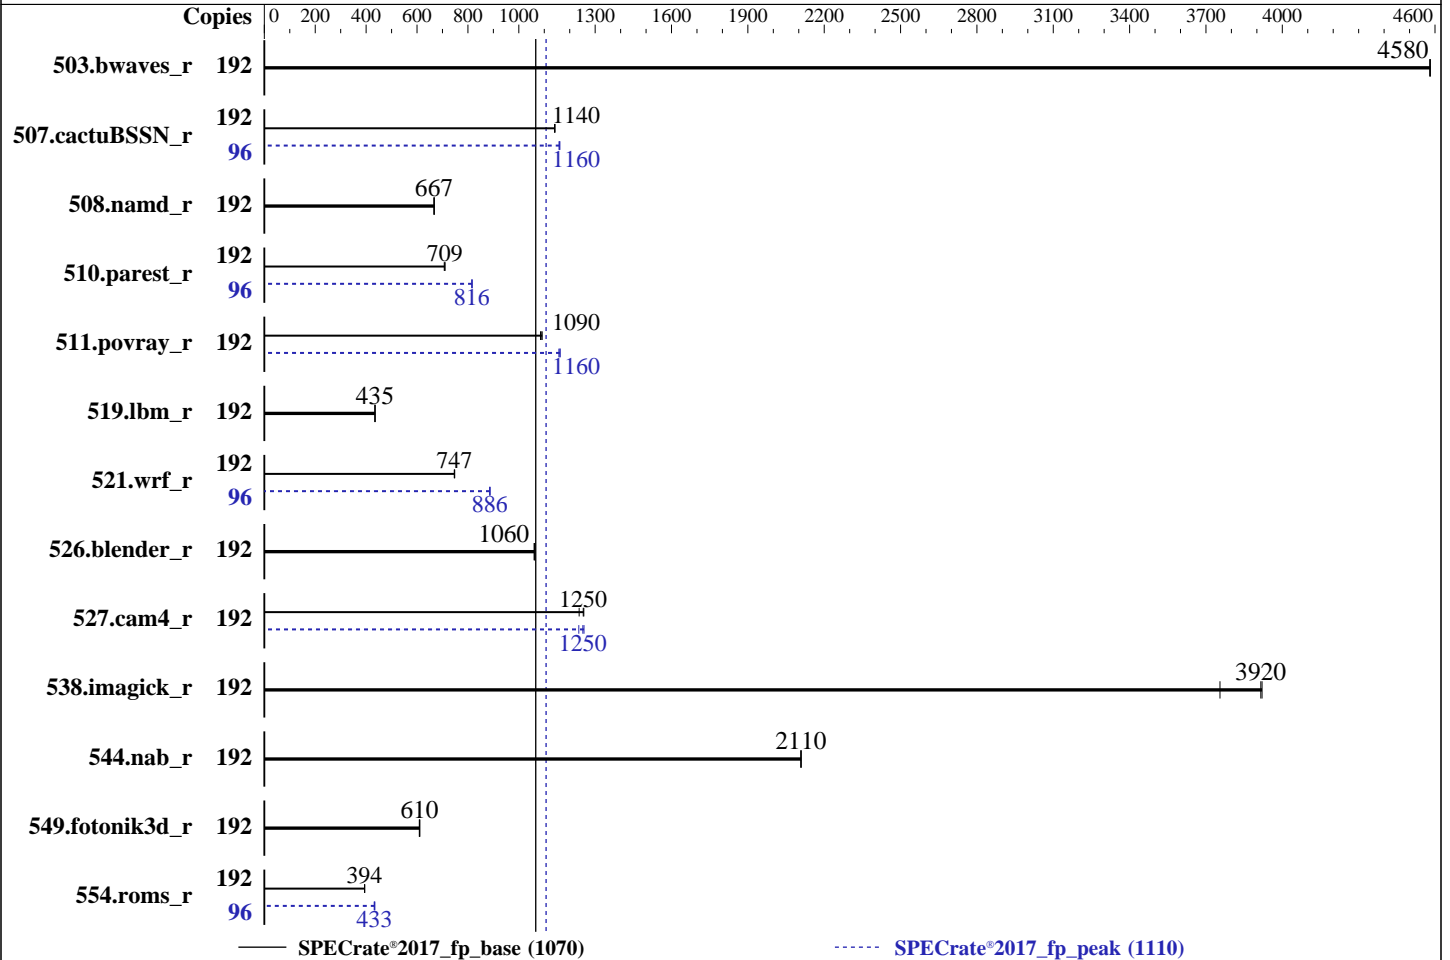

## Hardware

CPU Name: Intel Xeon Platinum 8558  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 260 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 1 x 3.2 TB NVME SSD  
 Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 6.10.45 released Aug-2024 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

CPU2017 License: 9066  
Test Sponsor: New H3C Technologies Co., Ltd.  
Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2024  
Hardware Availability: Oct-2023  
Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	420	4580	420	4580	<u>420</u>	<u>4580</u>	192	420	4580	420	4580	<u>420</u>	<u>4580</u>
507.cactuBSSN_r	192	213	1140	213	1140	<u>213</u>	<u>1140</u>	96	<u>105</u>	<u>1160</u>	105	1160	105	1160
508.namd_r	192	273	668	274	667	<u>273</u>	<u>667</u>	192	273	668	274	667	<u>273</u>	<u>667</u>
510.parest_r	192	<u>708</u>	<u>709</u>	710	707	708	710	96	<u>308</u>	<u>816</u>	308	816	308	816
511.povray_r	192	413	1090	<u>412</u>	<u>1090</u>	411	1090	192	386	1160	387	1160	<u>386</u>	<u>1160</u>
519.lbm_r	192	465	435	<u>465</u>	<u>435</u>	465	435	192	465	435	<u>465</u>	<u>435</u>	465	435
521.wrf_r	192	575	748	<u>575</u>	<u>747</u>	576	746	96	243	887	243	885	<u>243</u>	<u>886</u>
526.blender_r	192	276	1060	275	1060	<u>276</u>	<u>1060</u>	192	276	1060	275	1060	<u>276</u>	<u>1060</u>
527.cam4_r	192	<u>268</u>	<u>1250</u>	271	1240	267	1260	192	272	1240	<u>268</u>	<u>1250</u>	267	1260
538.imagick_r	192	<u>122</u>	<u>3920</u>	127	3760	122	3920	192	<u>122</u>	<u>3920</u>	127	3760	122	3920
544.nab_r	192	<u>153</u>	<u>2110</u>	153	2110	153	2110	192	<u>153</u>	<u>2110</u>	153	2110	153	2110
549.fotonik3d_r	192	1228	609	<u>1227</u>	<u>610</u>	1224	611	192	1228	609	<u>1227</u>	<u>610</u>	1224	611
554.roms_r	192	<u>774</u>	<u>394</u>	774	394	775	394	96	351	434	<u>352</u>	<u>433</u>	353	432

SPECrate®2017\_fp\_base = **1070**

SPECrate®2017\_fp\_peak = **1110**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpunew/lib/intel64:/home/speccpunew/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

### BIOS Settings:

SNC = Enable SNC2 (2-clusters)  
Intel VT for Directed I/O = Disabled  
Package C State = C6(Retention) state

### BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpunew/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Dec 16 17:09:46 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- ```

-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

-----

2. w
17:09:46 up 3 min, 1 user, load average: 0.22, 0.22, 0.10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Platform Notes (Continued)

| USER | TTY  | FROM | LOGIN@ | IDLE   | JCPU  | PCPU  | WHAT          |
|------|------|------|--------|--------|-------|-------|---------------|
| root | tty1 | -    | 17:08  | 25.00s | 1.22s | 0.01s | sh intrate.sh |

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4126686
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4126686
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.041/templogs/preenv.fprate.041.0.log --lognum 041.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpunew

```

### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8558
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 48
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8558
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):              2
Stepping:               2
CPU max MHz:            4000.0000
CPU min MHz:            800.0000
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bml hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Lld cache:              4.5 MiB (96 instances)
L1i cache:              3 MiB (96 instances)
L2 cache:               192 MiB (96 instances)
L3 cache:               520 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-23,96-119
NUMA node1 CPU(s):     24-47,120-143
NUMA node2 CPU(s):     48-71,144-167
NUMA node3 CPU(s):     72-95,168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBS-eIBRS SW
                        sequence

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 48K      | 4.5M     | 12   | Data        | 1     | 64     | 1        | 64             |
| L1i  | 32K      | 3M       | 8    | Instruction | 1     | 64     | 1        | 64             |
| L2   | 2M       | 192M     | 16   | Unified     | 2     | 2048   | 1        | 64             |
| L3   | 260M     | 520M     | 20   | Unified     | 3     | 212992 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 257667 MB
node 0 free: 256439 MB
node 1 cpus: 24-47,120-143
node 1 size: 258035 MB
node 1 free: 257413 MB
node 2 cpus: 48-71,144-167
node 2 size: 258035 MB
node 2 free: 257445 MB
node 3 cpus: 72-95,168-191
node 3 size: 257962 MB
node 3 free: 257200 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056462324 kB

10. who -r

run-level 3 Dec 16 17:07

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

| Default Target | Status  |
|----------------|---------|
| multi-user     | running |

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | YaST2-Firstboot YaST2-Second-Stage apparmor cron display-manager getty@ issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny                                                                                                                                                                                                                                                                                                                                    |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| disabled        | auditd autofs autovast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fancontrol firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd irqbalance issue-add-ssh-keys kdump kdump-early kexec-load lm_sensors lunmask man-db-create multipathd ndctl-monitor nfs nfs-blkmap nmb nvme-fc-autoconnect postfix rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd svnservice sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Platform Notes (Continued)

```
indirect          systemd-time-wait-sync systemd-timesyncd tuned vncserver@
                  pcsd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
    root=UUID=befabla9-6492-412a-9d0b-079466ad03eb
    splash=silent
    resume=/dev/disk/by-uuid/64b85326-8619-4fcb-8127-1e8683bd7471
    mitigations=auto
    quiet
    splash=silent
    mitigations=auto
-----
```

```
-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 4.00 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes
-----
```

```
-----
15. tuned-adm active
    Current active profile: throughput-performance
-----
```

```
-----
16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space     2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs     3000
    vm.dirty_ratio                 20
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold           500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy     0
    vm.nr_overcommit_hugepages    0
    vm.swappiness                  10
    vm.watermark_boost_factor     15000
    vm.watermark_scale_factor     10
    vm.zone_reclaim_mode          0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvise [madvise] never
    enabled         [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
-----
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Platform Notes (Continued)

```
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5  
-----

20. Disk information  
SPEC is set to: /home/speccpunew  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p5 xfs 522G 398G 125G 77% /home  
-----

21. /sys/devices/virtual/dmi/id  
Vendor: New H3C Technologies Co., Ltd.  
Product: H3C UniServer R4900 G6 Ultra  
Product Family: Rack  
Serial: 210235A4CHH244000019  
-----

22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Hynix HMC94AGBRA181N 64 GB 2 rank 5600, configured at 5200  
-----

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 6.10.45  
BIOS Date: 08/23/2024  
BIOS Revision: 5.32  
-----

## Compiler Version Notes

-----  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Compiler Version Notes (Continued)

```

=====
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070

SPECrate®2017\_fp\_peak = 1110

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using both C and C++:  
icpx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2023  
**Software Availability:** Mar-2024

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes  
538.imagick\_r: basepeak = yes  
544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes  
510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes  
549.fotonik3d\_r: basepeak = yes  
554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1) -flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Platinum 8558)

SPECrate®2017\_fp\_base = 1070  
SPECrate®2017\_fp\_peak = 1110

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-intel-RevB.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-intel-RevB.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-intel-RevB.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-intel-RevB.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-16 04:09:46-0500.

Report generated on 2025-01-15 12:36:59 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.