



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

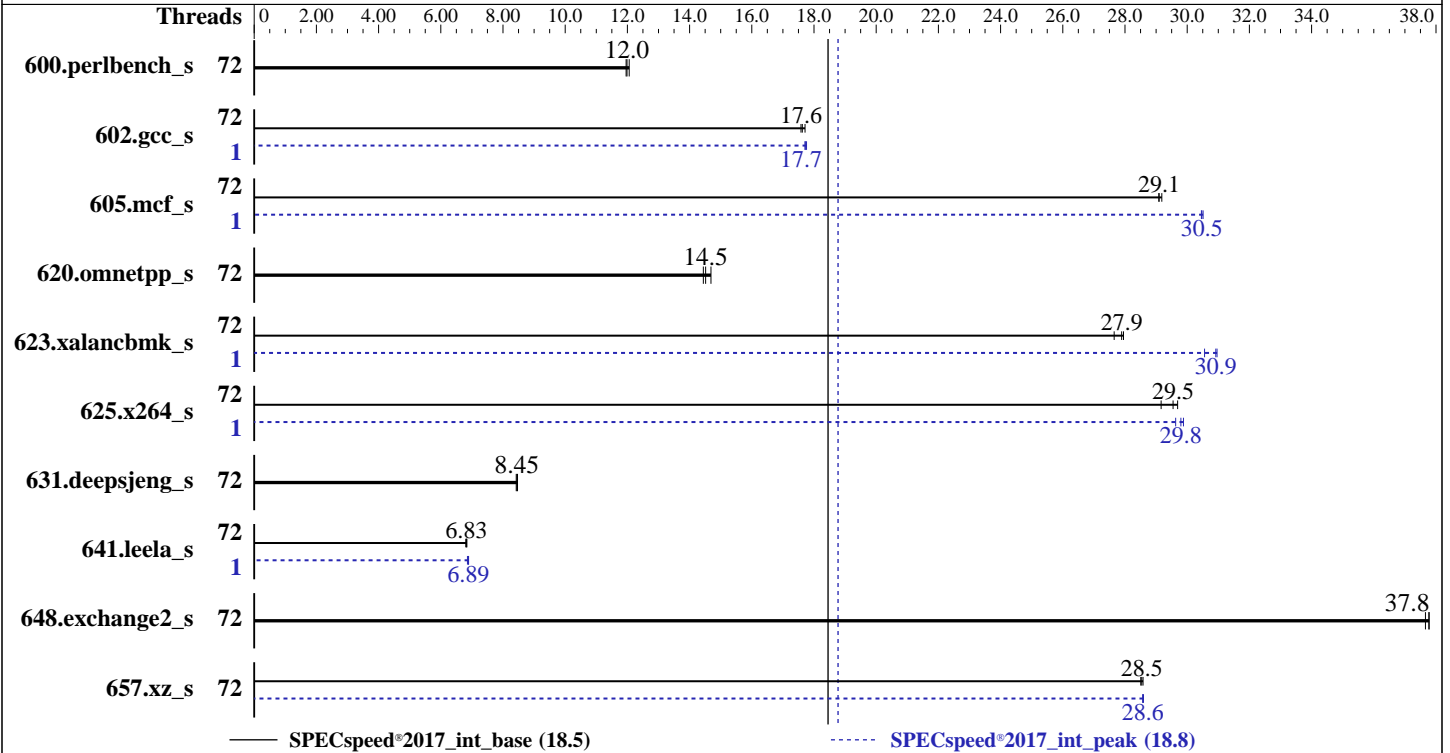

Hardware

CPU Name: AMD EPYC 9365
 Max MHz: 4300
 Nominal: 3400
 Enabled: 72 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 192 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	72	147	12.1	148	12.0	148	12.0	72	147	12.1	148	12.0	148	12.0
602.gcc_s	72	226	17.6	226	17.6	225	17.7	1	224	17.8	225	17.7	225	17.7
605.mcf_s	72	162	29.1	162	29.2	162	29.1	1	155	30.5	155	30.5	155	30.5
620.omnetpp_s	72	111	14.7	112	14.5	113	14.4	72	111	14.7	112	14.5	113	14.4
623.xalancbmk_s	72	50.8	27.9	50.7	28.0	51.2	27.7	1	45.8	31.0	46.4	30.6	45.8	30.9
625.x264_s	72	59.4	29.7	59.7	29.5	60.5	29.2	1	59.2	29.8	59.0	29.9	59.5	29.6
631.deepsjeng_s	72	170	8.45	170	8.43	169	8.47	72	170	8.45	170	8.43	169	8.47
641.leela_s	72	251	6.80	250	6.84	250	6.83	1	247	6.89	248	6.89	249	6.86
648.exchange2_s	72	77.8	37.8	77.8	37.8	78.1	37.7	72	77.8	37.8	77.8	37.8	78.1	37.7
657.xz_s	72	217	28.5	216	28.6	217	28.5	72	216	28.6	216	28.6	216	28.6

SPECspeed®2017_int_base = **18.5**

SPECspeed®2017_int_peak = **18.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-71"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "72"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-71"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
P-State set to Enabled
NUMA Nodes per Socket set to NPS2
SMT Mode set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jan 2 15:24:20 2025
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:24:21 up 4 min, 1 user, load average: 0.18, 0.33, 0.17
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094245
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094245
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.053/temlogs/preenv.intspeerd.053.0.log --lognum 053.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9365 36-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 36
siblings       : 36
2 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-5,16-21,32-37,48-53,64-69,80-85
physical id 1: core ids 0-5,16-21,32-37,48-53,64-69,80-85
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 72
On-line CPU(s) list:   0-71
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9365 36-Core Processor
BIOS Model name:       AMD EPYC 9365 36-Core Processor
BIOS CPU family:       107
CPU family:             26
Model:                  2
Thread(s) per core:    1
Core(s) per socket:    36
Socket(s):              2
Stepping:               1
Frequency boost:       enabled

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 18.5

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

CPU(s) scaling MHz:          101%
CPU max MHz:                3400.0000
CPU min MHz:                 1500.0000
BogoMIPS:                    6790.30
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                               rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                               extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                               sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                               cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                               osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                               perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                               ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                               smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                               avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                               xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                               cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                               xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                               nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                               pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                               avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                               movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                               flush_llid debug_swap
Virtualization:              AMD-V
L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   2.3 MiB (72 instances)
L2 cache:                    72 MiB (72 instances)
L3 cache:                    384 MiB (12 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-17
NUMA node1 CPU(s):           18-35
NUMA node2 CPU(s):           36-53
NUMA node3 CPU(s):           54-71
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                               disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL  SETS  PHY-LINE  COHERENCY-SIZE
L1d   48K    3.4M   12 Data          1     64     1         64
L1i   32K    2.3M    8 Instruction    1     64     1         64
L2    1M     72M   16 Unified       2   1024     1         64
L3   32M   384M   16 Unified       3  32768     1         64

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0-17
node 0 size: 193109 MB
node 0 free: 192355 MB
node 1 cpus: 18-35
node 1 size: 193531 MB
node 1 free: 192788 MB
node 2 cpus: 36-53
node 2 size: 193492 MB
node 2 free: 192885 MB
node 3 cpus: 54-71
node 3 size: 193454 MB
node 3 free: 192960 MB
node distances:
node  0  1  2  3
  0:  10  12  32  32
  1:  12  10  32  32
  2:  32  32  10  12
  3:  32  32  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      792153784 kB

```

```

-----
10. who -r
    run-level 3 Jan 2 15:20

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog sapconf smartd
                sshd systemctl-logger systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
                systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                systemd-timesyncd
generated      ntp_sync
indirect       systemd-userdbd uidd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=36ce2ea9-ca92-4f5a-b22a-9bea62fad028
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

14. cpupower frequency-info
    analyzing CPU 17:
        current policy: frequency should be within 1.50 GHz and 3.40 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.
        boost state support:
            Supported: yes
            Active: yes
  
```

```

15. tuned-adm active
    Current active profile: virtual-host
  
```

```

16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      0
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio      5
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs     3000
    vm.dirty_ratio                 8
    vm.dirty_writeback_centisecs   500
    vm.dirtytime_expire_seconds    43200
    vm.extfrag_threshold           500
    vm.min_unmapped_ratio          1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy      0
    vm.nr_overcommit_hugepages     0
    vm.swappiness                  1
    vm.watermark_boost_factor      15000
    vm.watermark_scale_factor      10
    vm.zone_reclaim_mode           1
  
```

```

17. /sys/kernel/mm/transparent_hugepage
    defrag          [always] defer defer+madvise madvise never
    enabled         [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
  
```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
  
```

```

19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6
  
```

20. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	442G	124G	318G	29%	/

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR645 V3
Product Family: ThinkSystem
Serial:          1234567890
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 5x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400, configured at 6000
13x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400, configured at 6000
 6x Samsung M321R4GA3PB2-CCPPC 32 GB 2 rank 6400, configured at 6000
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
 BIOS Vendor:      Lenovo
 BIOS Version:    KAE131I-5.30
 BIOS Date:       12/17/2024
 BIOS Revision:   5.30
 Firmware Revision: 54.6
-----

```

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
          | 657.xz_s(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
          | 641.leela_s(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
Fortran   | 648.exchange2_s(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: Same as 602.gcc_s

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

```
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamplibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamplibm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017_int_base = 18.5

SPECspeed®2017_int_peak = 18.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-02 02:24:20-0500.
Report generated on 2025-01-28 22:07:56 by CPU2017 PDF formatter v6716.
Originally published on 2025-01-28.