



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6523


Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: Mar-2023

Software Availability: Jun-2024

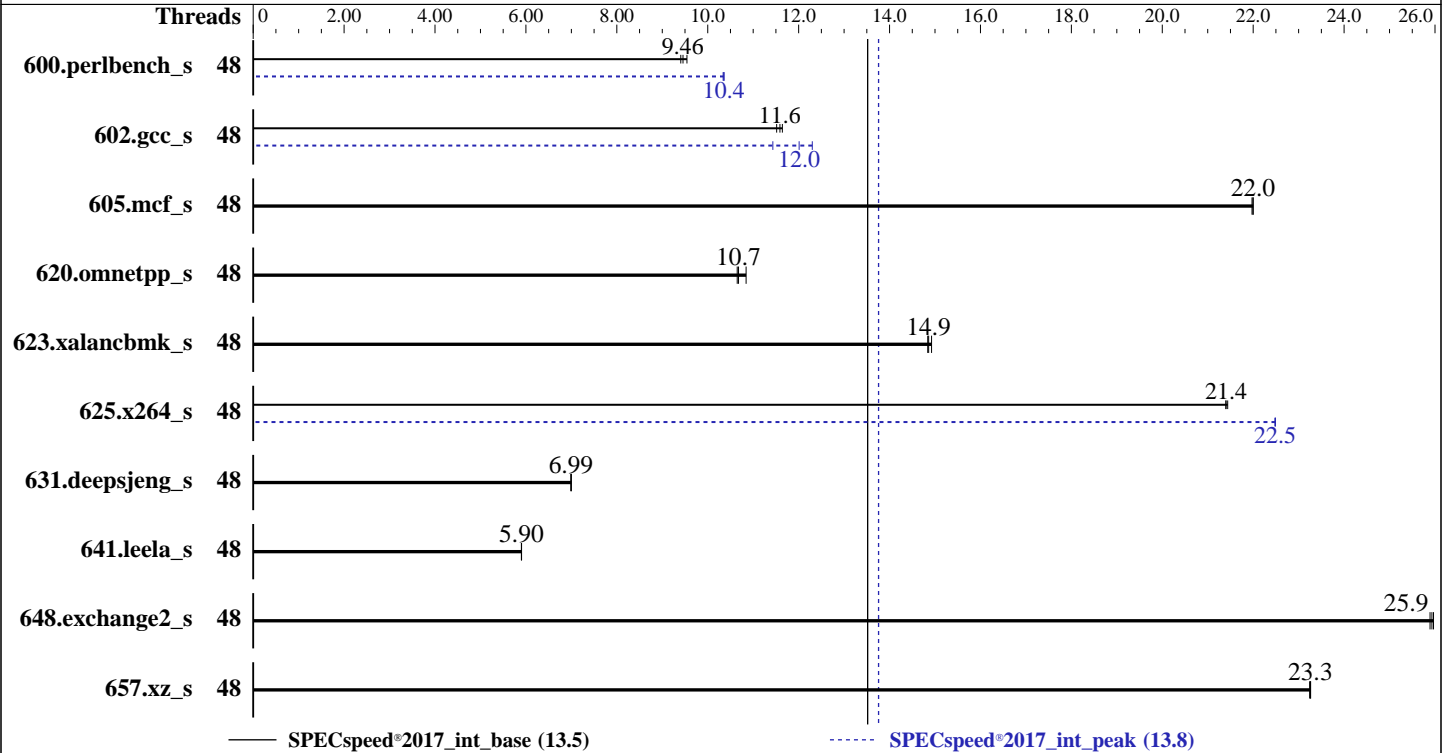

### Hardware

CPU Name: Intel Xeon Silver 4410Y  
 Max MHz: 3900  
 Nominal: 2000  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)  
 Storage: 1 x 960 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version R07 released Jun-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: Mar-2023

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	189	9.41	<b>188</b>	<b>9.46</b>	186	9.54	48	172	10.3	<b>171</b>	<b>10.4</b>	171	10.4
602.gcc_s	48	342	11.6	<b>344</b>	<b>11.6</b>	346	11.5	48	324	12.3	348	11.4	<b>332</b>	<b>12.0</b>
605.mcf_s	48	215	22.0	215	22.0	<b>215</b>	<b>22.0</b>	48	215	22.0	215	22.0	<b>215</b>	<b>22.0</b>
620.omnetpp_s	48	153	10.6	<b>153</b>	<b>10.7</b>	150	10.8	48	153	10.6	<b>153</b>	<b>10.7</b>	150	10.8
623.xalancbmk_s	48	95.5	14.8	94.9	14.9	<b>95.4</b>	<b>14.9</b>	48	95.5	14.8	94.9	14.9	<b>95.4</b>	<b>14.9</b>
625.x264_s	48	<b>82.4</b>	<b>21.4</b>	82.3	21.4	82.4	21.4	48	<b>78.4</b>	<b>22.5</b>	78.5	22.5	78.4	22.5
631.deepsjeng_s	48	205	6.99	<b>205</b>	<b>6.99</b>	205	7.00	48	205	6.99	<b>205</b>	<b>6.99</b>	205	7.00
641.leela_s	48	289	5.90	289	5.90	<b>289</b>	<b>5.90</b>	48	289	5.90	289	5.90	<b>289</b>	<b>5.90</b>
648.exchange2_s	48	<b>113</b>	<b>25.9</b>	113	26.0	114	25.9	48	<b>113</b>	<b>25.9</b>	113	26.0	114	25.9
657.xz_s	48	266	23.3	266	23.2	<b>266</b>	<b>23.3</b>	48	266	23.3	266	23.2	<b>266</b>	<b>23.3</b>

SPECspeed®2017\_int\_base = **13.5**

SPECspeed®2017\_int\_peak = **13.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/root/cpul7/lib/intel64:/root/cpul7/lib/ia32:/root/cpul7/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

**CPU2017 License:** 6523

**Test Sponsor:** Esconet Technologies Ltd.

**Tested by:** Esconet Technologies Ltd.

**Test Date:** Jan-2025

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2024

## Platform Notes

BIOS settings: Default

Sysinfo program /root/cpul7/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun Jan 19 15:00:09 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. sysctl
- 15. /sys/kernel/mm/transparent\_hugepage
- 16. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 17. OS release
- 18. Disk information
- 19. /sys/devices/virtual/dmi/id
- 20. dmidecode
- 21. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:00:09 up 14:24, 1 user, load average: 0.08, 0.05, 5.15
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU WHAT
root     tty1      -              00:38       8.00s    0.91s  0.00s sh
reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4125010
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

**CPU2017 License:** 6523

**Test Sponsor:** Esconet Technologies Ltd.

**Tested by:** Esconet Technologies Ltd.

**Test Date:** Jan-2025

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2024

### Platform Notes (Continued)

```

open files                (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 4125010
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=24 --tune base,peak -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=24 --tune base,peak --output_format all
  --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.003/templogs/preenv.intspeed.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpul7

```

#### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Silver 4410Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0005d1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores     : 12
siblings      : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 128-151

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Silver 4410Y

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

SPECspeed®2017\_int\_base = 13.5

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6523

Test Date: Jan-2025

Test Sponsor: Esconet Technologies Ltd.

Hardware Availability: Mar-2023

Tested by: Esconet Technologies Ltd.

Software Availability: Jun-2024

### Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) Silver 4410Y CPU @ 2.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
Stepping: 8
CPU(s) scaling MHz: 37%
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 48 MiB (24 instances)
L3 cache: 60 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: Mar-2023

Software Availability: Jun-2024

### Platform Notes (Continued)

L2	2M	48M	16 Unified	2	2048	1	64
L3	30M	60M	15 Unified	3	32768	1	64

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 515623 MB
node 0 free: 493650 MB
node 1 cpus: 12-23,36-47
node 1 size: 515655 MB
node 1 free: 499003 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10

```

#### 9. /proc/meminfo

MemTotal: 1056029468 kB

#### 10. who -r

run-level 3 Jan 19 00:35

#### 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

#### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify postfix purge-kernels rollback sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fsidd
grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd

```

#### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=b324a62c-a0ff-4b92-a016-970aaa76219a
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=383M,high
crashkernel=72M,low

```

#### 14. sysctl

```

kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: Mar-2023

Software Availability: Jun-2024

### Platform Notes (Continued)

```

vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
18. Disk information
SPEC is set to: /root/cpul7
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 687G 39G 647G 6% /root

```

```

-----
19. /sys/devices/virtual/dmi/id
Vendor:          HEXADATA
Product:         HDR-RM2386212I
Product Family: Server
Serial:          SN2440004157

```

```

-----
20. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Hynix TR564G48D440 64 GB 2 rank 4800, configured at 4000

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

**CPU2017 License:** 6523

**Test Sponsor:** Esconet Technologies Ltd.

**Tested by:** Esconet Technologies Ltd.

**Test Date:** Jan-2025

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2024

## Platform Notes (Continued)

8x V\_Color TR564G48D440 64 GB 2 rank 4800, configured at 4000

### 21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: GIGABYTE  
BIOS Version: R07  
BIOS Date: 06/20/2024  
BIOS Revision: 5.32

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

**CPU2017 License:** 6523

**Test Sponsor:** Esconet Technologies Ltd.

**Tested by:** Esconet Technologies Ltd.

**Test Date:** Jan-2025

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2024

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

**CPU2017 License:** 6523

**Test Sponsor:** Esconet Technologies Ltd.

**Tested by:** Esconet Technologies Ltd.

**Test Date:** Jan-2025

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Esconet Technologies Ltd.**

Hexadata HDR-RM2386212I Ver: SPR-002  
(Intel Xeon Silver 4410Y, 2.0 GHz)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = 13.8

**CPU2017 License:** 6523

**Test Sponsor:** Esconet Technologies Ltd.

**Tested by:** Esconet Technologies Ltd.

**Test Date:** Jan-2025

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

648.exchange2\_s:basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-19 04:30:09-0500.

Report generated on 2025-02-11 17:13:41 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-11.