



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523


Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

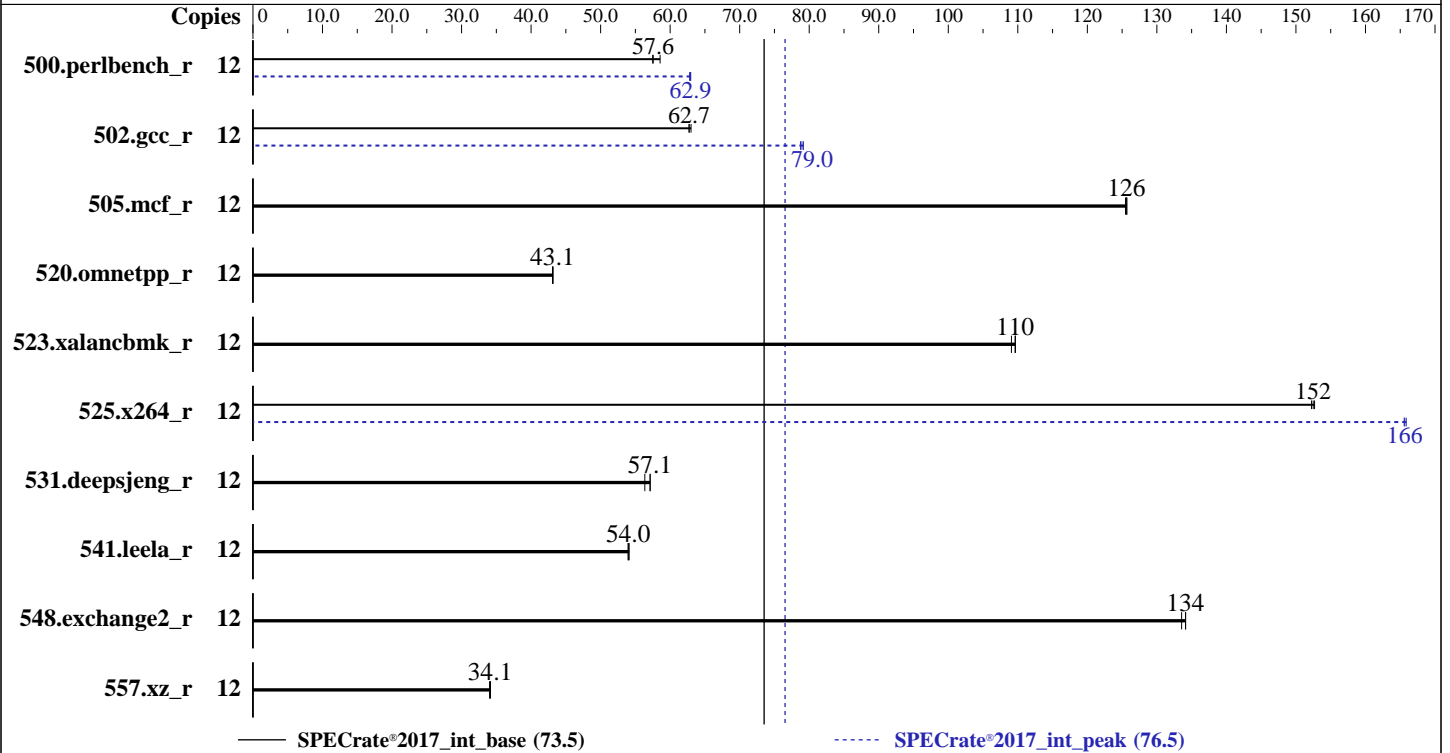

Hardware

CPU Name: Intel Xeon E-2456
 Max MHz: 5100
 Nominal: 3300
 Enabled: 6 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 18 MB I+D on chip per chip
 Other: None
 Memory: 128 GB (4 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
 Storage: 1 x 1920 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran
 Compiler for Linux;
 Parallel: No
 Firmware: Version 1.19 released Jan-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	326	58.6	332	57.5	332	57.6	12	303	62.9	304	62.8	304	62.9
502.gcc_r	12	271	62.7	270	63.0	271	62.7	12	215	79.2	215	79.0	216	78.7
505.mcf_r	12	154	126	155	125	154	126	12	154	126	155	125	154	126
520.omnetpp_r	12	365	43.2	365	43.1	365	43.1	12	365	43.2	365	43.1	365	43.1
523.xalancbmk_r	12	116	110	116	110	116	109	12	116	110	116	110	116	109
525.x264_r	12	138	152	138	152	138	153	12	127	166	127	166	127	166
531.deepsjeng_r	12	241	57.1	241	57.1	244	56.4	12	241	57.1	241	57.1	244	56.4
541.leela_r	12	368	54.0	368	54.0	367	54.1	12	368	54.0	368	54.0	367	54.1
548.exchange2_r	12	234	134	235	134	234	134	12	234	134	235	134	234	134
557.xz_r	12	380	34.1	379	34.2	381	34.0	12	380	34.1	379	34.2	381	34.0

SPECrate®2017_int_base = **73.5**

SPECrate®2017_int_peak = **76.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu17/lib/intel64:/root/cpu17/lib/ia32:/root/cpu17/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings: Default

Sysinfo program /root/cpul7/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jan 17 13:57:48 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. sysctl
- 15. /sys/kernel/mm/transparent_hugepage
- 16. /sys/kernel/mm/transparent_hugepage/khugepaged
- 17. OS release
- 18. Disk information
- 19. /sys/devices/virtual/dmi/id
- 20. dmidecode
- 21. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:57:48 up 6 min, 2 users, load average: 0.00, 0.00, 0.00
USER   TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root   tty1    -                13:54   2.00s  0.75s  0.01s  sh
reportable-ic2023.2.3-lin-core-avx2-rate-smt-on-20231121.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 512948
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 512948
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2023.2.3-lin-core-avx2-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
  ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=6 --define physicallogical
  --define no-numa --tune base,peak -o all --define drop_caches intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
  ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=6 --define physicallogical
  --define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
  base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpul7

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) E E-2456
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x122
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 6
siblings       : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         42 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                12

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```

On-line CPU(s) list:          0-11
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) E E-2456
BIOS Model name:              Intel(R) Xeon(R) E E-2456 To Be Filled By O.E.M. CPU @ 4.5GHz
BIOS CPU family:              179
CPU family:                   6
Model:                        183
Thread(s) per core:          2
Core(s) per socket:          6
Socket(s):                    1
Stepping:                     1
Frequency boost:              enabled
CPU(s) scaling MHz:          120%
CPU max MHz:                  3301.0000
CPU min MHz:                  800.0000
BogoMIPS:                     6604.80
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
                             xtpr pcdm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                             xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd
                             ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
                             fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap
                             clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                             split_lock_detect user_shstk avx_vnni dtherm ida arat pln pts hfi
                             vmmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdiri
                             movdir64b fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d
                             arch_capabilities
Virtualization:               VT-x
L1d cache:                    288 KiB (6 instances)
L1i cache:                    192 KiB (6 instances)
L2 cache:                     12 MiB (6 instances)
L3 cache:                     18 MiB (1 instance)
NUMA node(s):                 1
NUMA node0 CPU(s):           0-11
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:        Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 128262 MB
node 0 free: 127462 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 131340880 kB
```

10. who -r

```
run-level 3 Jan 17 13:51
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify postfix purge-kernels rollback sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fsidd
grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=11e13a64-e1cd-43bc-b0ff-8978490b3ae4
splash=silent
resume=/dev/disk/by-uuid/67bbde49-0a32-420a-8ae3-edf6c17b3b2b
mitigations=auto
quiet
security=apparmor
crashkernel=342M,high
crashkernel=72M,low
```

14. sysctl

```
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
18. Disk information
SPEC is set to: /root/cpul7
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       btrfs 1.7T  6.7G  1.7T   1% /root

```

```

-----
19. /sys/devices/virtual/dmi/id
Vendor:         HEXADATA
Product:        HDR-RM2386212I
Serial:         H5FSYR003208

```

```

-----
20. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  4x V-Color Technology Inc TE532G48D840 32 GB 2 rank 4800, configured at 4400

```

```

-----
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523
Test Sponsor: Esconet Technologies Ltd.
Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025
Hardware Availability: May-2024
Software Availability: Jun-2024

Platform Notes (Continued)

BIOS Version: 1.19
BIOS Date: 01/05/2024
BIOS Revision: 5.27

Compiler Version Notes

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbnk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HDR-RM2386212I Ver: RLX
(Intel Xeon E-2456)

SPECrate®2017_int_base = 73.5

SPECrate®2017_int_peak = 76.5

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: Jan-2025

Hardware Availability: May-2024

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-17 03:27:48-0500.

Report generated on 2025-02-11 17:15:18 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-11.